



Project Name:

Type:

Catalog#:

The EXL series is an LED linear light fixture with glare-free Polycarbonate Frosted diffuser that delivers general ambient lighting for multi-indoor applications such as canopies, corridors, utility rooms and garages.

Three CCTs & Wattages tunable.

Occupancy sensor and emergency backup are both available and pre-installed before shipping when ordered.

Ordering SKU:

SKU	Control	Voltage	(DLC Model#)
EXL4'	(blank)=none, Std	(blank)=120/277VAC, Std	EXL-4FT/NG/40/30/25
EXL8'	EM=Emergency Backup	HV=347/480VAC	EXL-8FT/NF/65/60/55
	OCC01=On/Off sensor		
	OCC02=Bi-Level Sensor		

Specs:

Family Model	Wattage(Tunable)	CCT(Tunable)	lm/W	Lumens	CRI
EXL4'	25W/30W/40W	35K/40K/50K	130lm/W	3250lm/3900lm/5200lm	80+
EXL8'	55W/60W/65W	35K/40K/50K	130lm/W	7150lm/7800lm/8450lm	80+

Features & Specs

Construction:

- Die-formed from code gauge cold-rolled steel.
- Post painted with high gloss baked white matte powder coat.
- Large wiring compartment and multiple knockouts to accommodate lighting controls.

Mounting:

- Surface mount.
- Suspension mount with V hook & chain.

Electrical:

- High Power Factor, low THD UL listed driver with 5KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional.
- 0-10V dimmable.

Optical:

- Glare-free wide beam frosted Polycarbonate diffuser.

Controls Options:

- Bi-Level & On/Off Occupancy sensor.
- Emergency backup.

Warranty:


- 5 years warranty for complete fixture.

Listings:

- UL
- DLC Premium
- RoHs
- IP65




Photometrics:

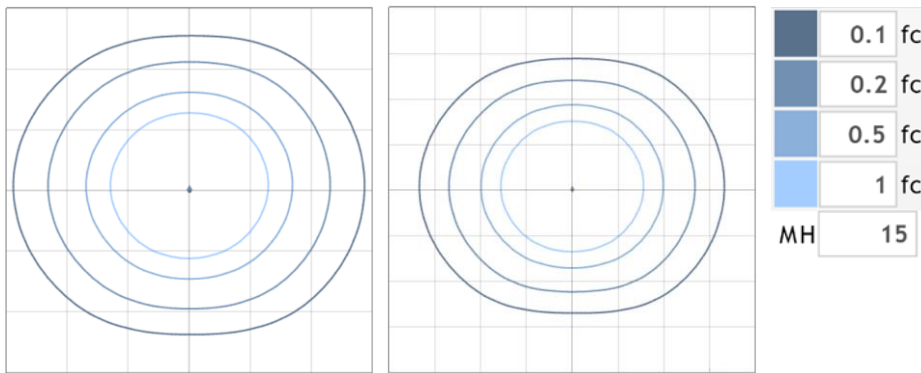

40W@15FT

65W@15FT

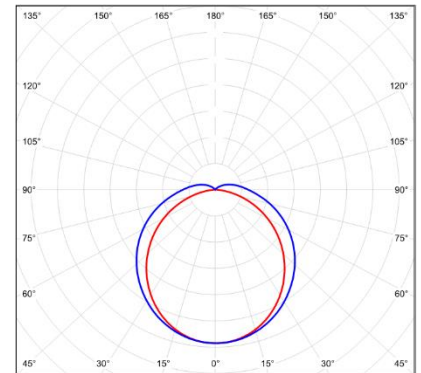

Polar Distribution

Dimensions:

