
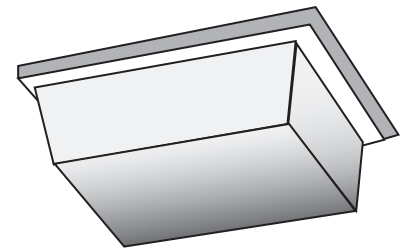


# Ceiling Utility Fixture

## Application

Energy efficient LED fixtures for wall or ceiling mount in commercial or apartment corridors.

## FEATURES & SPECIFICATIONS

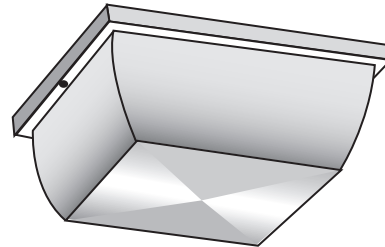

### Features

- Powder coated fitter
- Clear acrylic or white acrylic lens
- UL type 1 outdoor ballast
- PL bulbs included
- Mounting hardware
- UL listed

### Options

- High power factor ballasts
- Electronic ballasts
- Clear or white polycarbonate lens
- Tamper proof screws
- Extended back

## ORDERING INFORMATION

Example: F1010CLAC15W1200LD12030K

F1010	CLAC	15W1200L	D120	30K
Series	Lens	Wattage and Lumen	Driver	Kelvin Temperature
<b>F1010</b> 10"X10"X4"	<b>CLAC</b> Clear Acrylic Lens	<b>12W800L</b> 12 System Watts, 800 Delivered Lumens	<b>D120</b> 120V Dimmable Driver	<b>30K</b> 3000K
<b>F1212</b> 12"X12"X4"	<b>WHAC</b> White Acrylic Lens	<b>15W1200L</b> 15 System Watts, 1200 Delivered Lumens		<b>40K</b> 4000K
	<b>CLPC</b> Clear Polycarbonate Lens	<b>22W1800L</b> 22 System Watts, 1800 Delivered Lumens		
	<b>WHPC</b> White Polycarbonate Lens			

\*Consult for more options

Catalog Number:
Notes: