Specification Sheet

9/5/2013

F32T8/835/HL/ECO/IC




	ear Fluorescent Lamp /att / 85 CRI / 3500K HIGH LUMEN
	Ordering Information
	Howard Catalog Numb
	UPC Code
АВС	Description
	Package Quantity
	Physical Characterist
	Base
	Bulb Type
	Bulb Description
	Nominal Length (in)
	Base face to base face
	Base face to end of op
	(Bmin/Bmax) (in)
	End of base pin to end
	end (Cmin/Cmax) (in)
	Operating Characteri
	Nominal Wattage
	Approximate Initial Lun

HIGH LUMEN	Approved by:
Ordering Information	
Howard Catalog Number (Ordering Co	de) F32T8/835/HL/ECO/IC
UPC Code	03754
Description	T8 Low Mercury Linear Fluorescent
Package Quantity	25
Physical Characteristics	
Base	Medium Bipin
Bulb Type	T8 (8/8 inch)
Bulb Description	Tubular Fluorescent Lamp
Nominal Length (in)	48
Base face to base face (Amax) (in)	47.22
Base face to end of opposite base pin	47.40/47.78
(Bmin/Bmax) (in)	
End of base pin to end of the opposite	pin 47.67/47.78
end (Cmin/Cmax) (in)	
Operating Characteristics	
Nominal Wattage	32
Approximate Initial Lumen (Im)	3100
Approximate Mean Lumen (Im)	2950
Average Rated Life (hours)	24000
Color Temperature (K)	3500
Color Rendering Index (CRI)	85

Project:

Catalog#:

Approved by:

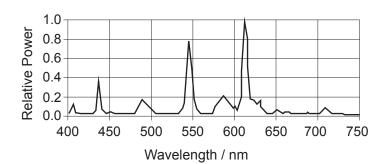



Note: Rated lamp life is 24,000 hours based on 3 hours per start and 30,000 hours based on 12 hours per start. Lamp life will be affected when using occupancy sensors, dimmers, or dimming systems. These products are Low-Mercury fluorescent lamps and pass the Federal TCLP for hazardous waste. Disposal regulations may very; check local and state regulations. Specifications subject to change.

Specifications subject to change without notice.

Howard Lighting Products | 580 Eastview Drive | Laurel, MS 39443 (toll free) 800.956.3456 | (direct) 601.422.0033 | (fax) 601.422.1652 www.HowardLightingProducts.com