


**JOB NAME:**
**CAT#:**
**TYPE:**

## APPLICATIONS

The FHBX series is offered with lens that cut glare and is dressed for applications requiring aesthetic appeal. Available with premium full specular mirrored reflectors for high efficiency lighting, white reflectors for wider distribution or standard without reflector for good economical performance. Mounting options include chain, stem or pendant cable. Custom paint finishes available. Ideal for retail applications.

Housing is 22 gauge prepainted steel. Air vents surround the driver and boards in the back of the fixture to maximize performance, reliability and life. High reflective mirror or enhanced white reflectors are computer designed to maximize photometric performance and put the light where you need it. Reflector snaps into fixture with no tools and is easily removable for driver maintenance. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, and cable kit. Integral Occupancy Sensor is optional and is ideal for wire guard applications. This fixture is not designed for surface mounting on ceiling or wall.

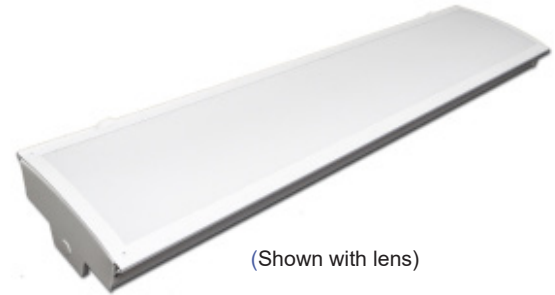

(Shown with lens)


## FEATURES & BENEFITS

- 0-10V Dimming
- Designed for pendant, stem or chain hanging
- Mounting holes are provided for simple, fast installation
- Every fixture is individually tested
- 91% Reflectivity
- $cETL_{US}$  listed for damp location
- Min CRI 82

## MOUNTING

Designed for pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation. See Buyers Guide for list of all mounting options available and sold separately.

## DIMENSIONS

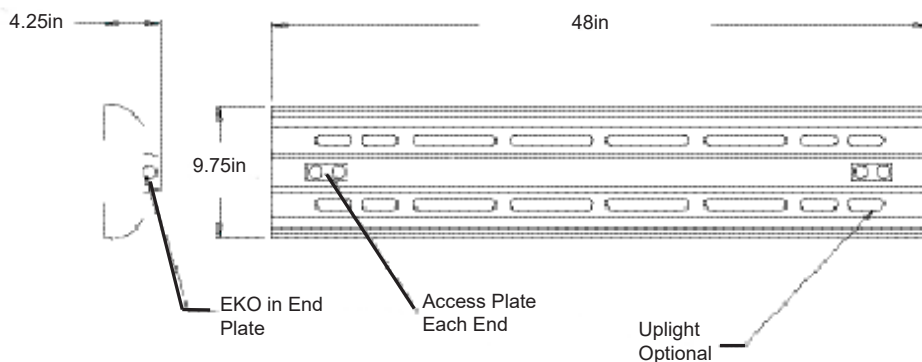

### SIZE W x L x H in inches

4 ft. - 11.25W x 48L x 4.25H

8 ft. - 11.25W x 96L x 4.25H

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: FHBX 48 LED 32 DMV 30 EM CS

FHBX		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		7. COLOR TEMP
FHBX	48 48"	LED	<u>4 ft</u>		<b>DMV</b>	120-277V Multivolt 0-10V Dimmable	<b>(Blank)</b>	No lens	<b>30</b> 3000K
	96 96"		<b>32</b>	32 Watts 3450 lumens	<b>SDMV</b>	Step dimming Multivolt	<b>FR</b>	Frosted	<b>35</b> 3500K
			<b>48</b>	48 Watts 5640 lumens	<b>DHV</b>	347-480VAC 0-10V Dimming			<b>40</b> 4000K
			<b>57</b>	57 Watts 6400 lumens	<b>D347V</b>	347VAC 0-10V Dimming			<b>50</b> 5000K
			<b>72</b>	72 Watts 8200 lumens					
			<u>8 ft</u>		<b>D120</b>	Triac Dimming 120VAC			
			<b>97</b>	97 Watts 11300 lumens	<b>TDMV</b>	Triac Dimming 120- 277VAC			
			<b>114</b>	114 Watts 12800 lumens	<b>D277</b>	Triac Dimming 277VAC			
			<b>144</b>	144 Watts 19500 lumens					

8. EM(O)'	
<b>EM</b>	10W, 840 lumen, battery backup
<b>EM5</b>	5W, 600 lumen battery backup
<b>EM7</b>	7W, 840 lumen battery backup

9. CORD(O)'	
<b>CS</b>	6 ft, 3 wire
<b>CS8</b>	8 ft. cord, no plug
<b>CS12</b>	12 ft. cord
<b>WP</b>	6 ft. 3 wire, whip
<b>WP10</b>	6 ft. 3 wire, whip

Size	Wattage	Initial Lumens (lm)	Efficacy (lm/W)	Kelvin Temperature	CRI
48"	32	3450	108	3000k	82+
				3500k	
				4000k	
				5000k	
48"	48	5650	118	3000k	82+
				3500k	
				5000k	
48"	57	6400	112	3000k	82+
				3500k	
				5000k	
96"	97	11300	116	3000k	82+
				3500k	
				5000k	
96"	114	12800	112	3000k	82+
				3500k	
				5000k	

**NOTES:**

<sup>1</sup> O is optional

Dimensions and specifications subject to change without notice.