

WM SERIES - LED Mini Non Cutoff Wall Pack

The WM SERIES - LED Mini Non Cutoff Wall Pack, Up to 119 lm/W, IP65 Wet Location, Premium Outdoor Luminaire.

Project:
Date:
Catalog No:
Prepared By:

Premium Features

Lumen Output	2020 to 2700 lumens
Efficacy	Up to 119 lm/W
Input Voltage	120-277V
Dimmable	No
CCT	5000K
IP Rating	IP65 Wet Location
Warranty	5 Years

Includes integrated Photocell Sensor



Applications

Premium outdoor luminaire suitable for building exteriors, entryways, and general security.

Mounting

Wall mounted installation.

Construction

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. IP65 Wet Location rated for dust-tight, water jets: IEC 60529.

Optics

Anti-UV Clear Prismatic Polycarbonate Lens.

Controls

Includes integrated Photocell Sensor.

Electrical

Input voltages 120-277V. Operating temperatures -40°F to 104°F (-40°C to 40°C).

Listings

UL certified to meet US and Canadian standards. FCC, CE and RoHS compliant. Listed to qualify for energy-efficient LED lighting rebates.

Warranty

5 yr / 50K hrs. View at: <https://falkorindustry.com/warranty/>.

Correlated Color Temperatures (CCT)

5000K



Specifications

Energy Data

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 17W, 25W

Power Factor: >0.9

Total Harmonic Distortion: <20%

Operating Temperature: -40°F to 104°F (-40°C to 40°C)

Lighting Data

Lumens: 2020, 2700

Lumens Per Watt: Up to 119 lm/W

Color Correlated Temperature (CCT): 5000K

Dimmable: No

Color Rendering Index (CRI): >70

L70: 50000 hours

Ordering Information


Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions	Weight
MWM0117W[120-277V]	17W	120-277V	0.14A@120V, 0.06A@277V	2020	119 lm/W	5000K	No	Dark Bronze	8.38"L x 5.84"W x 3.52"D	2.03 lbs
MWM0125W[120-277V]	25W	120-277V	0.21A@120V, 0.09A@277V	2700	108 lm/W	5000K	No	Dark Bronze	8.38"L x 5.84"W x 3.52"D	2.03 lbs

Shipping Information


Model Size	Shipping Dimensions	Shipping Weight	Quantity /Box
All Models	20.00"L x 19.00"W x 9.00"D	33.50 lbs	12

Physical Dimensions

All Models 8.38"L x 5.84"W x 3.52"D

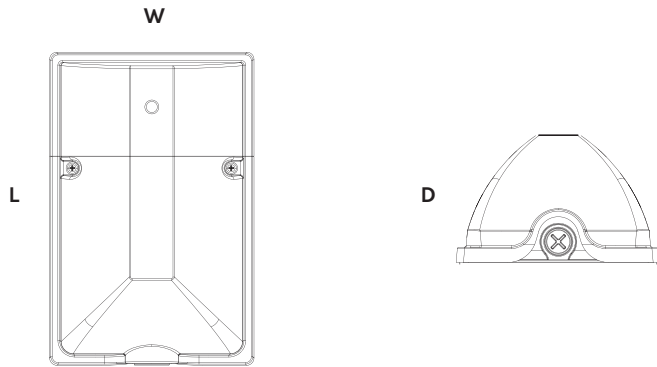

Photometric Characteristics

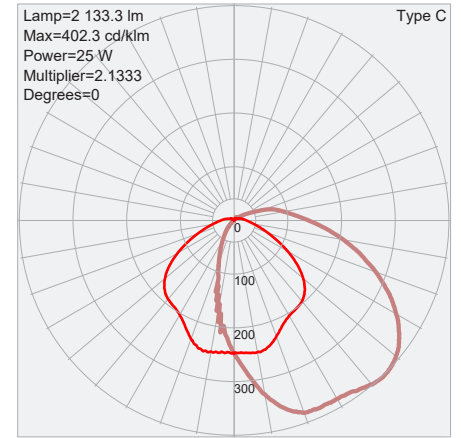

*Example of 25W 5000K

