


# Canopy Lighting FORGE



# Canopy Lighting FORGE

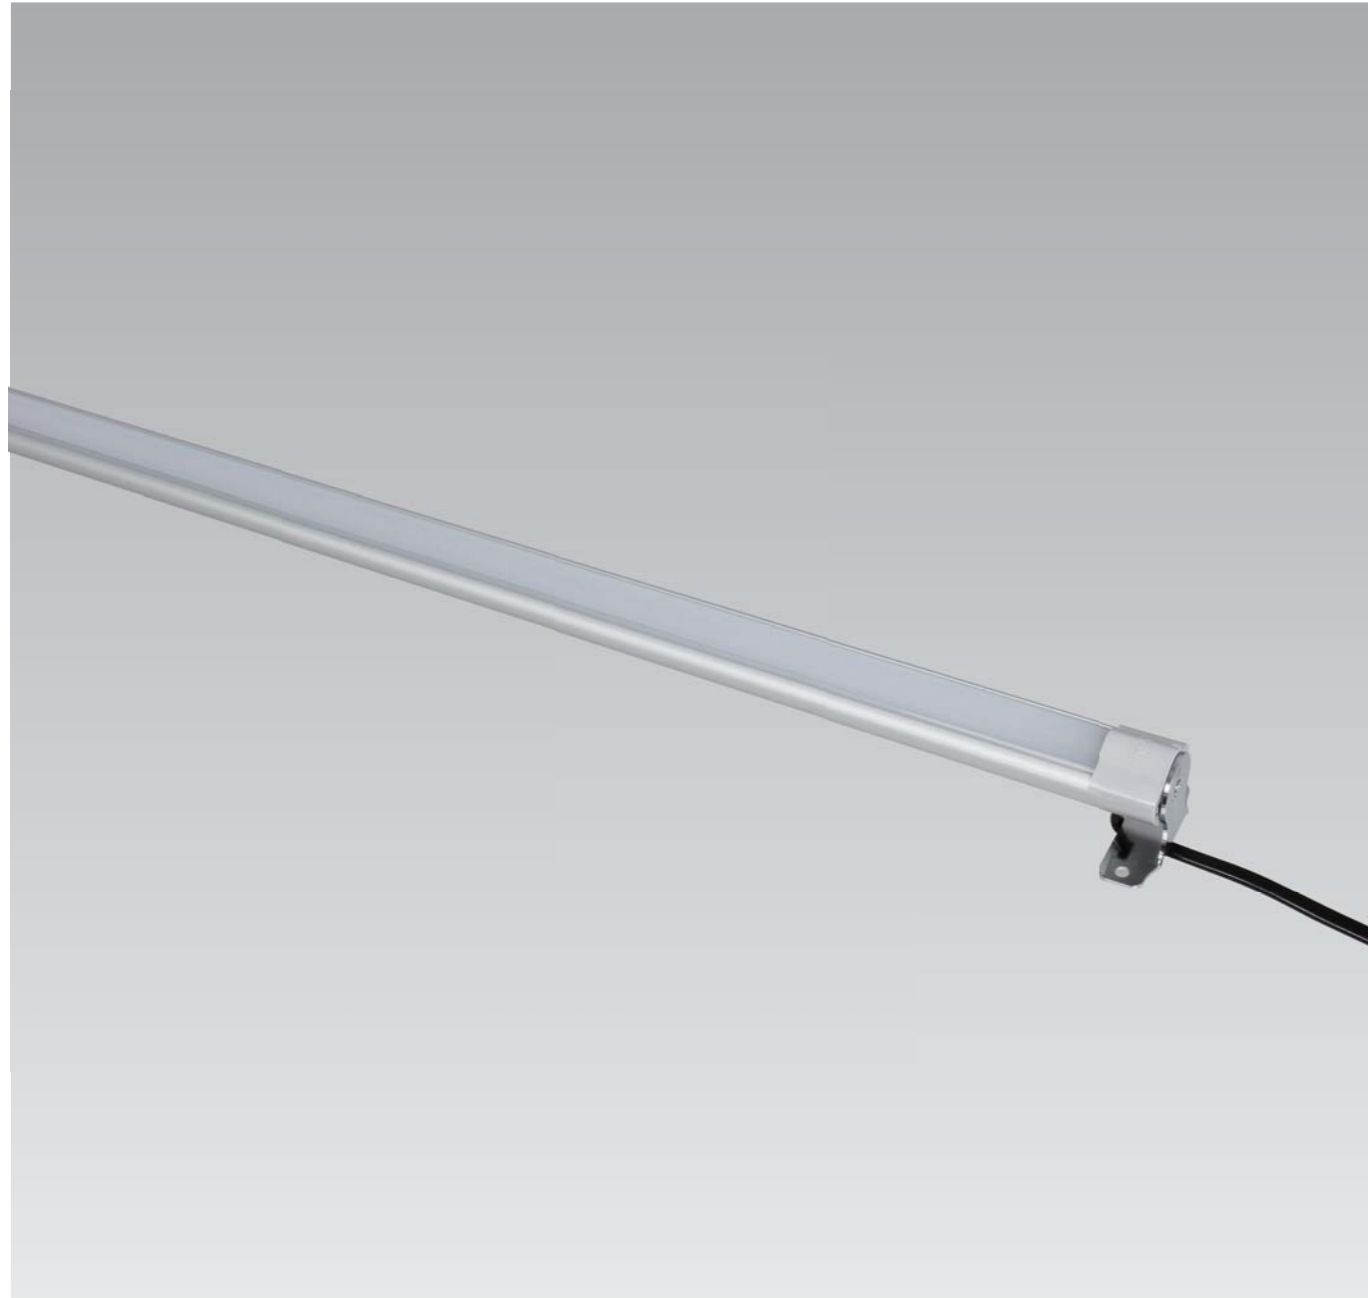


# Canopy Lighting FORGE




- Anti-glare design
- Delicate and elegant appearance
- Linkable, max. linkable length: 12' per run
- Bright and consistent illuminance for display area
- Less heat radiation, more energy saving
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- IP rating: IP65 (for wet locations)
- Ta: -13°F~122°F (-25°C~50°C)
- Material: Aluminum alloy



## Dimensions: (inches/mm)



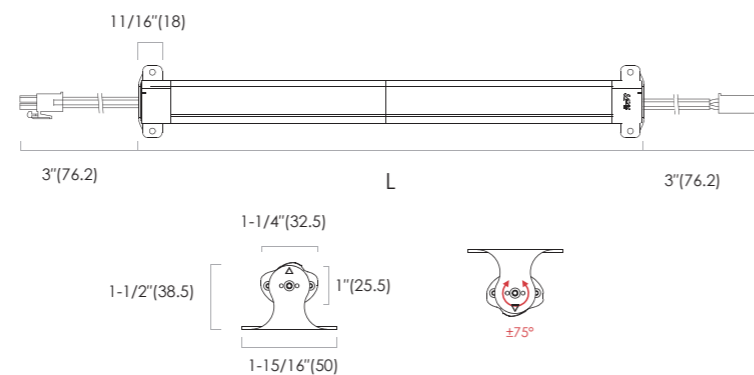


## Wiring Diagram

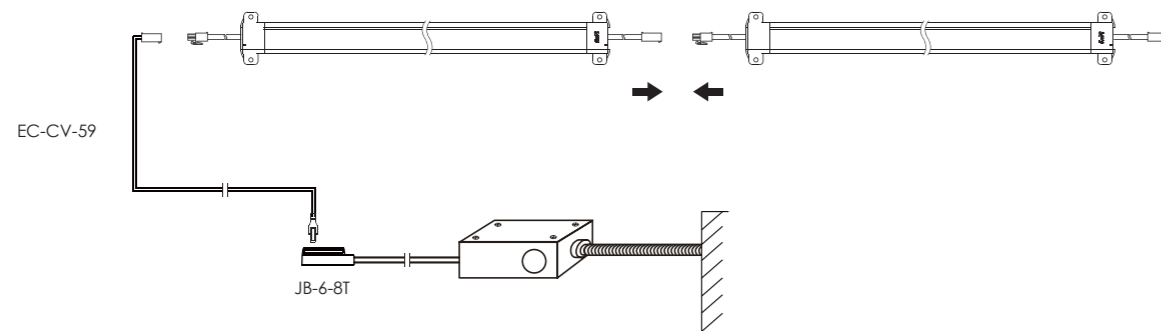

Center Beam FC

Specialized Candlepower Distribution

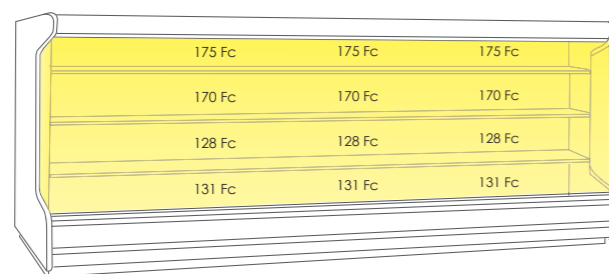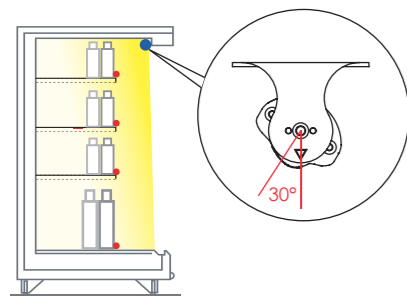

# Canopy Lighting FORGE

## How to order using our catalog numbers:

Example: FORGE-3530KSS

Series	Length	Color Temp	Finish	Installation
FORGE	35 - 34.5" (876mm) 47 - 46.6" (1181mm)	30K - 3000K 40K - 4000K	S - Silver	S - Screw Mounting

Catalog No.	Model	Description				Included	Max. Pcs Per LED Power Supply
		Rated Input	Ra	Wattage	Luminous Flux (TYP@4000K)		
FORGE-3530KSS	FORGE-L126-24V	24VDC	85	21W	2100lm	1 pc LED fixture 4 pcs Screws	96W (9-9624DL-26)
FORGE-3540KSS							4 pcs
FORGE-4730KSS	FORGE-L168-24V	24VDC	85	28W	2800lm		3 pcs
FORGE-4740KSS							

\*Note: 12' per run. Multiple runs not to exceed max. driver wattage.

## How to choose your driver & cables:

Catalog No.	Description	Photo
EC-CV-59	Extension cable 59" (used as input cable or soft connector)	
JB-6-8T	6-way splitter, JB-6-3 input cable 8", end tinned	
9-9624DL-26	Model: SLD96-24VC-UN1 Matching 1-10V dimmable driver, max. 96W. Input: 120-277VAC 9" hard wire. Output: 24VDC 26" hard wire.	

\*Note: For alternative driver configurations, please contact our sales department.

## Optional:

Catalog No.	Description	Photo
EC-CV-12	Extension cable 12" (used as input cable or soft connector)	

# Canopy Lighting FORGE

## Installation

