



Texas Fluorescents
Reinvented

HBCA Series

Premiere LED Aisle High Bay

FEATURES & SPECIFICATIONS

INTENDED USE


High efficiency LED engineered for premium performance in medium and high ceiling applications ideally suited for aisle, warehouses, manufacturing plants, sports facilities and garage. A precision-formed reflector system available in highly reflective enhanced aluminum reflector achieve maximum light output for ceilings from 15 feet to 40 feet. The unique arrangement is ideal for wide area lighting to put the light exactly where you need it with less fixtures. Based on ceiling height, these fixtures can replace an HID high bay using half of the wattage. Surface, pendant, chain or stem mounting. Highest quality materials and workmanship.

SIZE W x L x H in inches

7.899W x 48.00L x 4.30Dp

CONSTRUCTION

Housing is 22 gauge prepainted steel. Air vents surround the drivers in the back of the fixture to maximize LED and driver performance, reliability and life. High reflective enhanced aluminum reflectors are computer designed to maximize photometric performance and put the light where you need it. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, cable kit and surface mount.

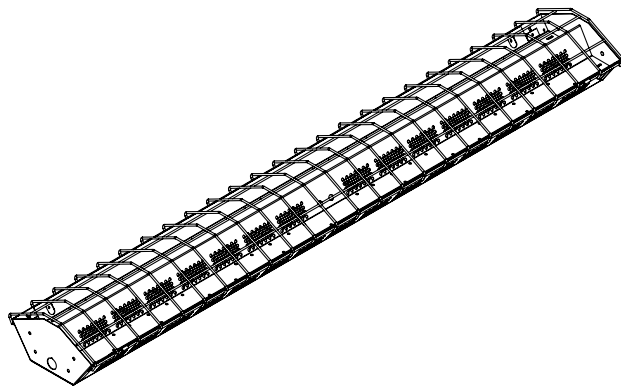

MOUNTING

Designed for surface, pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation. See Buyers Guide for list of all mounting options available and sold separately.

TYPICAL OPTIONS AND ACCESSORIES


Emergency ballasts, Cord sets, whips, occupancy sensors, Hanging kits, Wire guards. Contact factory for additional options.

ORDERING INFORMATION

Example: HBCA48LM280W30000LA10DMV50K

Series	Lens	Wattage and Lumen	Reflector	Driver	Color Temperature	Options
HBCA 4ft LED Aisle High Bay	Blank No Lens DFFR Door Frame with Frosted Smooth Acrylic	N110W16000L 110 System Watts, 16000 Delivered Lumens N162W24000L 162 System Watts, 24000 Delivered Lumens M280W30000L 280 System Watts, 30000 Delivered Lumens	A10 Aluminium reflector, no uplight, standard distribution	DMV 0-10V	50K 5000K	MDT4 Occupancy Sensor Wide Angle MDF4 Occupancy Sensor and Daylight CS 5-15P 120V 8ft. Cord & Plug CC12 L7-15P 277V 8ft. Cord & Plug C8 8ft. Cord, No Plug WP 6 ft. 3 wire, Whip WP10 6ft. 4 Wire, Whip

DIMENSIONS

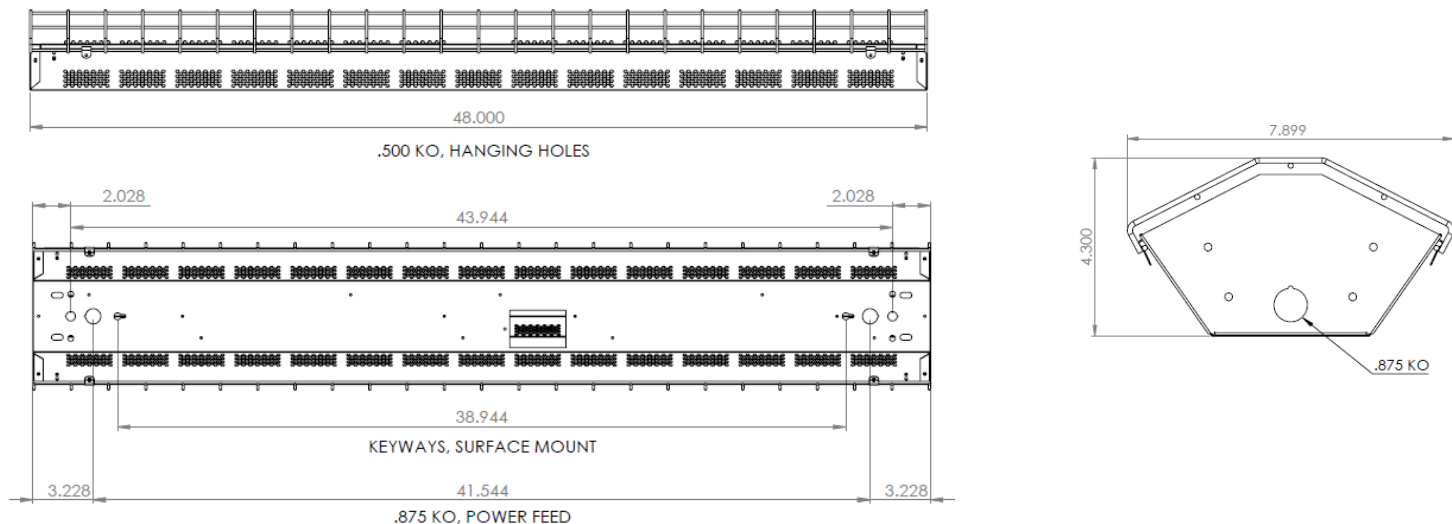

Saylite
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:
Notes: