




FEATURES & SPECIFICATIONS


- 120V INPUT VOLTAGE, 50/60Hz
- CONSTANT CURRENT
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F) - ESTIMATED 50,000 HRS L70*
- THERMALLY PROTECTED LED ARRAY
- WHITE POWDERCOATED ALUMINUM BASE AND P.C. DIFFUSER
- CEILING MOUNT ONLY
- UL/CUL LISTED FOR DAMP LOCATION
- STANDARD PACK QTY: 8 (11" MODEL) or 6 (14" MODEL)
- TWIST LOCK LENS
- DIMMABLE



RoHS
compliant

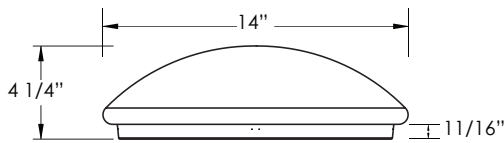

• Size: 14"D x 4.25"H

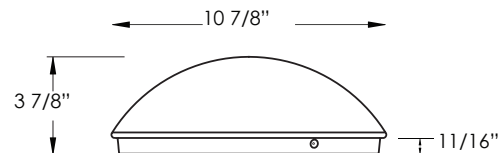

• Size: 11"D x 3.875"H

EX: HOTCE13W900LD12030K

ORDERING INFORMATION

| Series | Wattage | @ a Yb | Driver | 7c'cf HYa dYfh fY |
|----------|------------------|--------------------|-------------|-------------------|
| HOTCE11@ | 13W - 13 Wattage | 900L - 900 Lumen | D120 - 120V | 30K - 3\$\$\$? |
| | 14W - 14 Wattage | 1350L - 1350 Lumen | D120 - 120V | 40K - 4\$\$\$? |
| HOTCE14L | 14W - 14 Wattage | 1350L - 1350 Lumen | D120 - 120V | 30K - 3\$\$\$? |
| | 23W - 23 Wattage | 1850L - 1850 Lumen | D120 - 120V | 40K - 4\$\$\$? |