

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, mini body strip for size critical applications such as display cabinets, coves, and other areas where space is at a premium.


SIZE W x L x H in inches (mm)

1.62W x 1.62H (40 x 40)

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back, side, and end of housing. Ballast covers or reflectors attach without tools to simplify ballast access.

- Single unit length and tandem length fixtures available.
- W3x, economical white steel reflectors, for abusive locations
Two styles: symmetric and asymmetric
- M2, premium full specular (mirrored) reflectors, for maximum efficiency
Two styles: symmetric and asymmetric

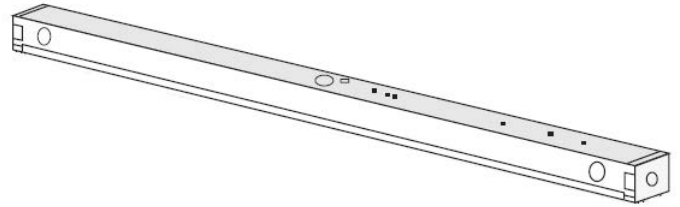

MOUNTING

Surface mount.

TYPICAL OPTIONS AND ACCESSORIES

Whips, fuses, and cord sets. See options page at the end of the T02Strip section, or contact factory for more details.

ORDERING INFORMATION

STANDARD - 4FT

Example: KDS48LS28W3200LDMV40K

KDS	48L	S28W3200L		DMV	40K	
Series	Length	Wattage and Lumen	Reflectors	Driver	Color Temperature	Options
KDS Mini Body Strip with or without Reflectors	48L 48"	S24W2800L 24 System Watts, 2800 Delivered Lumens S28W3200L 28 System Watts, 3200 Delivered Lumens	Blank No Reflector W3 0 White Steel reflector Standard Mount	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

HIGH OUTPUT - 4FT



KDS	48L	H35W4000L		DMV	40K	
Series	Length	Wattage and Lumen	Reflectors	Driver	Color Temperature	Options
KDS Mini Body Strip with or without Reflectors	48L 48"	H35W4000L 35 System Watts, 4000 Delivered Lumens	Blank No Reflector W3 0 White Steel reflector Standard Mount	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug



* Consult for more options


Catalog Number:
Notes:

Series KDS Mini Body Strip

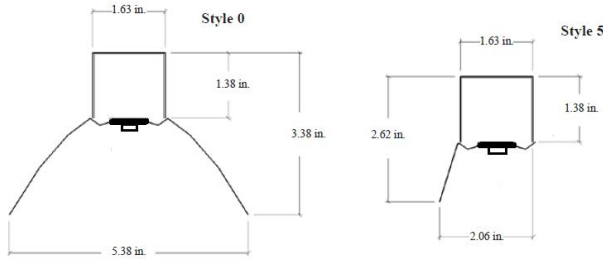

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

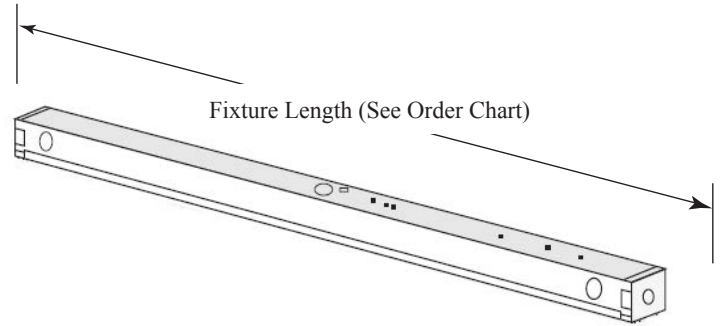

ORDERING INFORMATION

Example: **KDS96LS57W6400LDMV40K**

STANDARD - 8FT

KDS	96L	S57W6400L		DMV	40K
Series	Length	Wattage and Lumen	Reflectors	Driver	Color Temperature
KDS Mini Body Strip with or without Reflectors	96L 96"	S32W4050L 32 System Watts, 4050 Delivered Lumens S48W5650L 48 System Watts, 5650 Delivered Lumens S57W6400L 57 System Watts, 6400 Delivered Lumens	Blank No Reflector W3 0 White Steel reflector Standard Mount	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K
					Options
					WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

HIGH OUTPUT - 8FT

KDS	48L	H72W8100L		DMV	40K
Series	Length	Wattage and Lumen	Reflectors	Driver	Color Temperature
KDS Mini Body Strip with or without Reflectors	96L 96"	H72W8100L 72 System Watts, 8100 Delivered Lumens	Blank No Reflector W3 0 White Steel reflector Standard Mount	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K
					Options
					WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug



* Consult for more options

Catalog Number:
Notes: