

LED T8 Tube Lights



7/9
watts

400-
750
lumens

60-80
lpw

replaces
40/60W
incandescent

features

- Cost-effective replacement for 2' and 4' T8 G13 base linear fluorescent
- Frosted lens for uniform diffuse appearance
- Ultra-high performance LEDs deliver 100 lpw
- Lifetime exceeds 25,000 hrs
- Up to 50% instant energy savings
- Choice of 3500K, 4000K, and 5000K color temperatures



performance

- 9W LED replaces 17W fluorescent
- 18W LED replaces 32W fluorescent
- Long life: 25,000 hours
- 80+ CRI
- Integral 120~277V drivers provide easy installation
- Wide ambient temperature range from -20°C (-4°F) to 40°C (104°F)
- For use with non-shunted tombstone lampholders
- <20% Total Harmonic Distortion


applications

- Highbays
- Troffers
- Industrial Strips
- Warehouses
- Stairwells
- Cold Storage




LED T8 Tube Lights

dimensions

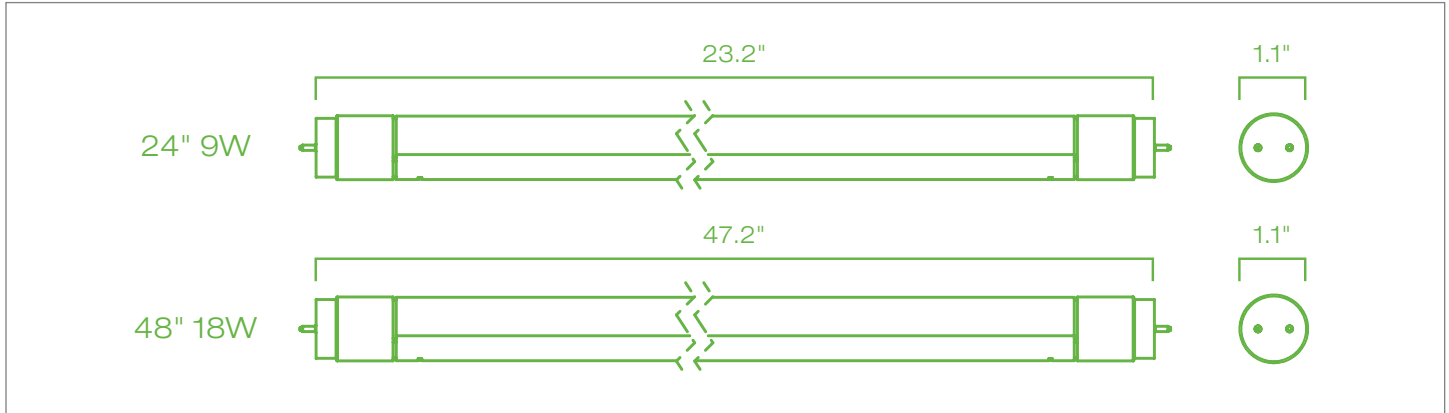

photometrics

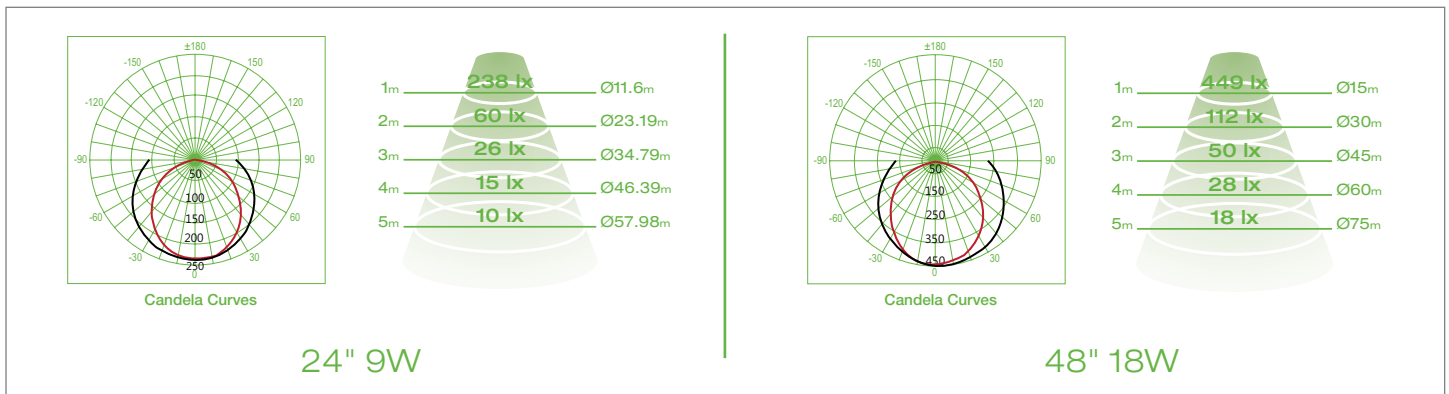

ordering information

Order Code	Litespan Part #	Length	Watts	Lumens	CCT	CRI	Pol. Carb. Tube	Beam Angle	Base	Life Hours
08532	LED18WT8F/48/835K-G4A**	4'	18W	1,600	3500K	80+	Frosted	160°	G13	25,000
08533	LED18WT8F/48/840K-G4A**	4'	18W	1,600	4000K	80+	Frosted	160°	G13	25,000
08534	LED18WT8F/48/850K-G4A**	4'	18W	1,600	5000K	80+	Frosted	160°	G13	25,000
08535	LED9WT8F/24/835K-G4A**	2'	9W	800	3500K	80+	Frosted	160°	G13	25,000
08536	LED9WT8F/24/840K-G4A**	2'	9W	800	4000K	80+	Frosted	160°	G13	25,000
08537	LED9WT8F/24/850K-G4A**	2'	9W	800	5000K	80+	Frosted	160°	G13	25,000

**While supplies last

watch > like > follow



selection. solutions. simplicity. eiko.com

23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335