

# LED Direct CFL Replacement Lamps

## features



13  
watts

900  
lumens

69  
lpw

vertical/  
horizontal

- Directly replaces 18W, 26W, 32W and 42W CFLs (4-pin) - no need to bypass CFL ballast
- Plug-and-Play installation
- Delivers 900 lumens of usable light
- Horizontal (with rotatable base) or vertical
- Diecast aluminum heatsink ensures years of maintenance-free performance
- Choice of 2700K, 3000K, 35000K and 4000K color temperatures
- Instant-on with no warmup, unlike CFLs
- Dimmable (ballast dependent)
- 5 year limited warranty
- Shatter resistant for reduced risk of injury and breakage



## performance

- 900 lumens @ 13W
- Input voltage driven by installed CFL electric ballast
- Power factor:  $\geq 0.95$
- 83 CRI
- 50,000 hour life
- Consumes 1/2 the energy and lasts 5x longer than 26 watt compact fluorescent
- UL/cUL listed for damp locations
- Suitable for use in totally enclosed recessed fixtures
- 120° beam angle
- **Not compatible with all ballasts. See eiko.com for list of tested ballasts**


## applications

- Commercial/Residential
- Hotel/Hospitality
- Education
- Healthcare
- Retail
- Property Management




# LED Direct CFL Replacement Lamps

## dimensions

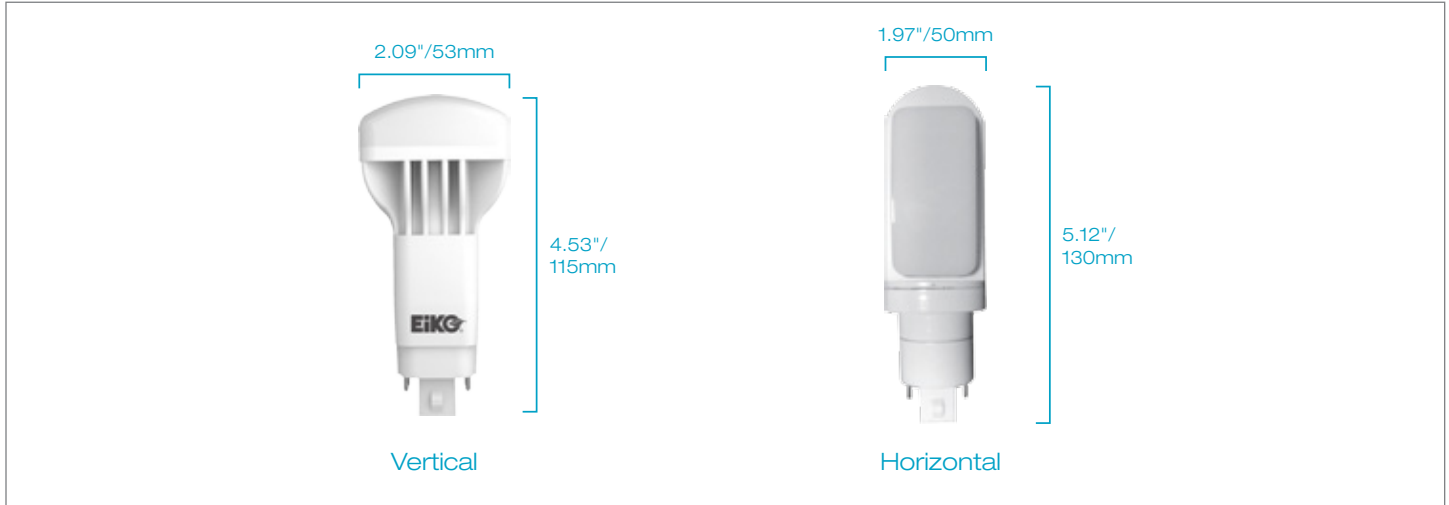

## ordering information

Order Code	Litespan Part #	Watts	Lumens	CCT	CRI	MOL	Orientation	Base	Life Hours	Replaces Fluorescent	
<b>08762</b>	<b>LED13W4PH/827DR-G5</b>	13W	900	2700K	83+	5.12"	Horizontal	G24q/GX24q	50,000	18-42W CFL	✘
<b>08763</b>	<b>LED13W4PH/830DR-G5</b>	13W	900	3000K	83+	5.12"	Horizontal	G24q/GX24q	50,000	18-42W CFL	✘
<b>08764</b>	<b>LED13W4PH/835DR-G5</b>	13W	900	3500K	83+	5.12"	Horizontal	G24q/GX24q	50,000	18-42W CFL	✘
<b>08765</b>	<b>LED13W4PH/840DR-G5</b>	13W	900	4000K	83+	5.12"	Horizontal	G24q/GX24q	50,000	18-42W CFL	✘
<b>08766</b>	<b>LED13W4PVL/827DR-G5</b>	13W	900	2700K	83+	4.53"	Vertical - Long	G24q/GX24q	50,000	18-42W CFL	✘
<b>08767</b>	<b>LED13W4PVL/830DR-G5</b>	13W	900	3000K	83+	4.53"	Vertical - Long	G24q/GX24q	50,000	18-42W CFL	✘
<b>08768</b>	<b>LED13W4PVL/835DR-G5</b>	13W	900	3500K	83+	4.53"	Vertical - Long	G24q/GX24q	50,000	18-42W CFL	✘
<b>08769</b>	<b>LED13W4PVL/840DR-G5</b>	13W	900	4000K	83+	4.53"	Vertical - Long	G24q/GX24q	50,000	18-42W CFL	✘

\*\* For use with G24q-2, GX24q-2, G24q-3, GX24q-3, G24q-4, and GX24q-4 4-pin double and triple sockets

✘ Lighting Design Lab Qualified

watch > like > follow



selection. solutions. simplicity. [eiko.com](http://eiko.com)

23220 W. 84<sup>th</sup> St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975  
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335