

# LED T5 Direct Fit Replacement Lamps

Electronic Ballast/Dimming/Battery Backup Compatible Glass Tubes



- 3,200 lumens
- 25 watts
- 128 lpw
- 50,000 hours

## features

- Directly replaces 54W T5HO fluorescent lamps
- T5HO fluorescent ballast compatible
- No socket changes; for use with non-shunted socketed fixtures
- Operates on most popular electronic programmed start fluorescent T5HO ballasts
- No rewiring or modifications of any kind required
- Choice of 4000K or 5000K CCT
- Frosted glass lens reduces visual glare
- Environment-friendly, no mercury or lead
- 5 year product warranty
- Suitable for use in totally enclosed fixtures



## performance

- 3,200 lumens @ 25W lamp
- 80+ CRI
- Beam Angle: 185°
- THD: <20%
- Power Factor: 0.98
- Rated Lifetime: 50,000 hours @ L70
- Suitable for damp locations
- Suitable for use in fixtures where ambient temperature is between -4°F (-20°C) and 113°F (45°C)
- Can be operated on dimmable fluorescent ballasts
- Can be operated on a fluorescent battery backup
- Does not operate on magnetic ballasts
- Does not operate on T8 or T12 ballasts
- Refer to ballast compatibility checklist to confirm lamp/ballast system operability

## applications

- Highbays
- Troffers
- Industrial Strips
- Cove Lighting
- Vapor Tights
- Warehouses
- Stairwells
- Cold Storage




# LED T5 Direct Fit Replacement Lamps

Electronic Ballast/Dimming/Battery Backup Compatible Glass Tubes

## ordering information

Order Code	Item #	Length	Lm	Lamp W	System W	V (Ballast Dependent)	CCT	CRI	Glass Tube	Bm	Life/ Hrs
<b>19475</b>	LED32T5HO/46/835-G6DR	46"	3,200	25	28	120-277V, 347V	3500K	80+	Frosted	185°	50,000
<b>09178</b>	LED32T5HO/46/840-G6DR	46"	3,200	25	28	120-277V, 347V	4000K	80+	Frosted	185°	50,000
<b>09179</b>	LED32T5HO/46/850-G6DR	46"	3,200	25	28	120-277V, 347V	5000K	80+	Frosted	185°	50,000

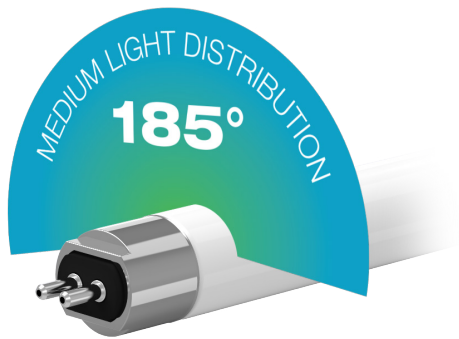

[watch](#) > [like](#) > [follow](#)

23220 W. 84<sup>th</sup> St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975  
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335