

SCSS : LED Surface Canopy Square



1C - 2C



3C - 4C

project name	type
catalog number	
comments	voltage
approved by	date

34-116
watts

2,976-
13,993
lumens

87+
lpw

70+
CRI

Features

- Shallow design housing combines contemporary aesthetics with LED performance
- Consumes 1/3 the energy and lasts 3x longer than comparable HID
- Solid die-cast aluminum construction
- Impact-resistant polycarbonate lens
- Unique quick mount design
- UV stabilized bronze powder coat finish
- Extremely low profile is ideal for confined spaces
- 5 year limited warranty

Performance

- SCSS-1C-U – 2,976 lumens @ 34W, 87lpw
- SCSS-2C-U – 5,524 lumens @ 58W, 95lpw
- SCSS-3C-50K-U – 11,176 lumens @ 88W, 127lpw
- SCSS-4C-50K-U – 13,993 lumens @ 116W, 122lpw
- Maximum ambient operating temperature 104°F (40°C)
- UL/cUL Listed for wet locations
- 5000K CCT
- CRI: >70
- Input voltage: 120~277V

Applications

- Strip malls
- Entryways
- Garages
- Plazas
- Utility Closets
- Public Restrooms
- Eaves

Ordering Information


Order Code	Item #	Lm	W	CCT	CRI	Life/Hrs	V	Finish	HID Equiv.	DLC
08787	SCSS-1C-U	2,976	34W	5000K	70+	50,000	120-277V	Bronze	50-175W	✓
09004	SCSS-2C-U	5,524	58W	5000K	70+	50,000	120-277V	Bronze	175-250W	✓
09448	SCSS-3C-50K-U	11,176	88W	5000K	70+	50,000	120-277V	Bronze	250-400W	✓
09449	SCSS-4C-50K-U	13,993	116W	5000K	70+	50,000	120-277V	Bronze	400W	✓

✓ DesignLights Consortium® Qualified



SCSS : LED Surface Canopy Square

Dimensions

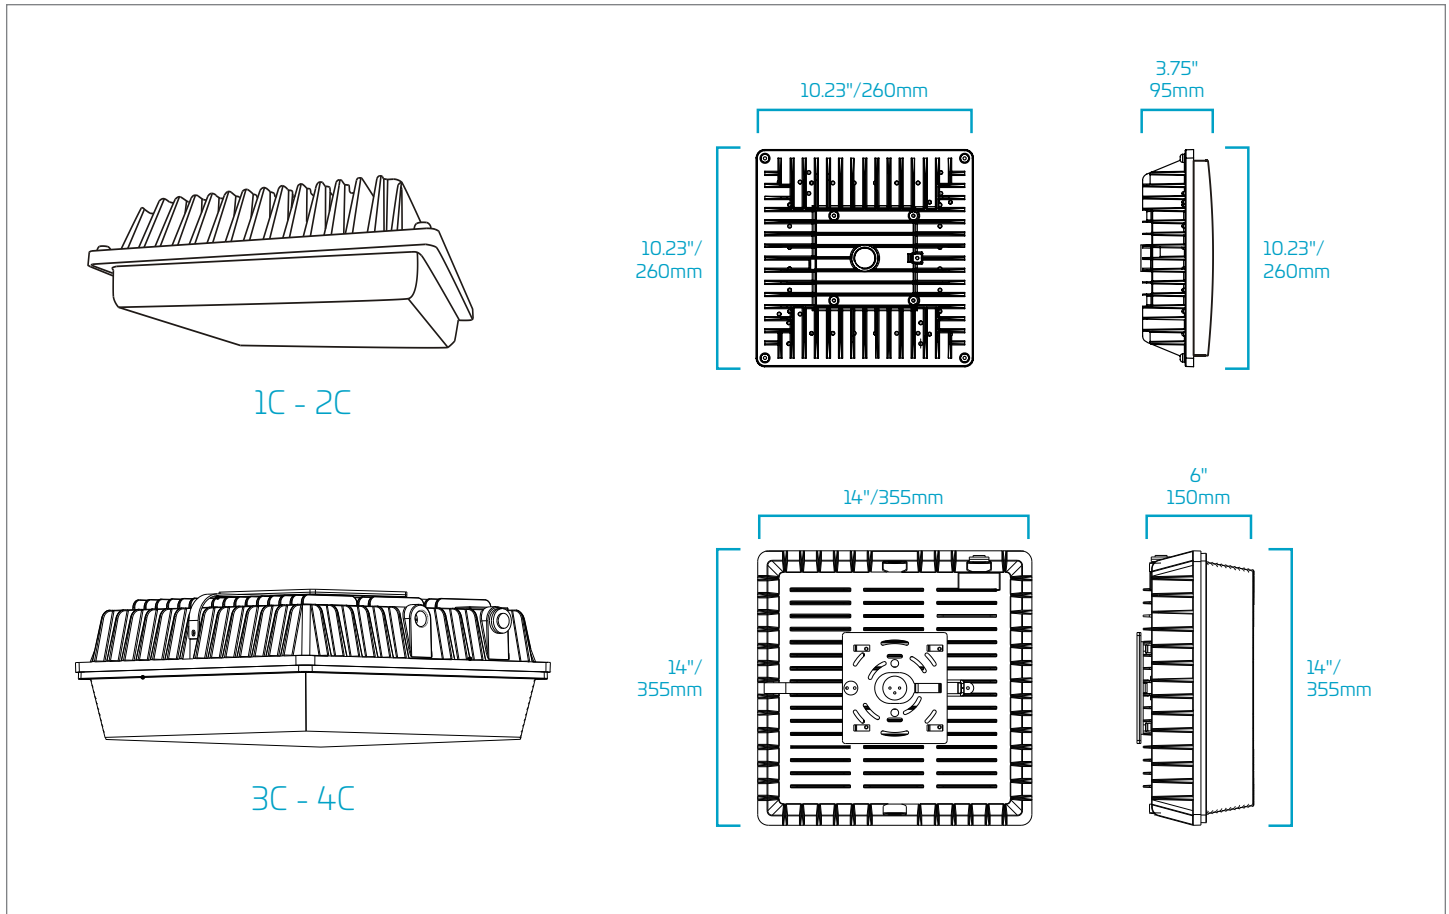

Accessories (Sold Separately)

Order Code	Litespan Part #	Description
09849	FHSCP-UNV-5WL	5W Emergency Battery Backup
09851	FHSCP-UNV-7.8WL	7.8W Emergency Battery Backup
09850	FHSCP-UNV-10.7WL	10.7W Emergency Battery Backup
09852	FHSCP-UNV-13.7WL	13.7W Emergency Battery Backup
09854	FHSCP-UNV-17WL	17W Emergency Battery Backup



watch > like > follow

