

ELT : LED Eco Lens Troffer



project name	type
catalog number	
comments	voltage
approved by	date

35/45
watts

3900-
5080
lumens

85+
lpw

4000K/
5000K
CCT

Features

- Dimmable
- Low-maintenance lighting installation
- Smooth hemmed sides & smooth inward ends for safe handling
- Lighter weight fixture for safe & easy installation
- Suitable for damp locations
- Acrylic prismatic lens standard, optional frosted lens is available as an adder
- Ultra-slim design - less than 2" depth ideal for shallow plenum installation

Performance

- 100,000 hour rated life
- Available in 4000K and 5000K
- CRI: >85
- Input Voltage: 120-277V

Applications

- Healthcare Facilities
- Educational Facilities
- Convenience Stores
- Offices

Ordering Information


Order Code	Item #	Size	Lm	W	CCT	CRI	Life/Hrs	V	Dimming	DLC
08975	ELT22D3540U	2x2	3,900	35W	4000K	85+	100,000	120-277V	1-10V	✓
09070	ELT22D3540UF	2x2	3,900	35W	4000K	85+	100,000	120-277V	1-10V	✓
08976	ELT22D3550U	2x2	3,900	35W	5000K	85+	100,000	120-277V	1-10V	✓
09071	ELT22D3550UF	2x2	3,900	35W	5000K	85+	100,000	120-277V	1-10V	✓
08977	ELT24D4540U	2x4	5,080	45W	4000K	85+	100,000	120-277V	1-10V	✓
09072	ELT24D4540UF	2x4	5,080	45W	4000K	85+	100,000	120-277V	1-10V	✓
08978	ELT24D4550U	2x4	5,080	45W	5000K	85+	100,000	120-277V	1-10V	✓
09076	ELT24D4550UF	2x4	5,080	45W	5000K	85+	100,000	120-277V	1-10V	✓

✓DesignLights Consortium® Qualified



ELT : LED Eco Lens Troffer

Dimensions

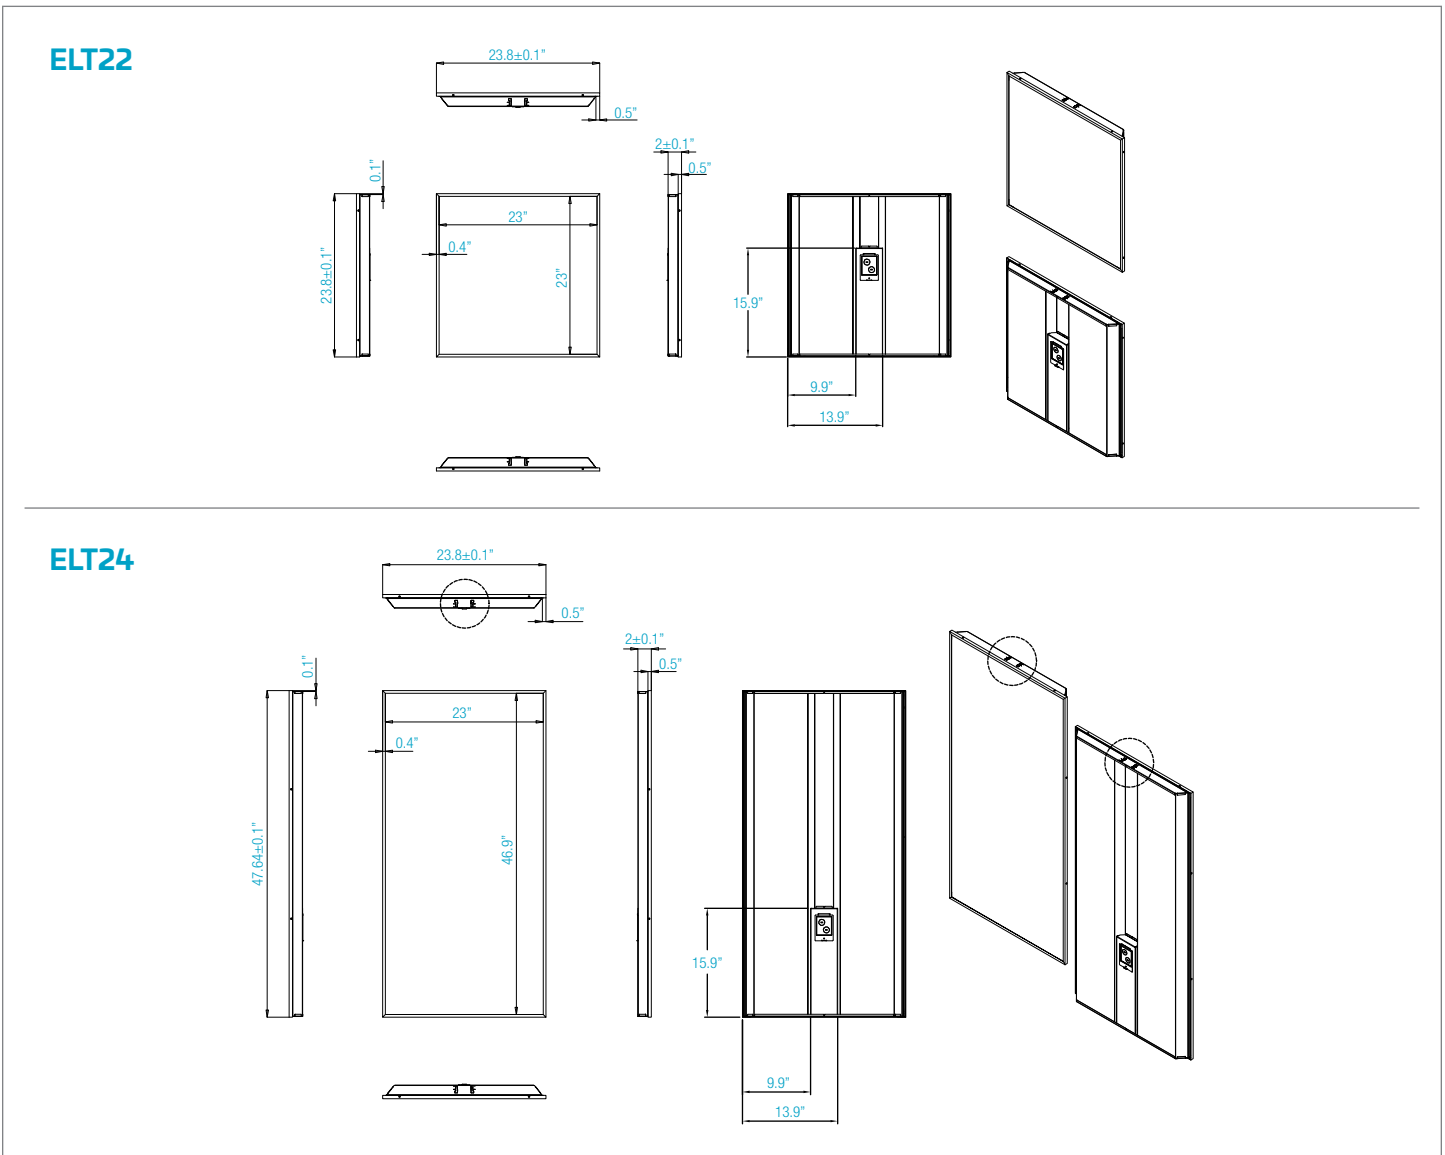

Accessories (Sold Separately)

Order Code	Litespan Part #	Description
09849	FHSCP-UNV-5WL	5W Emergency Battery Backup
09851	FHSCP-UNV-7.8WL	7.8W Emergency Battery Backup
09850	FHSCP-UNV-10.7WL	10.7W Emergency Battery Backup
09852	FHSCP-UNV-13.7WL	13.7W Emergency Battery Backup
09854	FHSCP-UNV-17WL	17W Emergency Battery Backup

watch > like > follow

