



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series L23

## LED Wall Mount, Surface or Pendant Mount Linear Fixture

A linear 2 x 3 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas, 2 x 3 Series fixtures can be installed individually or in a continuous run. Specially designed for direct/indirect lighting with snap in lens to hide the lamps or LED arrays. Ideal where downlight and uplight are required.

### CONSTRUCTION

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. Housing is specially designed for direct/indirect lighting with separating power source compartments for each.

### DIFFUSERS

Special LED formulated frosted lenses with snap in feature for easy access.

### TYPICAL OPTIONS & ACCESSORIES

Cord sets, whips, occupancy sensors, hanging kits, etc. Contact factory for more details.



### DIMENSIONS

- 2ft.-2"W x 24"L x 3"H
- 4ft.-2"W x 48"L x 3"H
- 8ft.-2"W x 96"L x 3"H

### FEATURES & BENEFITS

- Can be surface mounted to the ceiling or pendant hung by engineered hanging kit.
- Attractive source of direct or indirect lighting for use in offices, hallways, conference rooms and medical facilities
- Available in custom finish. Consult factory for details.
- Suitable for dry or damp location
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power Factor 0.99
- 100 lm/w
- 0-10V dimming or Triac dimming
- 5 year warranty.





Texas Fluorescents  
Reinvented

CATALOG# : \_\_\_\_\_

PROJECT : \_\_\_\_\_


TYPE : \_\_\_\_\_

# Series L23


LED Wall Mount, Surface or  
Pendant Mount Linear Fixture

## PENDANT MOUNT DRAWINGS AND DIMENSIONS


### 2 ft. - Back View

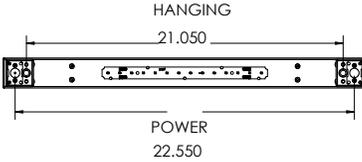


### 4 ft. - Back View

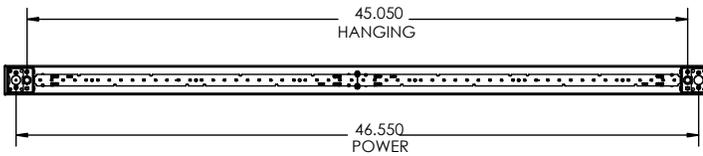

### 8 ft. - Back View

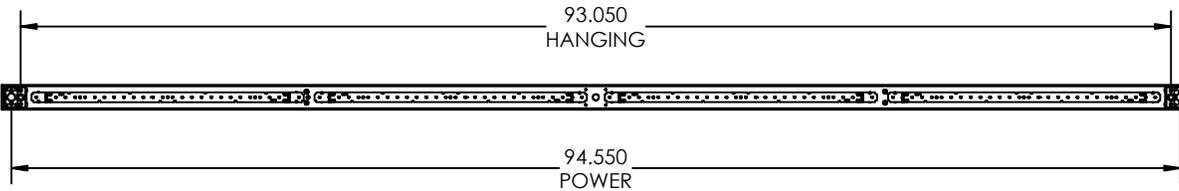


### End View

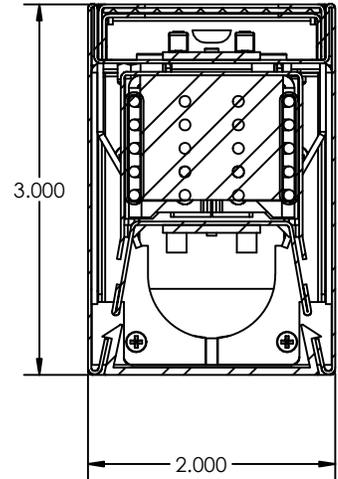


## SURFACE MOUNT DRAWINGS AND DIMENSIONS

### 4 ft. - Back View



### End View

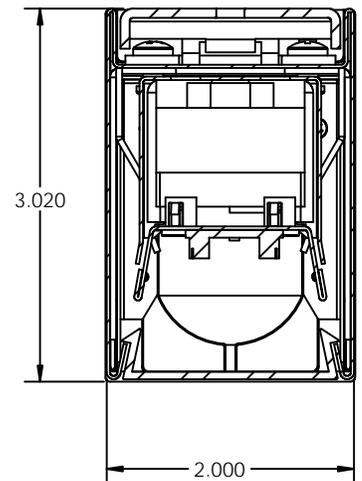


We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.


2055 Luna Road Suite 142 | Carrollton, TX 75006  
T 214.884.1150 | F 972.247.0200 | sales@saylite.com

### WALL MOUNT DRAWINGS & DIMENSIONS

4 ft. - Side

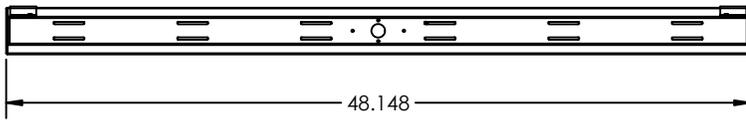

End View

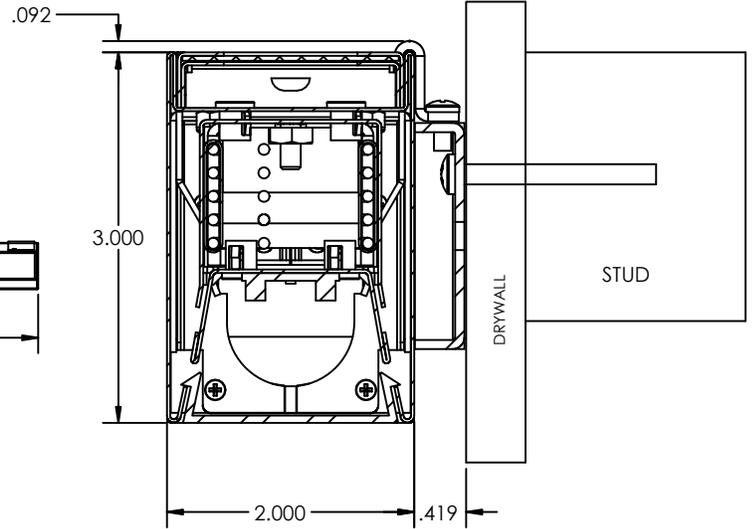

### PRODUCT NUMBERS

2 Ft.

SERIES	LENS MATERIAL	LENGTH	WATTAGE & LUMENS	DRIVER	COLOR
<b>L23W</b> Wall Mount <b>L23P</b> Pendant Mount	<b>SF</b> Snap-in frosted acrylic lens (85% transmission) Special for LEDs; only available for uplight and downlight	<b>24L</b> 24"	<b>Up and Down</b>  <b>UV6WDT12W</b> Uplight 6 Watts Downlight 12 Watts 1800 Lumens  <b>UV9WDT18W</b> Uplight 9 Watts Downlight 18 Watts 2700 Lumens	<b>DMV</b> 0-10V dimming <b>GMV</b> Triac dimming	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

FINISH	CONFIGURATION	OPTIONS
<b>WH</b> White <b>BK</b> Black <b>SI</b> Silver	<b>Blank</b> Individual	<b>HC605WH</b> Cable kit with 6' cable & 5 wires power feed/cable incl., clear cord and white canopy (included power feed and non-power feed)
	<b>-B</b> Beginner Run	<b>HC605WHNPF</b> Cable kit with 6' cable & white canopy, non power feed (non-power feed only)
	<b>-E</b> Ender Run	<b>HC612WH</b> Cable kit with 12' cable & 5 wires power feed/cable incl., clear cord and white canopy (included power feed and non-power feed)
	<b>-J</b> Joiner	<b>HC612WHNPF</b> Cable kit with 12' cable & white canopy, non power feed (non-power feed only)

Note:

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series L23

LED Wall Mount, Surface or  
Pendant Mount Linear Fixture

## PRODUCT NUMBERS 4 and 8Ft.

SERIES	LENS MATERIAL	LENGTH	WATTAGE & LUMENS	DRIVER	COLOR	
L23W Wall Mount L23P Pendant Mount	SF Snap-in frosted acrylic lens (85% transmission) Special for LEDs; only available for uplight and downlight	48L 48"	Up and Down	UV12WDT24W Uplight 12 Watts Downlight 24 Watts 3600 Lumens	DMV 0-10V dimming GMV Triac dimming	30K 3000K
				UV18WDT36W Uplight 18 Watts Downlight 36 Watts 5400 Lumens		35K 3500K 40K 4000K 50K 5000K
			Down Light Only	T26W2600L 26 Watts 2600 Lumens		
				T38W3800L 38 Watts 3800 Lumens		
				T45W4500L 45 Watts 4500 Lumens		
				* * *		
		96L 96"	Up and Down	UV24WDT48W Uplight 24 Watts Downlight 48 Watts 7200 Lumens		
				UV36WDT72W Uplight 36 Watts Downlight 72 Watts 10800 Lumens		
			Down Light Only	T52W4800L 52 Watts 5200 Lumens		
				T76W7600L 76 Watts 7600 Lumens		
				T90W9000L 90 Watts 9000 Lumens		
				* * *		

FINISH	CONFIGURATION	OPTIONS
WH White BK Black SI Silver	Blank Individual -B Beginner Run -E Ender Run -J Joiner	HC605WH Cable kit with 6' cable & 5 wires power feed/cable incl., clear cord and white canopy (included power feed and non-power feed) HC605WHNPF Cable kit with 6' cable & white canopy, non power feed (non-power feed only) HC612WH Cable kit with 12' cable & 5 wires power feed/cable incl., clear cord and white canopy (included power feed and non-power feed) HC612WHNPF Cable kit with 12' cable & white canopy, non power feed (non-power feed only)

PART NO.	DESCRIPTIONS
PI1	3 wires harness, including white, black and green
PI2	4 wires harness, including white, black, green and blue for emergency battery backup
PI3D	5 wires harness, including white, black, green, violet and gray

Note:

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.