

FEATURES & SPECIFICATIONS

INTENDED USE

Full body micro silhouette makes a bold statement with a minimal design in r quv r clpvgf 'kp'r qy f gt"eqcvgf 'hrcv'y j kg'r qn[gvgt finish (consult factory for other finishes). Scaled to the LED module the matte white diffuser surrounds the LEDs for soft lighting. Fixture can be pendant mounted with specially engineering cable mounting kit.

SIZE H x W x L in inches

- 3"H x 2.50"W x 48"L

MATERIALS & FEATURES

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Easy installation
- Available with smooth frosted lens

Series L25

LED Linear Pendant Mounted Strip



MOUNTING

Horizontal pendant mount.

ORDERING INFORMATION



Example: **L25PSF48LT37W3770LDMV40KWH**

| L25 | SF | 48L | T37W3770L | DMV | 40K | WH | HC3015WWH |
|---|----|-------------------|---|--|--|--|-----------|
| Series | | Length | Wattage and Lumen | | Color Temperature | Finish | |
| L25P LED Linear Pendant Mounted Strip | | 48L 48.00" | T37W3770L 37 System Watts, 3770 Delivered Lumens | | 30K 3000K 35K 3500K 40K 4000K 50K 5000K | WH White (standard) Option: BK Black RD Red BL Blue GR Green | |
| Lens | | | | Driver | | | |
| SF Snap in Frosted Lens | | | | DMV 0-10V Dimming | | | |
| Options | | | | | | | |
| | | HC3015WWH | | Cable kit with 4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy | | | |
| | | HC3025WWH | | Cable kit with 12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy | | | |
| | | 2SCS24WH | | Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture | | | |

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

BOTTOM VIEW

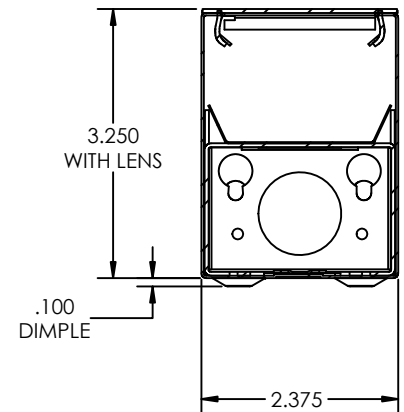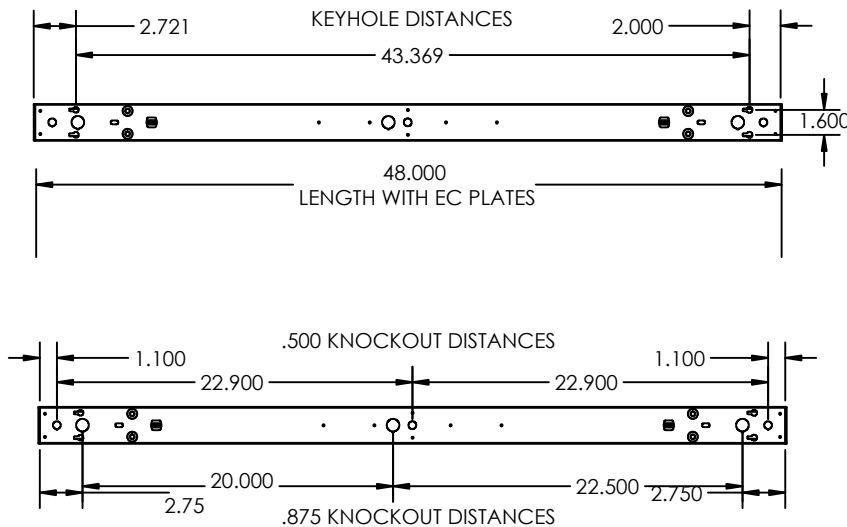

END VIEW