

L44IR LED

Pendant/Surface/Recessed Mount LED Indirect Radiant Linear Fixture

JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The linear L44IR LED linear fixture is for distinctive architectural lighting plans. Ideal for hotels, apartments, corridors, lobbies and office areas. The L44IR series fixtures can be installed individually or in group patterns.

FEATURES & BENEFITS

- Fixtures can be surface mounted, recessed mounted or pendant hung by stem or cable
- Housing is die-formed and welded 22-gauge cold-rolled steel
- Exterior-accessible 1/4-20 holes allow for fast and easy pendant mounting with no need to open the fixture
- Option to continuous row mount is standard by removing end plates

24,000

18.263 Surface Mount Obrounds 21.000 1/4-20 Hanging Mounts

• ∘ →

Ć

5.369


.875 KO

- Every fixture is individually tested
- ETL_{us} listed for damp location

DIMENSIONS


24 Inch

4.021



48 Inch

0

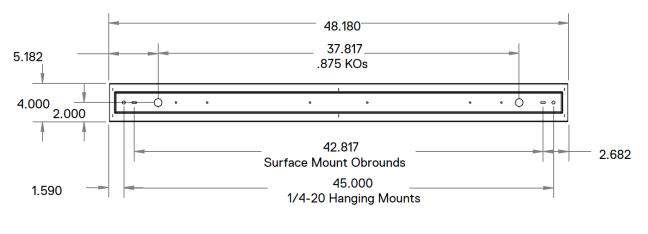



Dimensions and specifications subject to change without notice.



L44IR LED Pendant/Surface/Recessed Mount LED Indirect Radiant Linear Fixture


JOB NAME:

CAT#:

TYPE:

DIMENSIONS

96 Inch

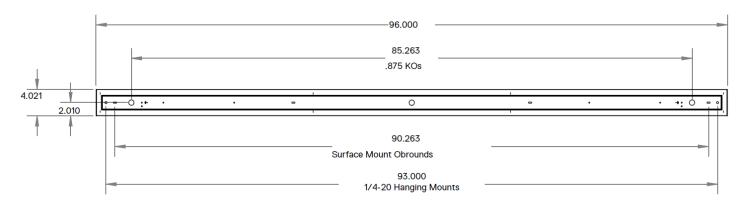

ORDERING

EXAMPLE: L44IR R 48 LED 25 DMV WH 30 HC421WH PI1

LED

1. SERIES		2. MOUNTING	3. LENGTH	4. GEAR	5.	5. WATTAGE/LUMENS		6. DRIVER		7. FINISH		
L44IR	LED Indirect Radiant Linear Fixture	 R Recessed Flanged R Recessed Flangeless Appearance W Wall Mount S Surface P Pendant 	e	LED	25 50 100	25W 50W	24 in. 2000 Lumens 48 in. 4000 Lumens 96 in. V 8000 Lumens	DMV SDMV	120-277V Multivolt 0-10V Dimmable Step dimn Multivolt		WH SL BK	White Silver Black
3. COLOR TEMP		9. HANGING KIT(O) ¹				10. PLUG IN(O) ¹			11. CONFIGURATION			
30 35 40 50	3000K 3500K 4000K 5000K	HC421WH HC421WH5W HC422WH HC422WH5W	Cable kit w/ 6' cable & 3 wire power feed cable incl. w/ white canopy Cable kit w/ 6' cable & 5 wire power feed cable incl. w/ white canopy Cable kit w/ 12' cable & 3 wire power feed cable incl.w/ white canopy Cable kit w/ 12' cable & 5 wire power feed cable incl. w/ white canopy		PI1 PI2 PI3D	3 wire harness, including white, black and green 4 wire harness, including white, black, green and blue for emergency backup 5 wire harness, including white, black, green, violet and gray			BLANH -B -E -J	c	Individual Beginner Run Ender Run Joiner	
NOTES:	:											
O is opti	onal								a			

Dimensions and specifications subject to change without notice.

