

JOB NAME:
CAT#:
TYPE:

APPLICATIONS


The linear 4x5 LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x5 Series fixtures can be installed individually or in group patterns.

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity.

FEATURES & BENEFITS

- Fixtures can be surface mounted, pendant recessed or cable
- Accepts various lenses or louvers
- 8' units have a steel mullion to join two individual diffusers
- Optional welded light-leak flanges are available on ends
- Every fixture is individually tested
- Min CRI 82
- ETL listed for damp location

DIMENSIONS

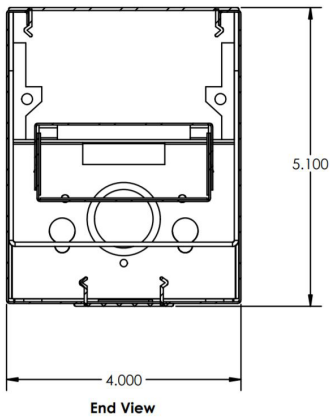
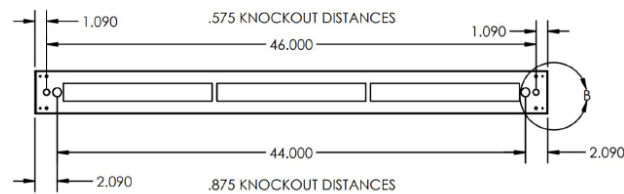
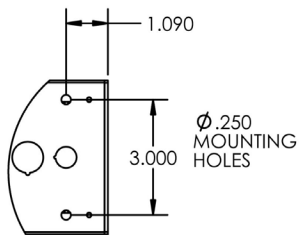
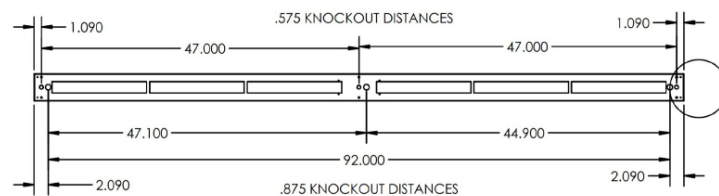


FROSTED LENS
 (acrylic snap-in lens)
 Frosted: 85% efficient
SF Frosted Lens

Uplight and Downlight View



Continuous Run End View


48L Drawing

96L Drawing


Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: L45 W 48 LED 1U2D 36 DMV WH MW 30 H4W EM P11

L45

LED

1. SERIES	2. MOUNTING	3. SIZE	4. GEAR	5. DISTRIBUTION	6. WATTAGE/LUMENS	7. DRIVER	
L45 Direct Indirect	W Wall Mount	48 48"	LED	1U2D Up and Downlight	4 ft.		DMV 120-277V Multivolt 0-10V Dimmable
	P Pendant Mount	96 96"			36 36W 1200U-2400D	54 54W 1800U-3600D	
			72 72W 2400U-4800D	72 72W 2400U-4800D			
			108 108W 3600U-7200D	108 108W 3600U-7200D			

8. FINISH	9. LENS OPTIONS	10. COLOR TEMP	11. REFLECTOR(O) ¹	12. CABLE KIT(O) ¹
WH Matte White	MW Matte White .100 thick lens (std.)	30 3000K	Blank Standard	H4W HC301 Cable kit with 4 cable + power feed cable incl. with white canopy
SL Silver	S.5 Specular Parabolic Louver (1/2"x 1/2" x 3/8")	35 3500K	WW Wall Wash	H4W5 HC301 Cable kit with 4' cable + power feed 0-10V dimming cable included with white canopy (5 wire)
BK Black	SF Snap-in Frosted Lens	40 4000K		H4W6 HC301 Cable kit with 4' cable + power feed 0-10V dimming and EM cable incl. w/ white canopy (6 wire) (check local codes)
BZ Bronze	LV Baffled Louver	50 5000K		H12W HC302 Cable kit with 12' cable + power feed cable incl. with white canopy
IN Iron				H12W5 HC302 Cable kit with 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire)

13. EM(O) ¹	14. PLUG IN(O) ¹	15. CONFIGURATION
EM Emergency Battery Pack 10W ~ 1700 lumens	P11 3 wire harness, including white, black and green	BLANK Individual
EM7 Emergency Battery Pack 7W ~ 1300 Lumens	P12 4 wire harness, including white, black, green and blue for emergency backup	-B Beginner Run
EM5 Emergency Battery Pack 5W ~ 850 Lumens	P13D 5 wire harness, including white, black, green, violet and gray	-E Ender Run
		-J Joiner

NOTES:

¹O is optional

NOTES

Custom louvers available in any color. * 4 ft. available but not available in 1000mm.
Consult factory for additional information.
* 4 ft. available but not available in 1000mm.



Dimensions and specifications subject to change without notice.