



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

Full body micro silhouette makes a bold statement with a minimal design in post painted matte white finish (consult factory for other finishes). Scaled to the LED module the frosted diffuser surrounds the LEDs for a soft lighting. Fixture can be surface mounted on the wall or ceiling or pendant mounted with specially engineered cable mounting kit.


### FEATURES & BENEFITS

- Housing is formed and welded 22 gauge steel, that is chemically treated and powder coated for a beautiful finish and to resist corrosion
- Can be mounted individually or in a continuous row
- Ribbed frosted lens is standard
- Knockouts on back and ends accept standard electrical fittings (by others). Consult factory.
- Surface mountable to a wall or ceiling
- Pendant or cable mountable
- Whips, fuses and cord sets. See options page in Buyers' Guide or contact the factory for more.
- cETL<sub>US</sub> listed for damp locations



### DIMENSIONS

- 3.93”H x 3.79”W x 23.60”L
- 3.93”H x 3.79”W x 47.20”L
- 3.93”H x 3.79”W x 94.40”L

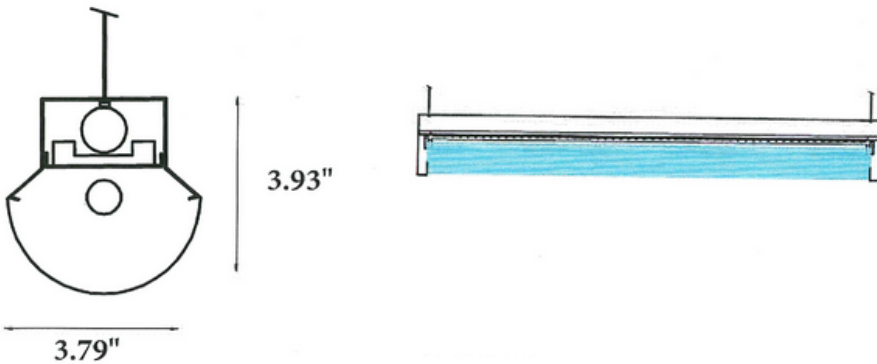

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: LDA 24 LED 12 DMV WH RF 30 EM OS H4W

LDA		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. FINISH	7. LENS			
LDA	24	23.6"	<b>LED</b>						
	48	47.2"	<b>24 Only</b>	<b>DMV</b>	120-277V Multivolt 0-10V Dimmable	<b>WH</b>	White (std)	<b>RF</b>	Ribbed Frosted
	96	94.4"	<b>12</b>	12 Watts 1200 Lumens	<b>SDMV</b>	Step dimming Multivolt	<b>BK</b>	Black	
			<b>15</b>	15 Watts 1500 Lumens	<b>DHV</b>	347-480VAC 0-10V Dimming	<b>SL</b>	Silver	
			<b>20</b>	20 Watts 2000 Lumens	<b>D347V</b>	347VAC 0-10V Dimming	<b>RD</b>	Red	
			<b>24</b>	24 Watts 2400 Lumens	<b>D120</b>	Triac Dimming 120VAC	<b>BN</b>	Brushed Nickel	
			<b>30</b>	30 Watts 3000 Lumens	<b>D277</b>	Triac Dimming 277VAC			
			<b>40</b>	40 Watts 4000 Lumens					
			<b>48</b>	48 Watts 4800 Lumens					
			<b>60</b>	60 Watts 6000 Lumens					
		<b>80</b>	80 Watts 8000 Lumens						
8. COLOR TEMP	9. EMERGENCY(O) <sup>1</sup>		10. SENSOR(O) <sup>1</sup>		11. HANGING KIT(O) <sup>1</sup>		12. PLUG IN OPTIONS(O) <sup>1</sup>		
<b>30</b>	3000K	<b>EM</b>	Emergency battery pack 10W~1300 Lumens (4ft. 8ft. only)	<b>OS</b>	Occupancy Sensor	<b>H4W</b>	HC301 Cable kit with 4' cable & power feed Cable incl. w/ white canopy and cord	<b>PI1</b>	3 wire harness, including white, black and green
<b>35</b>	3500K			<b>SSM</b>	Integral Microwave Sensor	<b>H4W5</b>	HC301 Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy and cord (5 wire)	<b>PI2</b>	4 wire harness, including white, black, green and blue for emergency backup
<b>40</b>	4000K					<b>H12W</b>	HC302 Cable kit with 12' cable & power feed Cable incl. w/ white canopy and cord	<b>PI3D</b>	5 wire harness, including white, black, green, violet and gray
<b>50</b>	5000K					<b>H12W5</b>	HC302 Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy and cord (5 wire)		

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

**ACCESSORIES**

Lumens are subject to a tolerance of ±10% and not relevant to RGB  
Input wattage can vary depending on options  
Dimensions and specifications subject to change without notice.

**NOTES:**

<sup>1</sup>O is optional

Dimensions and specifications subject to change without notice.

