


# LED Disk Light

## DIMENSIONS

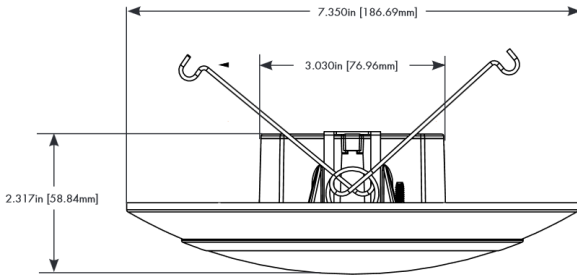

## APPLICATION

The LDL2 Series LED disk light provides versatile lighting on standard line voltage, yet produces the high energy savings you desire from LED fixtures. The LDL2 series allows for easy upgrade your down-lighting from the traditional recessed cans to a more modern looking, energy efficient solution. This disk light can be easily mounted onto a junction box or can be retrofitted into an existing recessed can with the optional hardware mounting adapter (not included).

## FEATURES

- High-transmission (White) Acrylic lens with excellent distribution and uniformity.
- Full distribution LED Luminaire
- 120V AC with Driver on Board Technology. 10-100% triac dimming, compatible with most triac dimming switches in the market
- Can be retrofit into most 5" or 6" recessed down-lights or surface mounted for new construction applications
- Designed for a 50,000 Hour Life
- Available in 3000K or 4000K Kelvin temperatures
- Environmentally friendly - contains no mercury or other hazardous

## HOUSING

Aluminium spun reflection with diffusion lens for official visual comfort while providing optional light output

## MOUNTING

Designed for mounting on 4" electrical

## ELECTRICAL

Equipped standard with 120V 15-100% triac dimming driver.

## LISTING

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Adheres to LM70, LM80, and TM21 industry standards.

## WARRANTY

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

## QUICK SHIP

LDL2-6-13-120D-930-WH  
LDL2-6-13-120D-930-ORB  
LDL2-6-13-120D-930-NS

## ORDERING INFORMATION

Example Model Number: LDL2-6-13-120D-930-WH

SERIES	DIAMETER	WATTAGE	DRIVER TYPE	COLOR TEMPERATURE	FINISH
LDL2	4-4" <sup>1 2</sup> 6-6" <sup>2</sup> 9-9" <sup>1</sup>	4" Housing 10- 10W (750 Lumens) <sup>1 2</sup> 6" Housing 13-13W (1000 Lumens) <sup>2</sup>	120D- 120V, Triac Dimming 277D- 277V <sup>1</sup>	930-90 CRI; 3000 Kelvin <sup>2</sup> 940-90 CRI; 4000 Kelvin <sup>1 2</sup>	NS- Nickel Satin ORB-Oil Rubbed Bronze WH- White

Notes:

<sup>1</sup>Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

<sup>2</sup>Energy star listed