

LDSXL SERIES

Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LDSXL-MCT-DD-ORB




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

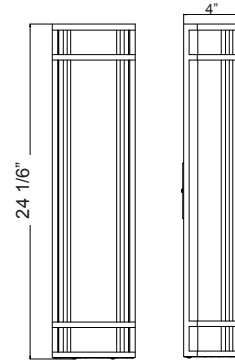

24 1/6"(H) x 6"(W) x 4"(D)

Wall sconce fixture updated with the latest in LED technology. It provides accent illumination that visually expands the space and creates a relaxing atmosphere. Ideal for use in hallways, stairways, dining areas, foyers, and meeting rooms for residential and commercial applications. The long LED life, coupled with exceptional color rendering, make this fixture attractive for new or retrofit projects.

Features

- High-Transmission Frosted Plastic Lens with Excellent Distribution and Uniformity
- Direct replacement for Fluorescent
- Full distribution LED luminaries
- 70,000 Hours Rated Life
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120V
- Wattage: 25W
- Power factor: >0.9
- Efficacy: 72 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish
- High-Transmission Frosted Plastic Lens with Excellent Distribution and Uniformity
- Direct replacement for Fluorescent
- Full distribution LED luminaries
- IP Rating: IP65
- Operating Temperature: -4°F to 113°F
- Suitable for Wet Locations

Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Multi CCT: Selectable CCTs Switch located on the LED Board
- Total Lumens: 1800LM
- Color Temperature: 3000K/ 4000K/ 5000K
- Color Rendering Index: ≥ 80
- Beam Angle: 120°

Applications:

- Motel, Hotels, Hospitals, hallways, stairways, dining areas, foyers, and meeting rooms

Other Models:



- 25W | 1800LM | LDSXL-MCT-DD-SIL




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




Photometrics: LDSXL-MCT-DD-ORB



BUG Rating: B1-U3-G1

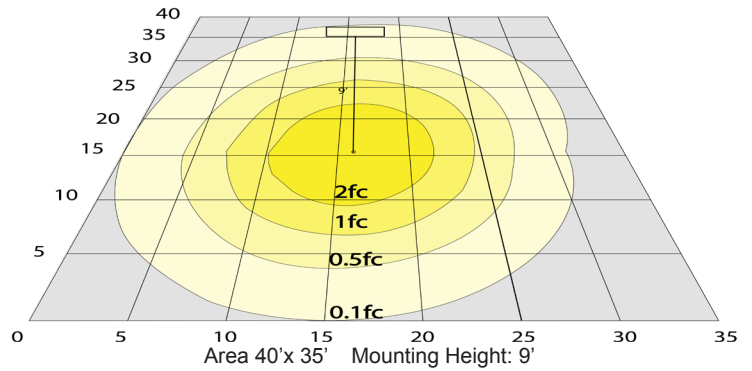

Other Views:



Bottom View



Front View



Back View

Performance Table: LDSXL-MCT-DD-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LDSXL-MCT-DD-ORB	25W	120V	1800LM	3000K 4000K 5000K	B1-U3-G1	75

Sample Ordering

Model Color Temp. Dimming Housing

LDSXL - MCT - DD - ORB

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-LDSL = EMERGENCY BATTERY BACKUP OPTION

OPT-PC-B1 = BUTTON-TYPE PHOTOCELL

OPT-SEN-LDS-GY = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

WEC-8RC = OPTIONAL REMOTE CONTROL

FACTORY-INSTALLED OPTION:



OPT-EM-LDSL
EMERGENCY BATTERY BACKUP OPTION



OPT-SEN-LDS-BR
PROGRAMMABLE MICROWAVE
BI-LEVEL SENSOR



WEC-8RC
OPTIONAL REMOTE CONTROL



OPT-PC-B1
BUTTON-TYPE PHOTOCELL

Example:

1 LDSXL-MCT-D-ORB

(For LDSXL 25W MCT fixture 120-277V)

2.LDSXL-MCT-D-ORB
WEC-8RC

(For LDSXL 25W MCT fixture 120-277V)
(OPTIONAL REMOTE CONTROL)

