

LEDMPAL15 15 Watt Multi-Purpose LED Area Light



Project:	
Type:	
Catalog #:	

STANDARD



The LEDMPAL series is a group of architectural LED area luminaires designed to illuminate parking areas, pathways, building facades, loading docks, and a wide variety of other large, general site lighting applications. Multiple mounting options make the LEDMPAL a versatile luminaire for flood lighting, pole-, ground- and wall-mounted area lighting, and other outdoor lighting requirements.

FEATURES

- Available in 3000k (warm white), 4000K (neutral white) and 5000K (cool white).*
- Long-life LEDs provide 69,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- Delivers 1,570 lumens & 103 lumens per watt (LPW) at 3000k; 1,615 lumens and 111 LPW at 4000k; and 1,663 lumens & 115 LPW at 5000k.*
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Die cast aluminum housing with durable, dark bronze powder coat finish, and a heat-resistant polycarbonate lens.
- Wireway enclosure is sealed with a water-tight, silicon rubber gasket.
- Effective projected areas (EPA's) are:
 - Front = 0.05 square feet
 - Side = 0.04 square feet
 - Face = 0.12 square feet
- Easy installation in new construction or retrofit applications.

* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.



Yoke-Mount Option



Knuckle-Mount Option


WARRANTY & LISTINGS

- cULus listed for wet locations (-30°C to 40°C / -22°F to 104°F)
- IP65 rated.
- DLC standard approved.
- Complies with FCC Part 15, Class B.
- Complies with EN61000-4-5, surge immunity (1kV).
- 5-year warranty on all electronics and housing.

MOUNTING OPTIONS

- Yoke-mount option provides secure attachment to flat surfaces.
- Aluminum die-cast knuckle-mount option is installed on a junction box. Includes 1/2" NPS stem with locking nut.

DIMENSIONS

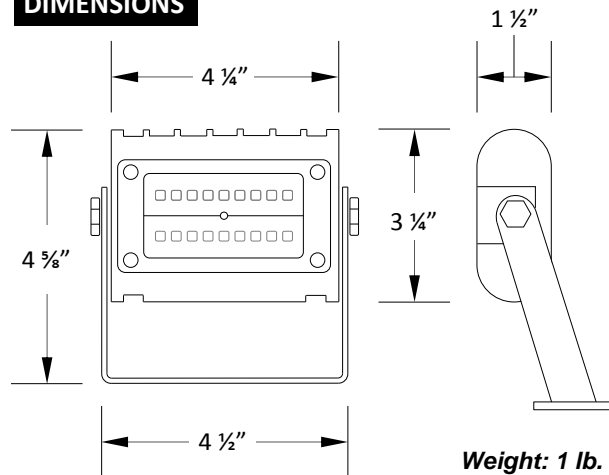

Weight: 1 lb.

ORDERING INFORMATION

Example: LEDMPAL15-Y-3K

Model	Luminaire Watts	Luminaire Lumens	Lumens / Watt	Mounting Options	Color Temperature
LEDMPAL15	15	1,570	103	Y = Yoke Mount	3K = 3000k
		1,615	111	K = Knuckle Mount	4K = 4000k
		1,663	115		5K = 5000k

LEDMPAL15 15 Watt Multi-Purpose LED Area Light



ELECTRICAL DATA

Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage ²	Input Current (A)			Power Factor	THD ³	L ₇₀ Hours ⁴
							120V	240V	277V			
LEDMPAL15-3K	3000k	> 80	1,570	15	103	120-277	0.13	0.06	0.05	> 90%	< 20%	69,000
LEDMPAL15-4K	4000k	> 80	1,615	15	111	120-277	0.13	0.06	0.05	> 90%	< 20%	69,000
LEDMPAL15-5K	5000k	> 80	1,663	15	115	120-277	0.13	0.06	0.05	> 90%	< 20%	69,000

¹ Color rendering index.


² All 50-60Hz.

³ Total harmonic distortion.

⁴ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

LEDMPAL15-5K (1,663 Lumens, Type V Distribution)

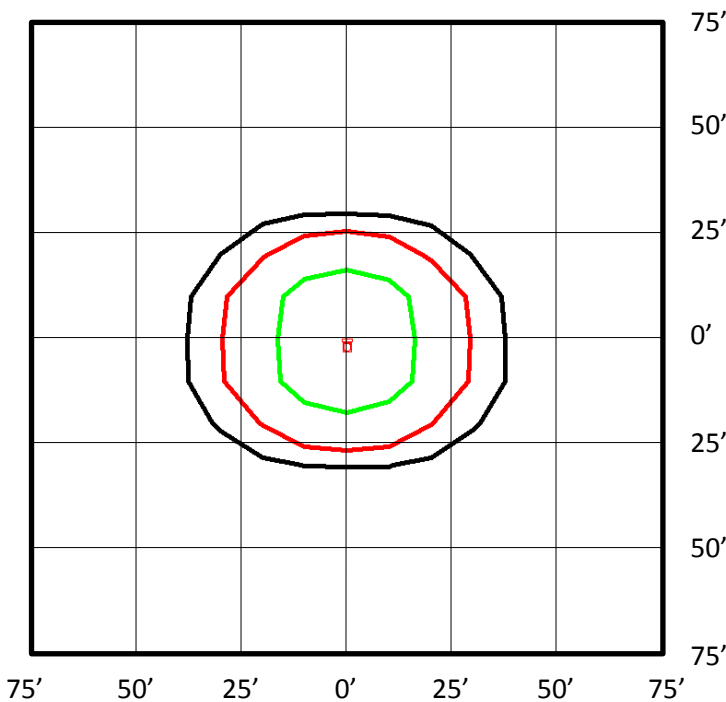

BUG Rating: B1-U1-G0

Zone	Lumens	%
FL - Front - Low (0-30)	260	16%
FM - Front - Medium (30-60)	501	30%
FH - Front - High (60-80)	94	6%
FVH - Front - Very High (80-90)	6	0%
Total Forward Light	860	52%
BL - Back - Low (0-30)	253	15%
BM - Back - Medium (30-60)	458	28%
BH - Back - High (60-80)	86	5%
BVH - Back - Very High (80-90)	5	0%
Total Back Light	802	48%
UL - Up Light - Low (90-100)	0	0%
UH - Up Light - High (100-180)	1	0%
Total Up Light	1	0%
Total Lumens	1,663	100%

Foot Candles

- 5.0
- 2.0
- 1.0
- 0.5
- 0.2
- 0.1

Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.