

LED
TECHNOLOGY

50,000 Hours Life, 50 Watt, 120-277VAC 60Hz

Applications:

Parking Lots, Wall Wash, Security Lighting, Land Lighting



Features:

- 120/277 Dual Voltages
- Aluminum Rust Proof Body
- Instant Start Electronic Unit
- Suitable For Wet Location(IP65)
- Water Tight Wire Connector Included
- Knuckle Mount Base, Standard 1/2" IPS Thread Size




Specification:

Input Line Voltage: 120-277VAC
 Input Power: 50W
 Input Line Frequency: 60Hz
 Lamp Life (Rated): 50,000hrs
 Minimum Starting Temp: -20°C/-4°F
 Maximum Operating Temp: 40°C/104°F
 CCT: 3000K/5000K
 CRI: ≥70
 Lumens: 5750/5750
 CBCP: 2198
LED: LM-80 Certified High Performance Seoul LED Chips

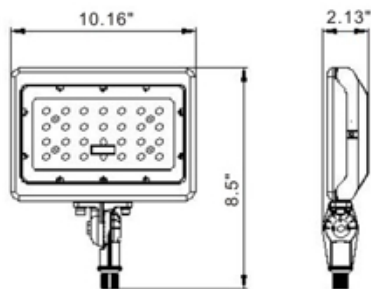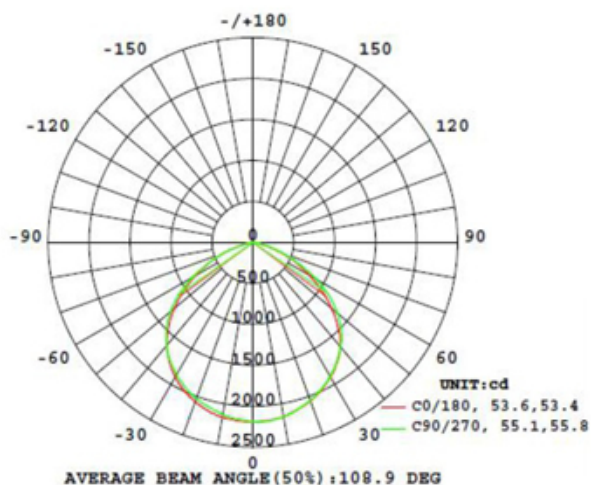

Weight: 3.62 LB

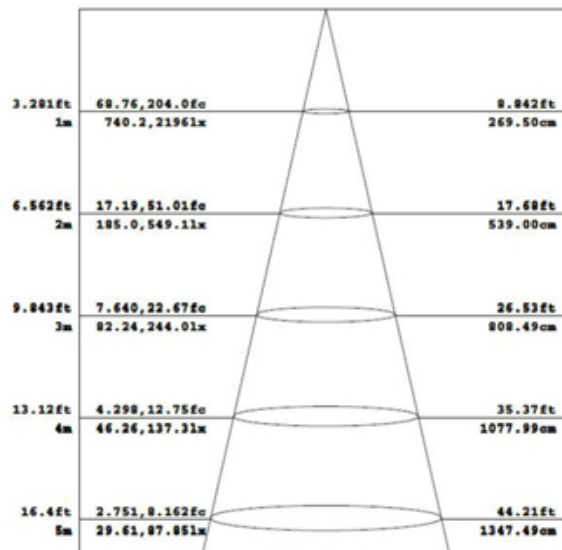

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Life Hours
50,000

Model:#	Description	wattage	lumens
LF50BZ/WW	50Watt Hard WireLED Flood Light Bronze Color, 3000K Warm White	50W	5750
LF50BZ/DL	50Watt Hard WireLED Flood Light Bronze Color, 5000K Day Light	50W	5750

* 5 Year Limited Warranty

UPC: LB50BZ/WW 793573-749741
 LB50BZ/DL 793573-749130

