


Shelf Lighting LINCUS



Shelf Lighting LINCUS




Shelf Lighting LINCUS




- Plug & play (External power supply)
- Wide beam angle
- Bright and consistent illuminance for display area
- Dark spot free at the linking point
- Linkable, max. linkable length: 10' per run
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy
- 3W/ft, 240lm/ft(@4000K)



Dimensions: (inches/mm)

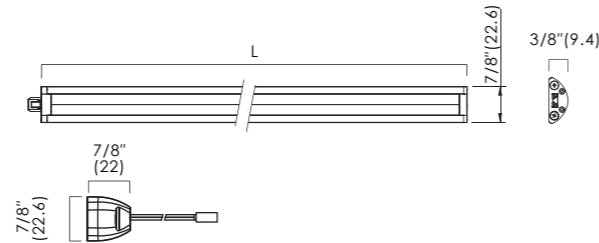

Wiring Diagram



Vertical & Horizontal Beamwidth

Center Beam FC

	90°	LINCUS-L12-24V-1		LINCUS-L18-24V-1		LINCUS-L24-24V-1	
		3000K	4000K	3000K	4000K	3000K	4000K
12"	16-13/16"	90	90	121	121	143	143
18"	25-3/16"	44	44	62	62	80	80
24"	33-5/8"	25	25	37	37	47	47
30"	42"	17	17	24	24	32	32
H	D	224 lm	224 lm	336 lm	336 lm	448 lm	448 lm

Shelf Lighting LINCUS

How to order using our catalog numbers:

Example: LINCUS-1130K90SC0

Series	Length	Color Temp	Beam Angle	Finish	Installation
LINCUS	11 - 10.4"(264.7mm) 17 - 16.4"(417.3mm) 23 - 22.4"(569.7mm)	30K - 3000K 40K - 4000K	90 - 90°	S - Silver	C0 - Mounting Clip 0°

Catalog No.	Model	Description				Included	Max. Pcs Per LED Power Supply		
		Rated Input	Ra	Wattage	Luminous Flux (TYP@4000K)		30W (NA159-3024 FA-4A6)	75W (NA159-7524 LA-12A6)	96W (NA383-9624D LA-DG6-12A6)
LINCUS-1130K90SC0	LINCUS-L12-24V-1	24VDC	85	2.8W	224lm	1pc LED fixture 2pcs Screws 2pcs Mounting clips 1pc End cap	10 pcs	24 pcs	30pcs
LINCUS-1140K90SC0									
LINCUS-1730K90SC0	LINCUS-L18-24V-1	24VDC	85	4.2W	336lm		6 pcs	16 pcs	20pcs
LINCUS-1740K90SC0									
LINCUS-2330K90SC0	LINCUS-L24-24V-1	24VDC	85	5.6W	448lm		5 pcs	12 pcs	15pcs
LINCUS-2340K90SC0									

*Note: 10' per run. Multiple runs not to exceed max. driver wattage.



How to choose your driver & cables:

Catalog No.	Description	Photo
IC-LC-59	Input cable 59" (must be between light and splitter)	
NA159-3024FA-4A6	Model: SLT30-24VF-A Matching driver, max. 30W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 4-way splitter JB-4A + 6" cable.	
NA159-7524LA-12A6	Model: SLT75-24VL-2A Matching driver, max. 75W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 12-way splitter JB-12A + 6" cable.	
NA383-9624DLA-DG6-12A6	Model: SLD96-24VC-UN1-A Matching 1-10V dimmable driver, max. 96W. Input: 120-250VAC NA3 plug + 83" cable. Output: 24VDC DG238 DEGSON connector + 6" cable + 12-way splitter JB-12A + 6" cable.	

*Note: For alternative driver configurations, please contact our sales department.


Shelf Lighting LINCUS

Optional:

Catalog No.	Description	Photo
SC-LC-2	Soft connector 2"	
SC-LC-12	Soft connector 12"	
MMC-LC	Magnetic mounting clips	

Installation

Non-magnetic surface installation

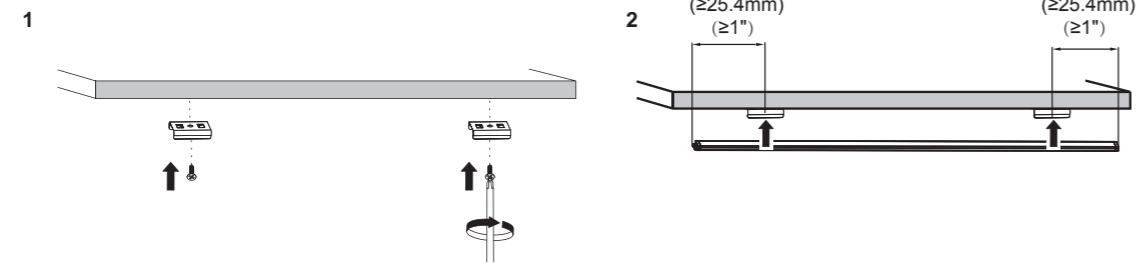

Magnetic surface installation

