



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Mobern introduces LED low profile rectilinear lighting that can be pendant, surface, or wall mounted individually. Ideal for general lighting applications in both commercial and residential applications for circulation spaces, high impact areas and kitchen islands and home offices. The versatility and clean styling makes this an ideal choice in many applications.




FEATURES & BENEFITS

- Available in surface, pendant, or wall mount
- Min CRI 80
- L70 ≥ 50,000 hrs.
- Pendant mount with 4' adjustable cable and power feed (2 for 4' unit or 8' unit)
- 5 year warranty

DIMENSIONS

Surface Mount

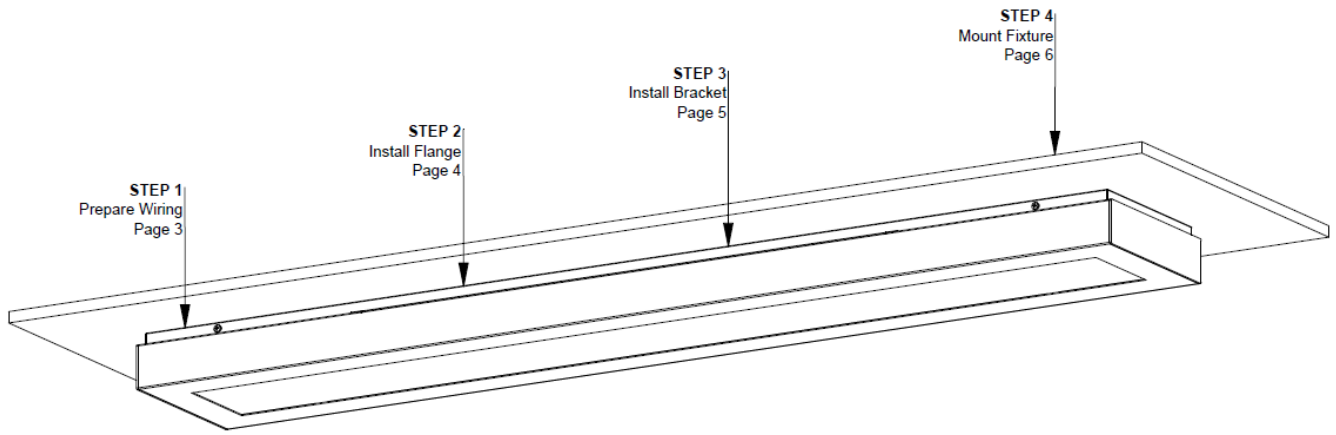

Dimensions and specifications subject to change without notice.





JOB NAME:



CAT#:

TYPE:


DIMENSIONS

Pendant Mount



BACK VIEW

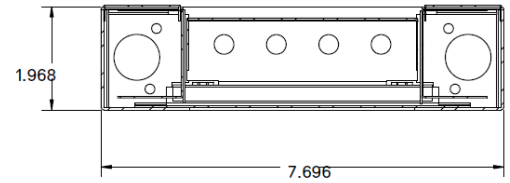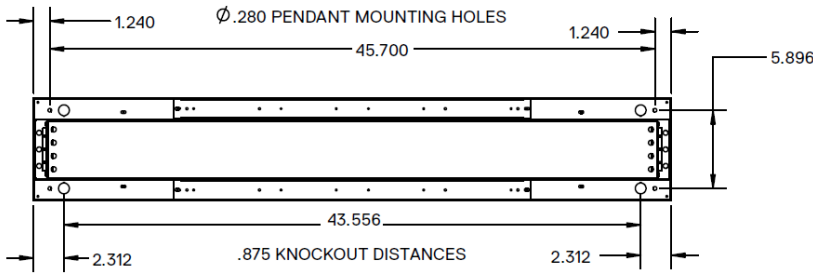


TOP

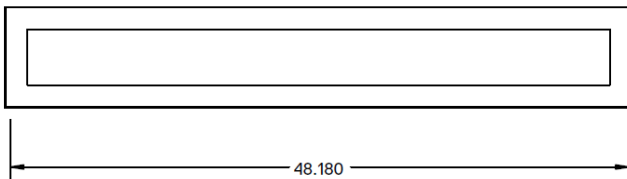

Wall Mount

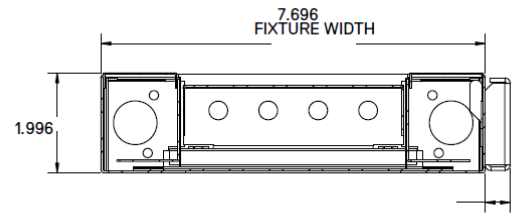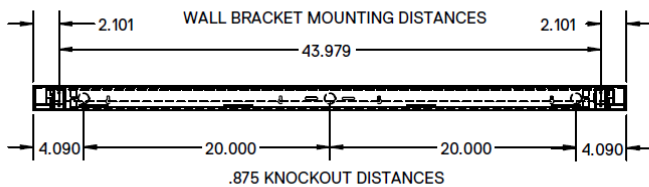

BRACKET DEPTH, SCREW TO
WOODEN STUD, DRYWALL
AROUND THE BRACKET

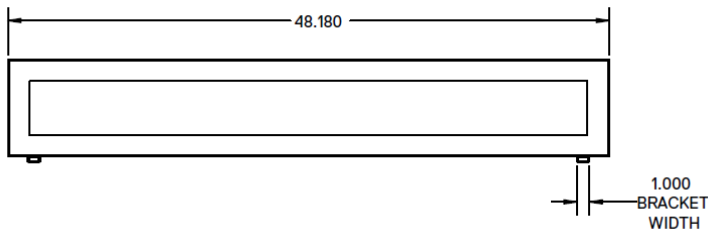

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LL P 48 LED 24 DMV WH MW 8 30 EM

LL

1. SERIES	2. MOUNTING	3. SIZE	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER
LL	P Low Profile Pendant S Low Profile Surface Mount W Low Profile Wall Mount	48 48" 96 96"	LED (blank) U Uplight only 1U2D 1/3 uplight, 2/13 downlight 2U1D 2/3 uplight, 1/3 downlight	24 24 Watts, 2400 lumens 48 48 Watts, 4800 lumens 36 36 Watts, 3600 lumens 54 54 Watts, 5400 lumens 48 48 Watts, 4800 lumens 96 96 Watts, 9600 lumens 72 72 Watts, 7200 lumens 108 108 Watts, 10800 lumens	DMV 0-10V Dimming, 120-277V Multivolt
7. FINISH	8. LENS	9. COLOR TEMP	10. EMERGENCY (O)*	11. CABLE KIT	
WH White SL Silver RD Red IN Iron BK Black	MW White Lens FR Frosted Lens	30 3000K 35 3500K 40 4000K 45 4500K	EM White EM5 Silver EM7 Red	(Blank) HC401 4ft kit w/ 3 wire white cord & cable H12W HC402 12ft cable kit w/ 3 wire white cord & cable H4W5 HC401 4ft cable kit w/ 5 wire white cord & cable H12W5 HC402 12ft cable kit w/ 5 wire white cord & cable	

*(O) is optional

Dimensions and specifications subject to change without notice.

