



**Type IC, Wet, Air-Tight & Open Plenum**


**DESCRIPTION**

4" Round Deep Regressed LED - Elegant Design Without Glare  
Commercial Grade Quality Built To Last


**FEATURES & BENEFITS**

5 single CCT, Dim to Warm, & 5CCT field selectable options  
3 1/2" Deep - Install Where Ceiling Space Is Limited  
Armored Cable & Metal Connectors - Open Plenum Rated  
Driver Inside Connection Box with Romex Quick Connectors  
and Knock Outs - Fast Installation & No Junction Box Needed  
Type IC, Air-Tight & Wet Location - No Housing Required

**DIMENSIONS** ID 4" OD 4 7/8" Cut Out 4 1/4"

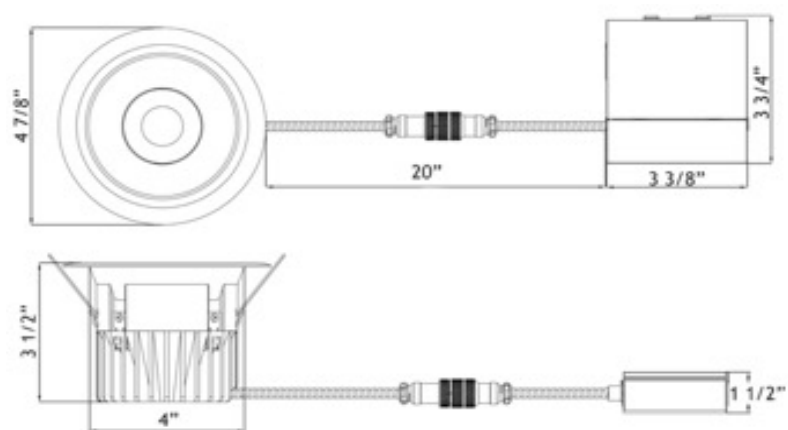

120V TRIAC Dimmable Driver Included      Optional 120V-347V

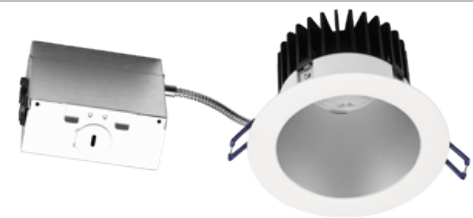

0-10V Dimmable Driver  
Order Separately as  
[model # LLL-LD1535TR](#)



**ORDERING GUIDE** Example **LD4R-30K-4R-WR-WT**

	CCT	Reflector - Trim
<b>LD4R</b>	<b>- xxK</b>	<b>- 4R-xx-xx</b>
2700K	<b>27K</b>	<b>4R-WR-WT</b>
3000K	<b>30K</b>	<b>4R-SR-WT</b>
3500K	<b>35K</b>	<b>4R-BR-WT</b>
4000K	<b>40K</b>	<b>4R-BR-BT</b>
5000K	<b>50K</b>	<b>4R-SR-BT</b>
Dim To Warm 3000K to 2000K	<b>32K</b>	<b>4R-ORB</b>
Dim To Warm 3000K to 1800K	<b>3018K</b>	
User selectable 27-30-35-40-50K	<b>5CCT</b>	



**Lotus LED Lights USA**  
250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)  
mailing addresses  
warehouses

**Lotus LED Lights CANADA**  
702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090  
Delta BC & Mississauga ON

**LD4R**

**4" Round Deep Regressed LED Plenum Rated 15W**

Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Model #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Recessed Ceiling Mount
Energy Used	15W
Color Temperature (K)	2700   3000   3500   4000   5000   DTW 30-20K   DTW 30-18K
Light Output (lm)	1100   1200   1250   1300   1400   900   980
Beam Angle	30°
CRI	90 +
Default Driver Input	120V AC      Triac Dimmable
Optional Driver Input	120V-347V AC      0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW & 5CCT), T24
Warranty	10 Year Residential / 5 Year Commercial

**AVAILABLE TRIMS**



**White Reflector   Silver Reflector   Black Reflector   Black Reflector   Silver Reflector   Oil**  
**White Trim      White Trim      White Trim      Black Trim      Black Trim      Rubbed Bronze**  
**4R-WR-WT      4R-SR-WT      4R-BR-WT      4R-BR-BT      4R-SR-BT      ORB**

**ACCESSORIES**      Sold Separately



[26" Long Flat Rough-In Plate model # RIP4](#)



[13" Long Flat Rough-In Plate model # MP4-2](#)



[13" Long Flanged Rough-In Plate model # MP4](#)



[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)



[Armored Low Voltage Extension 10ft model # MEC10](#)



[Goof Ring 5 3/4" White model # GR4 Black model # GR4-BK](#)

**COMPLIANCE**



**Type IC & Air-Tight**  
**Wet Location**  
**Open Plenum**