



# LD4S

## 4" Square Deep Regressed LED Plenum Rated 15W



**Type IC, Wet, Air-Tight & Open Plenum**

### DESCRIPTION


4" Square Deep Regressed LED - Elegant Design Without Glare  
Commercial Grade Quality Built To Last

### FEATURES & BENEFITS

- 5 single CCT, Dim to Warm, & 5CCT field selectable options
- 3 1/2" Deep - Install Where Ceiling Space Is Limited
- Armored Cable & Metal Connectors - Open Plenum Rated
- Driver Inside Connection Box with Romex Quick Connectors and Knock Outs - Fast Installation & No Junction Box Needed
- Type IC, Air-Tight & Wet Location - No Housing Required

### DIMENSIONS ID 4" OD 4 7/8"

Cut Out 4" to 4 1/4". Ceiling Clearance Required: 3"

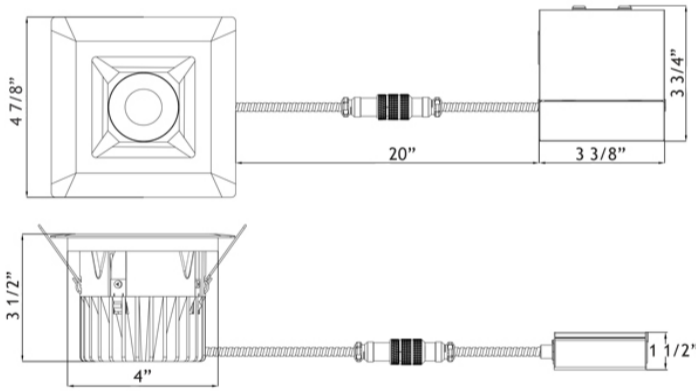

120V TRIAC Dimmable Driver Included      Optional 120V-347V

0-10V Dimmable Driver

Order Separately as

[model # LLL-LD1535TR](#)



### ORDERING GUIDE Example LD4S-30K-4S-WR-WT

LD4S	CCT	Reflector - Trim
	- xxK	- 4S-xx-xx
2700K	<b>27K</b>	<b>4S-WR-WT</b>
3000K	<b>30K</b>	<b>4S-SR-WT</b>
3500K	<b>35K</b>	<b>4S-BR-WT</b>
4000K	<b>40K</b>	<b>4S-BR-BT</b>
5000K	<b>50K</b>	<b>4S-SR-BT</b>
Dim To Warm	<b>32K</b>	3000K to 2000K
Dim To Warm	<b>3018K</b>	3000K to 1800K
5 CCT	<b>5CCT</b>	User selectable 27-30-35-40-50K



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Recessed Ceiling Mount
Energy Used	15W
Color Temperature (K)	2700   3000   3500   4000   5000   DTW 30-20K   DTW 30-18K
Light Output (lm)	1100   1200   1250   1300   1400   900   980
Beam Angle	30°
CRI	90 +
Default Driver Input	120V AC      Triac Dimmable
Optional Driver Input	120V-347V AC      0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW & 5CCT), T24
Warranty	10 Year Residential / 5 Year Commercial

### AVAILABLE TRIMS



- |                        |                         |                        |                        |                         |
|------------------------|-------------------------|------------------------|------------------------|-------------------------|
| <b>White Reflector</b> | <b>Silver Reflector</b> | <b>Black Reflector</b> | <b>Black Reflector</b> | <b>Silver Reflector</b> |
| <b>White Trim</b>      | <b>White Trim</b>       | <b>White Trim</b>      | <b>Black Trim</b>      | <b>Black Trim</b>       |
| <b>4S-WR-WT</b>        | <b>4S-SR-WT</b>         | <b>4S-BR-WT</b>        | <b>4S-BR-BT</b>        | <b>4S-SR-BT</b>         |

### ACCESSORIES

Sold Separately



[26" Long Flat Rough-In Plate model # RIP4](#)



[13" Long Flat Rough-In Plate model # MP4-2](#)



[13" Long Flanged Rough-In Plate model # MP4](#)



[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)

[Armored Low Voltage Extension 10ft model # MEC10](#)

### COMPLIANCE



**Type IC & Air-Tight**  
**Wet Location**  
**Open Plenum**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

mailing addresses  
warehouses

702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090  
Delta BC & Mississauga ON