


## 4" Square Slim Recessed LED 11W



### Type IC, Wet & Air-Tight

#### DESCRIPTION

4" Square Slim Recessed LED With  
Integral Driver In Connection Box


#### FEATURES & BENEFITS

- 1 3/8" Deep - Install Where Ceiling Space Is Limited
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required

#### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached  
Spring Clips. Ceiling Clearance Required For Driver: 2"

DIMENSIONS: ID 4 1/8" OD 4 3/4" Cut Out 4 1/8" to 4 1/4"

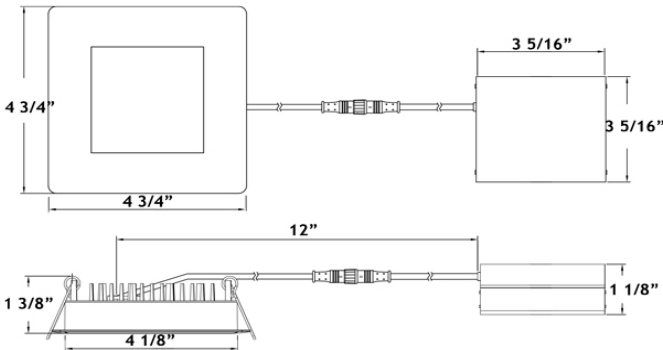

120V TRIAC Dimmable


Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



#### AVAILABLE TRIMS



#### ORDERING GUIDE Example: LY4S / 30K / WH

	CCT	Trim Finish	
<b>LY4S</b>	/	/	
3000K	<b>30K</b>	<b>WH</b>	White
4100K	<b>41K</b>	<b>BK</b>	Black
		<b>BN</b>	Brushed Nickel

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

#### SPECIFICATION

Applications	Recessed Ceiling	
Energy Used	11 W	
Colour Temperature	3000	4100
Light Output	700	800
Halogen Equivalent	65 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 36,000 Hours	
Certification	cULus, Energy Star	
Warranty	5 Year	

#### ACCESSORIES

Sold Separately



Low Voltage Extension Cables  
6ft - cat # **EXC6**, 20ft - cat # **EXC20**  
Max 40 ft Allowed. FT4 / CMR rated



26" Flat Rough-In Plates - cat # **RIP4**



13" Flat Rough-In Plate - cat # **MP4-2**



Flanged Plate with Hanger Bars - cat # **FRP4**

#### COMPLIANCE



Type IC  
Air-Tight