

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED Multi Wattage Multi CCT Post Top Light



CONSTRUCTION:

Polyester powder-coated finish

OPTICAL SYSTEM:

Philips Lumileds 3030 LED chips. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Pole mounting – Suitable for 3” poles

CONTROLS & DIMMING:

0-10V dimming comes standard.

FEATURES

- Default Wattage: 150W
- Default CCT: 5,000K
- IP65 rated
- Type 5 lens
- Rust & corrosion proof
- No lead or mercury
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Area lighting
- Parking decks
- Auto dealerships
- High masts
- Housing complexes
- Shopping malls
- Sporting complexes
- Parks and Recreational areas
- Municipal lots



DLC Product ID:

- LOC-PT-MW(60/80/100/150)MCCT(30/40/50)DLV – S-84G27F



OPTIONAL ACCESSORIES:



Motion Sensor
LOC-ANT-5-4T
(Compatible with remote control)



Remote Control
LOD-RC-100



Photocell (Daylight Sensor)
LOC-SK-101-4T
(Not compatible with remote control)




Bi-Level PIR Sensor
LOC-ANT-6-4T
(Compatible with remote control)

BUG RATING	EPA
B4-U1-G1	1.96

LED Multi Wattage Multi CCT Post Top Light

LOC-PT-MW(60/80/100/150)MCCT(30/40/50)DLV								
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
60W	3000K / 4000K / 5000K	8,251.8LM	137.53lm/W	120-277V	71	0.974	8%	50W – 100W HID
80W	3000K / 4000K / 5000K	11,002.4LM	137.53lm/W	120-277V	71	0.974	8%	50W – 100W HID
100W	3000K / 4000K / 5000K	13,753LM	137.53lm/W	120-277V	71	0.974	8%	50W – 100W HID
150W	3000K / 4000K / 5000K	20,897LM	137.53lm/W	120-277V	71	0.974	8%	50W – 100W HID

MEASUREMENTS

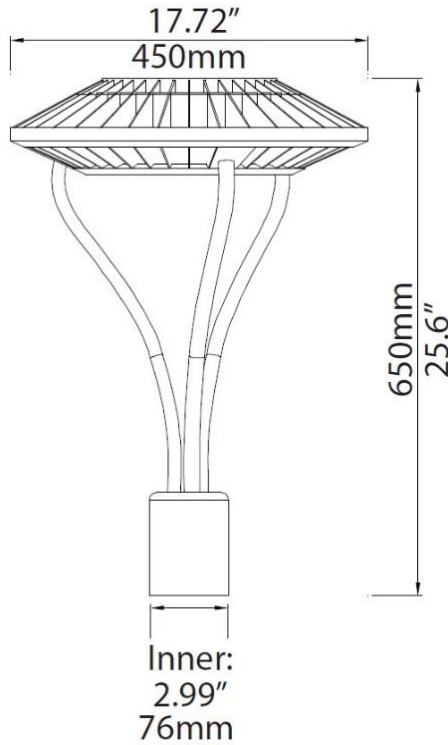

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-PT-MW(60/80/100/150)MCCT(30/40/50)DLV	1	lbs	00810050941310

