


## PRODUCT DESCRIPTION:

Integral secondary heat sink to optimize thermal transfer and maximize the performance of the LED chips.

## FEATURES:

- Philips Lumileds 3030 LED chips
- Certified to ANSI C136.31-2001, 3G vibration standards
- Precision molded proprietary acrylic lenses provides multiple photometric
- Aluminum heat sink
- UV Stabilized
- Polyester antistatic powder-coated finish
- Rust and corrosion proof
- Stabilized to prevent cracking or peeling

## DIMENSIONS:

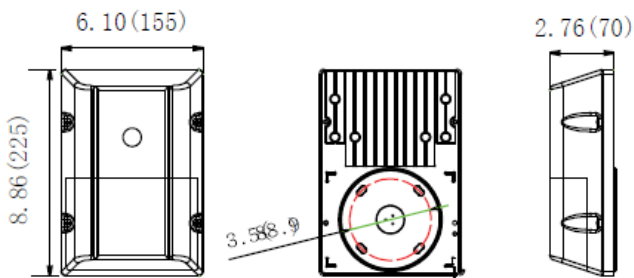

## Mini Wall Pack 25W Spec

LOD-MWP-25WD40K-HL

LOD-MWP-25WD50K-HL



### SPECIFICATIONS:

SPECIFICATION	Details	
Model	LOD-MWP-25WD40K-HL	LOD-MWP-25WD50K-HL
Input Wattage (W)	25W	
Lumens Delivered (LM)	3,096.69LM	3,225LM
Efficacy (LM/W)	127.17LM/W	129LM/W
CRI	84.7	80
Lifespan	50,000 hours	
Color Temperature	4,000K	5,000K
Wattage Equivalent	50W – 70W HID	
Dimmable	No	
IP Rating	IP65	
Beam Angle	125	
Input Voltage	AC110-277V	
Power Factor	0.923	0.92
Housing	High Pressure Die Casting Housing	
Lens	UV Stabilized Plastic Lens	
Mounting	Wall Mount	
THD	13.2%	20%
Size	8.86" x 6.10" x 2.76"	
Certification	DLC, ETL	
Operating Temperature	-40°C to 50°C (-4°F to 122°F)	
Environment	Outdoor	
Warranty	5 years limited	

