



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

Designed especially for LED, this new LED series provides beautiful glare free lighting from LED arrays. Downlight is shielded with a sleek, rounded frosted ribbed lens. Optional up-light utilizes its own LED array that can be separately switched and is lensed for applications that can be seen from above. Configure for individual lengths in four and eight foot or joined together easily for continuous runs. Pendant mount with adjustable cable kit and available in a variety of off the shelf finishes or custom finishes.



### DLC

DLC listed on certain models (refer to chart on page 2)

### MOUNTING

Standard 4' adjustable power feed & cable (2 for 4' unit or 8' unit, included).

### CONSTRUCTION

Rugged steel housing with anti-rust protection powder coated white. Custom paint finishes available.

### TYPICAL OPTIONS AND ACCESSORIES

Emergency driver, occupancy sensors, hanging kits, factory installed dimming, standard and custom colors. Contact factory for additional options.

### LISTING




Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.  
cETL<sub>us</sub> listed for damp locations.

### DIMENSIONS

#### W x L x H in inches (mm)

4ft. - 10.8"W x 47"L x 3.94"H

8ft. - 10.8"W x 94"L x 3.94"H

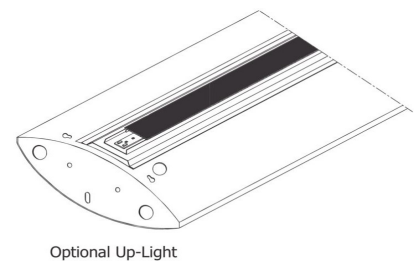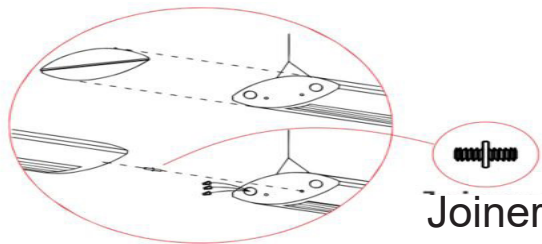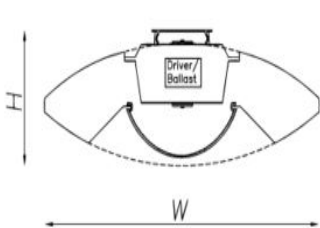

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: LPLIA 48 LED 24 DMV WH MW 30 EM PI1 H4W

LPLIA		LED				
1. SERIES	2. SIZE	3. GEAR	4. UPLIGHT/DOWNLIGHT	5. WATTAGE/LUMENS	6. DRIVER	7. LENS
<b>LPLIA</b> LED Wide Area Direct/ Indirect	<b>48</b> 4' nominal	<b>LED</b>	<b>Blank</b> Down-light only	<b>4 ft. Up or Down Only</b>		<b>Blank</b> Frosted Lens Down no upright lens
	<b>96</b> 8' nominal		<b>U<sup>1</sup></b> Up-light only (Not DLC Listed)	<b>24</b> 24 Watts 3025 Lumens	<b>35</b> 35 Watts 4505 Lumens	
		<b>1U2D<sup>1</sup></b> 33% Up 66% Down	<b>48</b> 48 Watts 5925 Lumens	<b>48</b> 48 Watts 5925 Lumens	<b>SDMV<sup>2</sup></b> Step Dimming 120-277VAC 100%-40%	<b>UL</b> Uplight Lens (Uplight options only) (Not DLC Listed)
			<b>60</b> 60 Watts 6900 Lumens	<b>60</b> 60 Watts 6900 Lumens		
				<b>4 ft. Uplight &amp; Downlight</b>		
				<b>36</b> 36 Watts 1595L Up 3190L Down		
				<b>48</b> 48 Watts 2155L Up 4310L Down		
				<b>60</b> 60 Watts 2630L Up 5260L Down		
				<b>90</b> 90 Watts 3600L Up 7200L Down		
				<b>8 ft. Up or Down Only</b>		
				<b>48</b> 48 Watts 5925 Lumens		
				<b>70</b> 70 Watts 9010 Lumens		
				<b>96</b> 96 Watts 11850 Lumens		
				<b>120</b> 120 Watts 13800 Lumens		
				<b>8 ft. Uplight &amp; Downlight</b>		
				<b>70</b> 70 Watts 3190L Up 6380L Down		
				<b>96</b> 96 Watts 4310L Up 8620L Down		
				<b>120</b> 120 Watts 5260L Up 10520L Down		
				<b>180</b> 180 Watts 7210L Up 14420L Down		

8. HOUSING COLOR	9. COLOR TEMP	10. EMERGENCY <sup>1</sup> (O) <sup>3</sup>	11. PLUG IN OPTIONS <sup>1</sup> (O) <sup>3</sup>	12. HANGING KIT <sup>1</sup> (O) <sup>3</sup>	13. CONFIGURATION
<b>WH</b> White (std.)	<b>30</b> 3000K	<b>EM</b> 10W, ~1300 lumen battery backup	<b>PI1</b> 3 wire harness, including white, black, and green	<b>H4W</b> 4 Ft. cable kit w/ 3 wire white cord & cable	<b>Blank</b> Individual
<b>SL</b> Metallic Silver	<b>35</b> 3500K	<b>EM7</b> 7W, ~900 lumen battery backup	<b>PI2</b> 4 wire harness, in- cluding white black, green, and blue for emergency battery backup	<b>H4W5</b> 4 Ft. cable kit w/ 5 wire white cord & cable	<b>-B</b> Beginner Run
<b>RD</b> Red	<b>40</b> 4000K	<b>EM5</b> 5W, ~600 lumen battery backup	<b>PI3D</b> 5 wire harness, including white, black, green, violet, and gray	<b>H12W</b> 12 Ft. cable kit w/ 3 wire white cord & cable	<b>-E</b> Ender Run
<b>IN</b> Iron	<b>50</b> 5000K			<b>H12W5</b> 12 Ft. cable kit w/ 5 wire white cord & cable	<b>-J</b> Joiner
<b>BK</b> Black					

**NOTES:**

<sup>1</sup>Consult for Uplight Options  
<sup>2</sup>Consult for Triac and Step Dimming  
<sup>3</sup>O is optional

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**DLC INFORMATION**

DLC Standard	
LPLIA48-LED1U2D36DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED1U2D48DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED1U2D60DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED1U2D90DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED24DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED35DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED48DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA48-LED60DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED48DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED70DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED96DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED120DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D70DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D96DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D120DMVWHxx	xx = Color Temp 30, 35, 40, 50
LPLIA96-LED1U2D180DMVWHxx	xx = Color Temp 30, 35, 40, 50



Dimensions and specifications subject to change without notice.

