

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_




Surface Mount  
Bracket Included

**LPS-S4-50K-D**  
**LPS-S4-40K-D**  
**LPS-S4-30K-D**

**DIMENSIONS:**

5.11"(L)X5.11"(W)X0.51"(H)

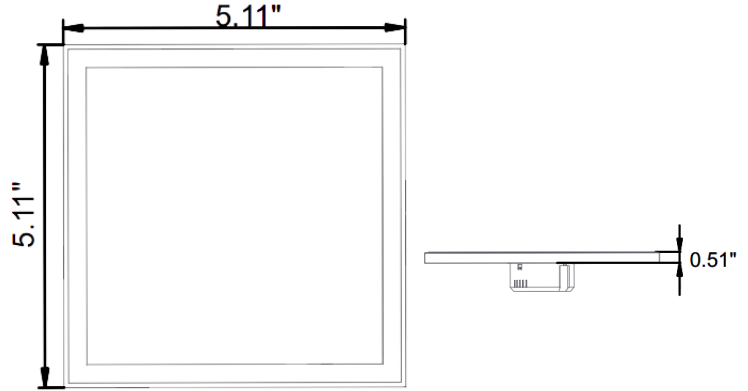

MODEL	WATTS	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPS-S4-50K-D	10W	120~277VAC	700LM	5000K
LPS-S4-40K-D	10W	120~277VAC	700LM	4000K
LPS-S4-30K-D	10W	120~277VAC	700LM	3000K

**LED SURFACE MOUNT PANELS**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120-277VAC 50/60Hz
- Wattage: 10W
- Power factor: >0.95
- Efficacy: 70LM/W

**HOUSING SPECIFICATIONS:**

- White finish surface mount panel
- External Driver
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

**CERTIFICATIONS: UL**



**LIGHTING SPECIFICATIONS:**

- Dimming: 120V AC input with TRIAC dimming, 100-277V AC input NON-dimmable
- Recommended Dimmers: DVCL-153P, MSCL-OP153M, CTCL-153P, SCL-153P
- Total lumens: 700LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >90

**WARRANTY: 5 years**

