


JOB NAME: _____

DATE: _____

TYPE: _____




Surface Mount
Bracket Included

LPS-S6-50K-D
LPS-S6-40K-D
LPS-S6-30K-D

DIMENSIONS:

7.28"(L)X7.28"(W)X0.51"(H)

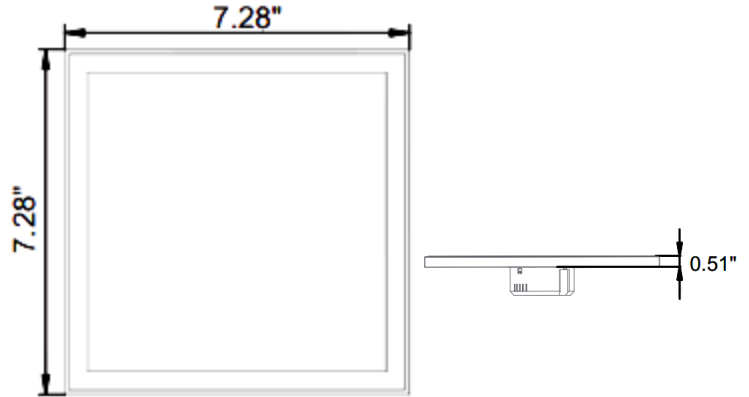

MODEL	WATTS	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPS-S6-50K-D	12W	120~277VAC	900LM	5000K
LPS-S6-40K-D	12W	120~277VAC	900LM	4000K
LPS-S6-30K-D	12W	120~277VAC	900LM	3000K

LED SURFACE MOUNT PANELS

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 12W
- Power factor: >0.95
- Efficacy: 75LM/W

HOUSING SPECIFICATIONS:

- White finish surface mount panel
- External Driver
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL



LIGHTING SPECIFICATIONS:

- Dimming: 120V AC input with TRIAC dimming, 100-277V AC input NON-dimmable
- Recommended Dimmers: DVCL-153P, MSCL-OP153M, CTCL-153P, SCL-153P
- Total lumens: 900LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >90

WARRANTY: 5 years

