

JOB NAME: _____

DATE: _____


TYPE: _____



Surface Mount
Bracket Included

DIMENSIONS:

9.06"(L)X9.06"(W)X0.51"(H)

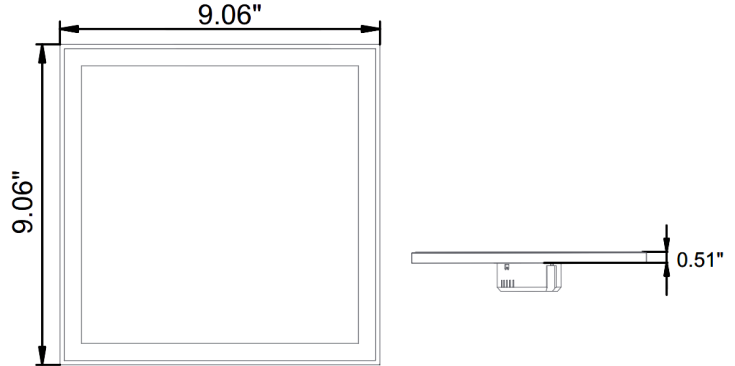

- LPS-S8-50K-D**
- LPS-S8-40K-D**
- LPS-S8-30K-D**

LED SURFACE MOUNT PANELS

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 16W
- Power factor: >0.95
- Efficacy: 80LM/W

HOUSING SPECIFICATIONS:

- White finish surface mount panel
- External Driver
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPS-S8-50K-D	16W	120~277VAC	1280LM	5000K
LPS-S8-40K-D	16W	120~277VAC	1280LM	4000K
LPS-S8-30K-D	16W	120~277VAC	1280LM	3000K

LIGHTING SPECIFICATIONS:

- Dimming: 120V AC input with TRIAC dimming, 100-277V AC input NON-dimmable
- Recommended Dimmers: DVCL-153P, MSCL-OP153M, CTCL-153P
- Total lumens: 1280LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >90

WARRANTY: 5 years

