


**DIMENSIONS:**

23.90"(L) x 23.90"(H) x 2.64"(W)

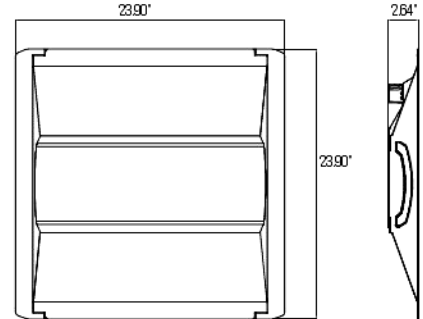

**LRT-HL-2X2-40W-35K-D**  
**LRT-HL-2X2-40W-40K-D**  
**LRT-HL-2X2-40W-50K-D**

**LED DOOR FRAME TROFFER RETROFIT KIT**

Replaces door frame & lens of traditional fluorescent flat-lens troffer fixture. No need to remove old fixture; simply remove and discard the door frame of the existing fixture; place 2 adapter brackets (Included) in the existing fixture; hinge this retrofit unit to the fixture; disconnect the ballast; connect the wires to the retrofit unit and close.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 100-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.90
- Efficacy: 130LM/W
- THD: >20%

**HOUSING SPECIFICATIONS:**

- Housing: Steel base with white powder coating
- Steel Thickness: 24 Gauge
- Retrofit baskets included
- Operating temperature: -4°F ~ 131°F
- Life span: 50,000hrs
- IP Rating: IP20

**CERTIFICATIONS: UL,DLC**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LRT-HL-2X2-40W-35K-D	40W	100~277V AC	5200LM	3500K
LRT-HL-2X2-40W-40K-D	40W	100~277V AC	5200LM	4000K
LRT-HL-2X2-40W-50K-D	40W	100~277V AC	5200LM	5000K

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V dimmable
- Lens: frosted diffuse PC lens
- Total lumens: 5200LM
- Color temperature: 3500K/4000K/5000K
- Color rendering index: >80
- Beam Angle: 140°

**WARRANTY: 5 years**

