

LSL SERIES

Commercial Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LSL-4FT-40W-35K-D
LSL-4FT-40W-40K-D
LSL-4FT-40W-50K-D

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



Selection:

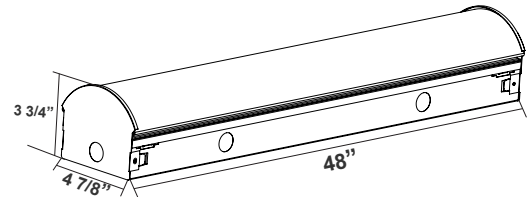

48"(L) x 4-7/8"(W) x 3-1/4"(H)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and the world's top brand LED driver. Same footprint as traditional 2-lamp strip lights

Features

- LED Strip Lights
- Strip Line Cover
- White Finish
- 50,000 Hours Rated Life
- 5-Year Warranty
- Lens: Frosted Diffuse Polycarbonate Lens with Strip Lines Inside

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W
- Power Factor: >0.98
- Efficacy: 105 LPW

Mechanical:

- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps into the tabs of the Housing Fixture
- Ceiling-Mounted
- Same Footprint as Traditional 2-lamp Strip Lights
- Mounting: Surface Mount, Wall Mount or Suspended
- Operating Temperature: -22°F -104°F

Lighting:

- Dimmable: 0~10V Dimming
- Chip: Samsung
- Total Lumens: 4200LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- IP Rating: IP44

Applications:

- Ideal for architectural lighting solutions, a variety of industrial, commercial and residential applications

Other Models:

- 80W | 8400LM | LSL-8FT-80W-40K-D • 84W | 11000LM | LSL-8FT-84W-40K-D-HL
- 80W | 8400LM | LSL-8FT-80W-50K-D • 84W | 11000LM | LSL-8FT-84W-50K-D-HL





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatefmfg.com | www.westgatecontrols.co




WG-Z5-2C-2Z

Photometrics: LSL-4FT



BUD Rating: B1-U3-G2

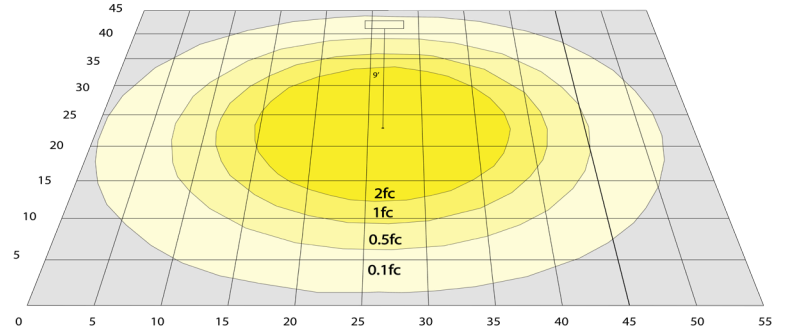


Area 45'x 55' Mounting Height: 9'

Other Views:



Front View



Side View



Back View

Performance Table: LSL-4FT

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|-------------------|---------|----------|--------|-------------|------------|-----|
| LSL-4FT-40W-35K-D | 40W | 120~277V | 4200LM | 3500K | B1-U3-G2 | 105 |
| LSL-4FT-40W-40K-D | 40W | 120~277V | 4200LM | 4000K | B1-U3-G2 | 105 |
| LSL-4FT-40W-50K-D | 40W | 120~277V | 4200LM | 5000K | B1-U3-G2 | 105 |

Sample Ordering

| Model | Size | Wattage | Color Temp. | Feature |
|-------|------|---------|---|---------|
| LSL | 4FT | 40W | | D |
| | | | 35K = 3500K 40K = 4000K 50K = 5000K | |

Accessories:

Blank = No Option For Accessories
 LSL-4FT-WG = WIRE GUARD KIT FOR 4FT. STRIP LIGHT
 LSL-4FT-WK = SHOP LIGHT WING KIT
 SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT (2 PER SET)
 SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT (2 PER SET)


Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING
 OPT-SEN-2USRC = OPTIONAL RC
 OPT-SEN-LLHB-OC1 = LLHB-OC1 EXTERNAL STANDARD PIR OPT-SENSOR
 OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
 OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
 OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A, 125V, 3-CONDUCTOR 18AWG, WHITE
 OPT-SEN-DAYLIGHT = DAYLIGHT HARVESTING SENSOR WORKS WITH ABOVE OPT-SEN-2US

Example:

- LSL-4FT-40W-40K-D (For LSL 40W 4000K fixture 120-277V)
- LSL-4FT-40W-40K-D LSL-4FT-WG (For LSL 40W 4000K fixture 120-277V) (WIRE GUARD KIT FOR 4FT. STRIP LIGHT)
- LSL-4FT-40W-40K-D LSL-4FT-WG OPT-SEN-2US (For LSL 40W 4000K fixture 120-277V) (WIRE GUARD KIT FOR 4FT. STRIP LIGHT) (ULTRASONIC BI-LEVEL DIMMING REMOTE NOT NEEDED)

ACCESSORIES:



LSL-4FT-WG



LSL-4FT-WK



SCL-GSY10



SCL-GSY20

FACTORY-INSTALLED OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-HBC-277TL-WH



OPT-EM-CM1INT



OPT-SEN-2US



OPT-SEN-LLHB-OC1



OPT-SEN-2USRC



OPT-SEN-DAYLIGHT

