

JOB NAME: _____

DATE: _____




TYPE: _____



LW360-60W-50K LW360-60W-30K

DIMENSIONS:

9-1/8"(W) x 8-7/8"(H) x 5-3/8"(D)

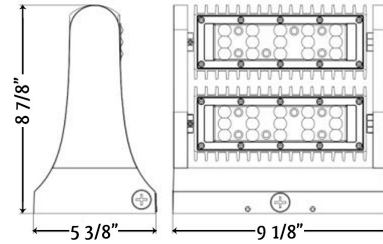

LW360 LED WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 60W
- Input Voltage: 120-277VAC 50/60Hz
- Other wattages: 25W, 80W
- Power factor: >0.9
- Efficacy: 125LM/W~130LM/W

HOUSING SPECIFICATIONS:

- Aluminum with (Black) powder coat finish
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- LED panel swivels 180° each direction

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LW360-60W-50K	60W	120~277V AC	7800LM	5000K
LW360-60W-30K	60W	120~277V AC	7500LM	3000K

LIGHTING SPECIFICATIONS:

- LED type/brand: CREE MHB-B
- Total lumens: 7500LM and 7800LM
- Color temperature: 3000K and 5000K
- Color rendering index: >70
- Beam angle: 60°

WARRANTY: 7 years



LW360-60W-50K LW360-60W-30K

LW360 LED WALL PACK

CERTIFICATIONS: UL



PHOTOMETRICS:

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LW360-60W-50K	60W	120~277V AC	7800LM	5000K
LW360-60W-30K	60W	120~277V AC	7500LM	3000K

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.43 lm/W			
MODEL		I _{max} (cd)	9609	S/MH (C0/180)	0.83
NOMINAL POWER (W)	60	LOR (%)	100.0	S/MH (C90/270)	0.78
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7853.9	η UP, DN (C0-180)	0.1, 53.6
NOMINAL FLUX (lm)	7853.91	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2, 46.1
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	99.7	CIBSE SHR MAX	0.80

