

G4 & G9 Wedge



features

- Direct replacement for halogen Incandescent G4 and G9 wedge base lamps
- Consumes 75% less energy and lasts 25x longer than incandescent bulbs
- 25,000 hour rated life for Energy Star® Qualified lamps*
- 50,000 hour design life**
- Choice of 3000K, 4000K, and 5000K color temperatures
- 200° multi-directional beam angle
- Durable acrylic lens with smooth polycarbonate body
- Contains no mercury. RoHS compliant
- Emits virtually no UV or IR radiation

RoHS
Compliant

cUL US LISTED

performance

- G4 12V 2.5W 200 Lumen true replacement for 10W halogen Incandescent
- G9 120V 2.5W 200 Lumen true replacement for 10W halogen Incandescent
- 80+ CRI
- Non-dimmable
- Not for use in totally enclosed luminaires
- Operating Temperature: -40°F to 104°F (-40°C to 40°C)

applications

- Landscape lighting
- Deck and patio
- Accent lighting
- Under cabinet lighting
- Pendant and downlighting
- Signs and display lighting
- Steps


* Early initial qualification for Energy Star allows for directional lamp life claims of 25,000 hours (L70) with 3,000 hour actual test data, LM80 data and in-situ temperature measurements. As the lamps pass Energy Star requirements, manufacturers may increase the lifetime of a product as dictated by Energy Star guidelines. See http://www.energystar.gov/index.cfm?fuseaction=products_for_partners.showLightbulbs for further details.

** Design life is based on engineering testing and probability analysis



G4 & G9 Wedge

dimensions

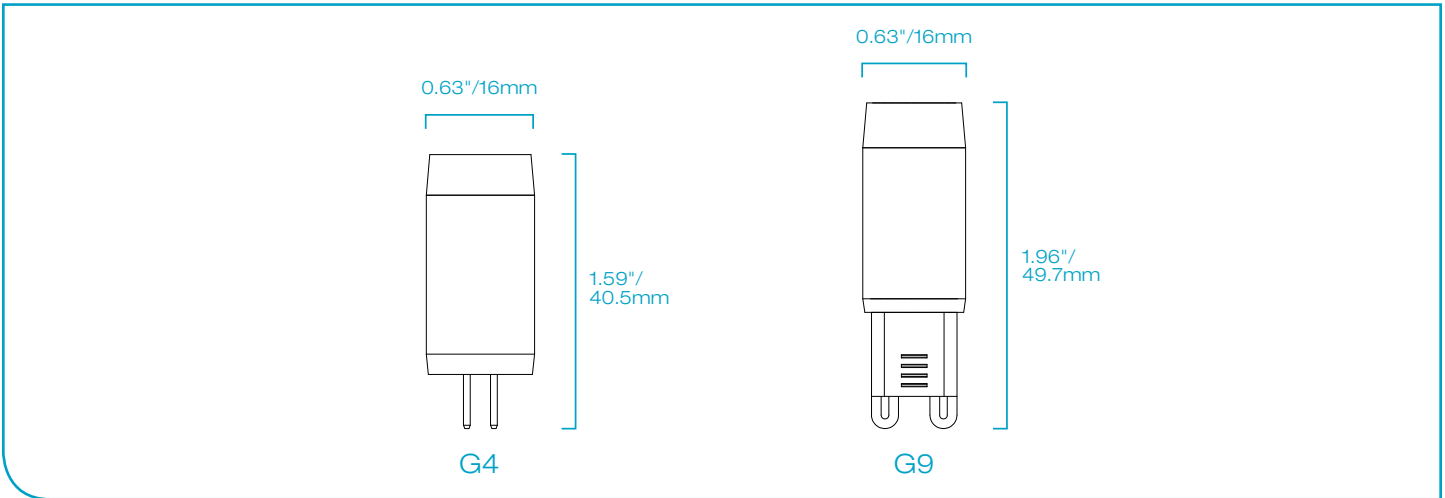

products

	LitespanLED® Part #	Order Code	Description	Watts	Lumens	Volts	MOL in/mm	MOD in/mm	Rated Hours*
G4	LED2WG4/830-G4	08605	200° beam non-dimmable 3000K 80+ CRI	2.5	200	12	1.6/40.5	0.6/16	25,000
	LED2WG4/840-G4	08606	200° beam non-dimmable 4000K 80+ CRI	2.5	200	12	1.6/40.5	0.6/16	25,000
	LED2WG4/850-G4	08607	200° beam non-dimmable 5000K 80+ CRI	2.5	200	12	1.6/40.5	0.6/16	25,000
G9	LED2WG9/830-G4	08608	200° beam non-dimmable 3000K 80+ CRI	2.5	200	120	1.96/49.7	0.6/16	25,000
	LED2WG9/840-G4	08609	200° beam non-dimmable 4000K 80+ CRI	2.5	200	120	1.96/49.7	0.6/16	25,000
	LED2WG9/850-G4	08610	200° beam non-dimmable 5000K 80+ CRI	2.5	200	120	1.96/49.7	0.6/16	25,000

* 25,000 hour Energy Star® rated life. 50,000 hour design life. See note on obverse.

watch > like > follow



selection. solutions. simplicity. eiko.com

23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 (F) 1.800.492.8975
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 (F) 1.888.705.1335