


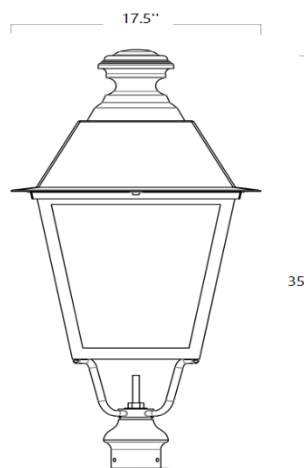

General Description:

The NebuLite TP882 series Post Top Lantern fixture is an Acorn fixture with the most up-to-date LED technology.

Construction:

- Stylish architectural lantern design.
- Corrosion resistant polyester powder coat finish, available in custom colors.
- Cast aluminum structure that resists high shock and vibration.

Mounting:

- Fits into any pole tenon 3" or less.

Electrical:

- High Power Factor, low THD UL listed driver with 10KV surge protection.
- Universal line voltage input 120-277V, 347/480V optional
- FCC compliant
- 0-10V dimmable optional

Optical:

- Frosted glass lens
- IES Type V distribution pattern
- Full range CCT from 3000K to 5000K

Warranty:

- 5 years' warranty for complete fixture

Listings:

ETL
FCC
DLC
RoHS
IP65



Ordering Information:

Family Model	Wattage	CCT	Optic	Color	Mounting	Input Voltage
YR-TP882	W30=30W	50K=5000K	(blank)=Type V, Std	(blank)=Black, Std BZ=Bronze	(blank)=Post-Top Mount, Std	(blank)=120-277V, Std HV=347-480V
	W60=60W	45K=4500K				
	W100=100W	40K=4000K				
		35K=3500K				
		30K=3000K				





NebuLite




Post Top Lantern

TP882-W30/60W/120W

Specs:

Family Model	Lumens	Wattage	lm/W	CCT	CRI	PF	THD	Size	Weight	L70
YR-TP882-W030	3,500lm	30W	115lm/W	3000K-5000K	75+	>0.9	<10%	17.5"x17.5"x35"	20lb	>100,000h
YR-TP882-W060	6,900lm	60W	115lm/W	3000K-5000K	75+	>0.9	<10%	17.5"x17.5"x35"	20lb	>100,000h
YR-TP882-W120	13,800lm	120W	115lm/W	3000K-5000K	75+	>0.9	<10%	17.5"x17.5"x35"	20lb	>100,000h

Photometrics:

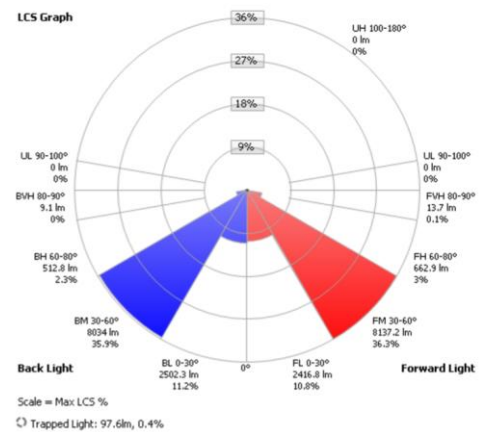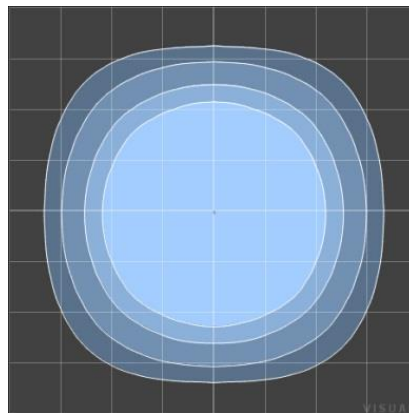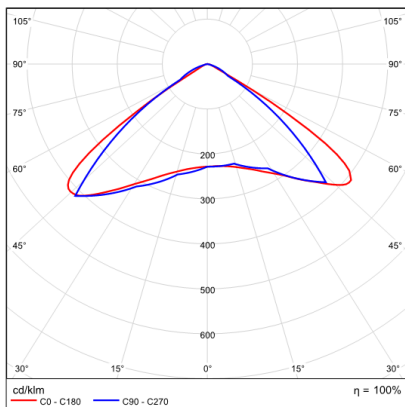

Sample Lighting Layout:



www.nebulite.com

Phone: (909) 627-5483 Fax: (909) 627-5482 Email: info@nebulite.com