

Project Name:	
Catalog Number:	Fixture Type:
Volts / Watts:	Lamps / Board:



PREMIUM HIGH BAY FROSTED - 76W LED

INDUSTRIAL

FEATURES

- Premium Efficiency Delivers Maximum Savings
- Aluminum Body with Steel Channel for Added Rigidity
- Tool-less Hinged Bottom Ballast Access Door
- High Gloss Polyester White Paint
- Riveted Construction & Vented Ballast Channel
- Multiple Dimming & Sensor Options to Fully Control Occupied and Unoccupied Light Levels
- 0-10V Dimming Driver (Std)*
- Frosted Acrylic, Clear Acrylic, or Polycarbonate Lens Options
- V-Clips for Dual Point Chain or Cabling Hanging (Std.)
- 5 Year Warranty
- DLC Premium® Qualified

**To Ensure Lead Wires Are Attached, "DIM" Call Out Is Required When Building Part Number*



LED SYSTEM

Calculated L70 (TM-21)	>100K
Delivered Lumens	10,211lm
Total Input Watts	77W
Luminaire Efficacy Rating (LER)	131lm/W
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	>80
Max Ambient Temp	150°F
Min Ambient Temp	-30°F
Universal Driver	120-277V

LED System data above based on PHB-76WLED-UNIV-50-FRL
LED Lumen Maintenance Estimates based on TM-21 projections for the light source at 25°C ambient
Specific Configurations Listed on DLC

SUITABLE APPLICATIONS

- Warehouses
- Distribution Centers
- Manufacturing Plants
- Gymnasiums



Intertek

Ordering Guide


PHB	76WLED	UNIV	50	e.g. FIOS
-----	--------	------	----	-----------

Series	LED	Driver	Color	Options
--------	-----	--------	-------	---------

<input type="checkbox"/> PHB Premium High Bay	<input type="checkbox"/> 76WLED	<input type="checkbox"/> UNIV 120-277V Driver	<input type="checkbox"/> 40 <input type="checkbox"/> 50	<input checked="" type="checkbox"/> FRL <input type="checkbox"/> PCL* <input type="checkbox"/> FIOS <input type="checkbox"/> FIOSPC <input type="checkbox"/> FIOSPC/DLH <input type="checkbox"/> DIM <input type="checkbox"/> USB <input type="checkbox"/> BDxx <input type="checkbox"/> BDxxPC <input type="checkbox"/> DHPC <input type="checkbox"/> PC <input type="checkbox"/> SD480* <input type="checkbox"/> SD347* <input type="checkbox"/> FI/ILBCP10** <input type="checkbox"/> FI/ILBCP12** <input type="checkbox"/> CORDx <input type="checkbox"/> QDCx <input type="checkbox"/> HB-60-18Y-PAD <input type="checkbox"/> WC* <input type="checkbox"/> FMB <input type="checkbox"/> HUB 3/4" Conduit <input type="checkbox"/> HOOK <input type="checkbox"/> SMBZKIT	Frosted Acrylic Lens Polycarbonate Lens On/Off Occupancy Sensor On/Off Occupancy Sensor w/ Photocell On/Off Occ. Sensor w/ Daylight Harvesting 0-10V Dimming Driver User Select Bi-Level Dim w/ Occ. Sensor Preset Bi-Level Dim Sensor (xx = % e.g. 20, 30) Preset Bi-Level Dim Sensor w/ Photocell Daylight Harvesting Photocell 480V Step Down Transformer 347V Step Down Transformer 10W LED Factory Installed Battery Backup 12W LED Factory Installed Battery Backup Cord (x = Feet) Quick Disconnect Cord (x = Feet) Adjustable 60" Cable Hanging Set 11GA Wire Cage Fixture Mounting Bracket For Pendant Mounting Cast Iron, Single Point Mount Surface Mount Bracket Kit
		*Option Not Currently DLC Qualified			
		**Reduces Max Ambient Temp.			


PREMIUM HIGH BAY FROSTED - 76W LED

INDUSTRIAL

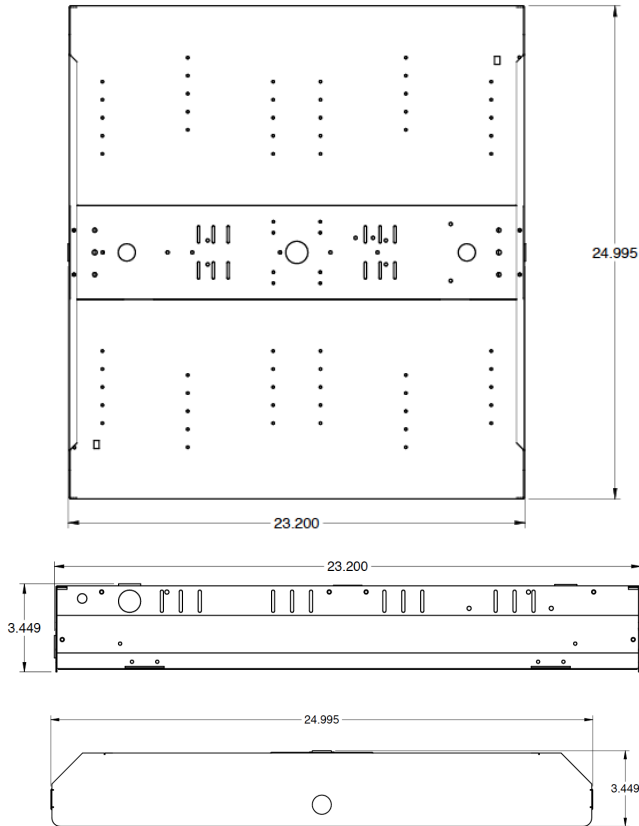


MOUNTING OPTIONS

- **V-Clips** - For Dual Point Chain or Cable Hanging (Std.)
- **Y-Toggle Cable Kit** - Includes 2 Adjustable 60" Cable Hangers
- **SMBZKIT** - For Surface Mounting with 2" Space Above Fixture
- **Fixture Mounting Box (FMB)** - Includes Rigid Box to Attach to the Fixture, Provides for Single Point Mounting to Accept a Pendant, Hook, or Conduit Hub (sold separately).




V-Clips



HB-60-18Y-PAD



SMBZKIT



FMB



HUB 3/4
CONDUIT




HOOK

PHB-76WLED-UNIV-50-FRL

SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Total):	100.0%
EFFICIENCY (Downlight):	100%
EFFICIENCY (Uplight):	0.0%
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg):	1.21
SPACING CRITERION (90-Deg):	1.22
LUMENS/LAMP:	9,852
NO. OF LAMPS:	1
LUMINOUS OPENING: RECTANGULAR:	
Width:	1.92 (Feet)
Length:	2.00
Height:	0.00
INPUT WATTS:	78.1

PLANE AND CONE DIAGRAM

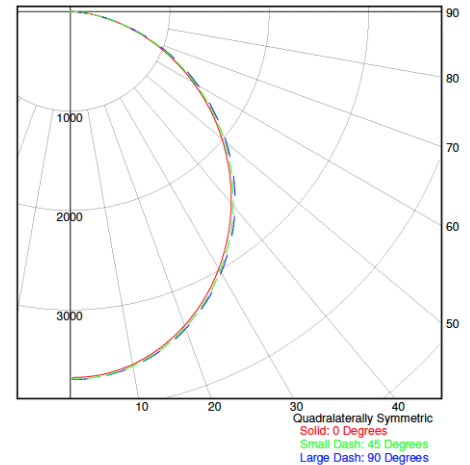

Photometric values based upon tests performed in compliance with LM-79. IES files can be downloaded at www.ilp-inc.com

Industrial Lighting Products

lighting facts[®]
A Program of the U.S. DOE

Light Output (Lumens)	10211
Watts	77.5
Lumens per Watt (Efficacy)	131.75

Color Accuracy Color Rendering Index (CRI)	80
--	-----------

Light Color
Correlated Color Temperature (CCT) **5000 (Daylight)**

Warm White
Bright White
Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: -EPUG3B (7/8/2016)
Model Number: PHB-76WLED-UNIV-50-FRL
Type: Luminaire - Industrial