


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's PT-WPH3 series combines economical and security solution for outdoor perimeter and building facades. WPH3 is wattage and color selectable, and can be programmed with a CCT of 4000K, 4500K or 5000K, eliminating the need to stock multiple color temperatures.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.

CCT
SELECTABLE

WATTAGE
SELECTOR



CONSTRUCTION

Die-Cast aluminum housing. Sealed by a silicone ring that makes the fixture waterproof, internal level ensures installation is horizontal.

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage (120V-277V), uses long lasting, high-efficient LED packages.

OPTICAL SYSTEM

Borosilicate glass lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

ENERGY SAVINGS

Over 50% energy savings than traditionally fluorescent fixtures, low heat productions requires less maintenance and operation cost.

LISTING

UL Listed, DLC Premium Listed

WARRANTY

5 year Limited Warranty, Rated for 50,000 hours.
See Warranty documentation for details.

WATTAGE	DELIVERED LUMENS	EFFICACY
(LW) 75W	10400	135 lm/W
(HW) 120W	16448	135 lm/W

Based on highest wattage setting @ 4000K. Actual lumens may vary.

TECHNICAL SPECIFICATION

CCT	4000K/4500K/5000K
CRI	82
DIMMABLE	0-10V Dimming
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited




ORDERING SAMPLE: - - - -

Series	Wattage	CCT	Accessories/Options	
PT-WPH3 Commercial Grade Wall Pack Luminaire	LW (45W/60W/75W)	3CP (4000K/4500K/5000K)	Photocell	EM Battery
	HW (80W/100W/120W)		blank P (Photocell)	blank EM (EM battery)

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

DIMENSION

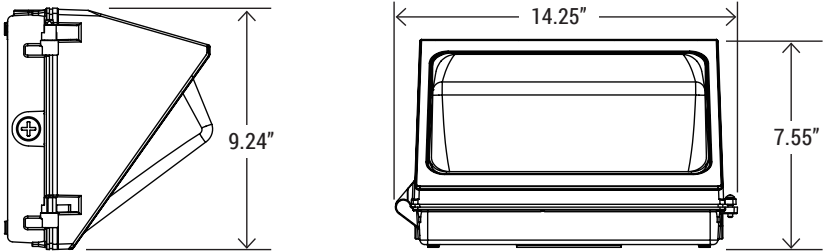

PHOTOCELL OPTION



PSA
Adjustable Photocell



PSB
Photocell

EM BATTERY



EM
LED Emergency Driver



DLC LISTING

CATALOG NUMBER	WATTAGE	DELIVERED LUMENS	EFFICACY	DLC PRODUCT ID	CLASSIFICATION
PT-WPH3-LW-3CP	75W	10,400 @ 4000K	135 lm/W	S-9VT70A	PREMIUM
PT-WPH3-HW-3CP	120W	16,448 @ 4000K	135 lm/W	S-PUQ9GV	PREMIUM