

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

DESCRIPTION

Portor's Wraparound series is designed to save energy and meet lost light regress requirements. Our 9" wraparound is wattage adjustable (30W/35W/40W) and color tunable (35K/40K/50K).

Ideal use for offices, hallways, stairwells, bathrooms and conference rooms.



CONSTRUCTION

Sleek slim design wraparound with durable and solid form factor frame. Made out of quality aluminum alloy body with white finish.

ELECTRICAL

Luminaire is built with high efficacy LED package 120V-277V universal drivers.

OPTICAL SYSTEM

High performance light output perfect for high ceiling. Optic lens designed to reduce glare and improve light distribution through precision lens optics.

ENERGY SAVINGS

Over 50% energy savings compare to fluorescent fixtures. Low heat production from LED technology will require overall less maintenance and operating cost.

DIMMING

Equipped with 1-10V continuous dimming.

MOUNTING

Comes standard with V-Hooks and chains, Option available for Pendant Mount.

CONTROLS

Option available for dimmers, occupancy sensors and daylight harvesting to maximize energy savings.

LISTING

UL Listed, DLC Premium Listed

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours (See Warranty documentation for details).

5200-4655-4080

WATTAGE	DELIVERED LUMENS	EFFICACY
30W	4080 @ 5000K	136 lm/W
35W	4655 @ 5000K	133 lm/W
40W	5200 @ 5000K	130 lm/W

Based on the wattage @ 5000K setting. Actual lumens may vary.

TECHNICAL SPECIFICATION

WATTAGE	30W/35W/40W
CCT	3500K/4000K/5000K
CRI	82
DIMMABLE	0-10V dimming
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
THD	≤10%
WORKING TEMPERATURE	-40°F ~ 122°F
STORAGE TEMPERATURE	-40°F ~ 158°F
IP RATING	IP40, Suitable for damp locations
WARRANTY	5 year limited




ORDERING SAMPLE: - - - - -

Series	Size	CCT/Wattage	Accessories/Options		
PT-WA2 LED Wraparound Series	4F71 (4 ft / 7 in width)	3CP (35K/40K/50K) (30W/35W/40W)	EM Battery ___ Blank EM	Sensor ___ Blank MS	Mounting ___ Blank A-CBL

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

DIMENSION

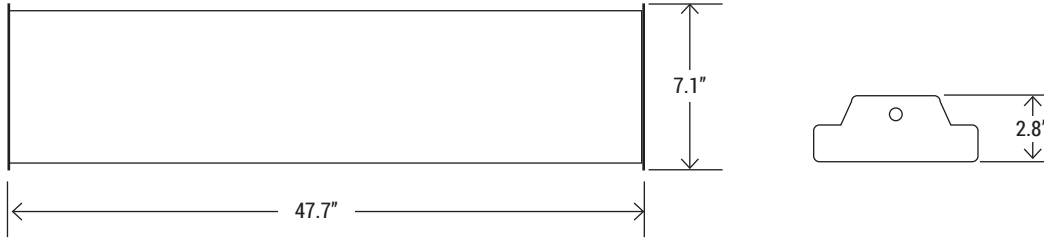

SENSOR OPTION



MS
Motion Sensor



MSH-RC2
Intelligent Control Unit

SUSPENDED MOUNTING



A-CBL
Hanging wire for strip light w/ V-hook

EM BATTERY OPTION



EM
LED Emergency Driver



DLC LISTING

CATALOG NUMBER	WATTAGE	DELIVERED LUMENS	EFFICACY	DLC PRODUCT ID	CLASSIFICATION
PT-WA2-4F7I-3CP	30W	4080@5000K	up to 137 lm/W	S-CQ5ZKH	PREMIUM
	35W	4655@5000K			
	40W	5280@5000K			

