

R-2

INCANDESCENT FIXED OPTICS THERMOPLASTIC EMERGENCY UNIT



STANDARD



ILLUMINATION

- Two fixed optics 5.4 watt glare-free lamp heads.
- Smooth thermoplastic reflector and plastic lens.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (Low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- ETL Listed for damp locations (20°C – 50°C).

DIMENSIONS

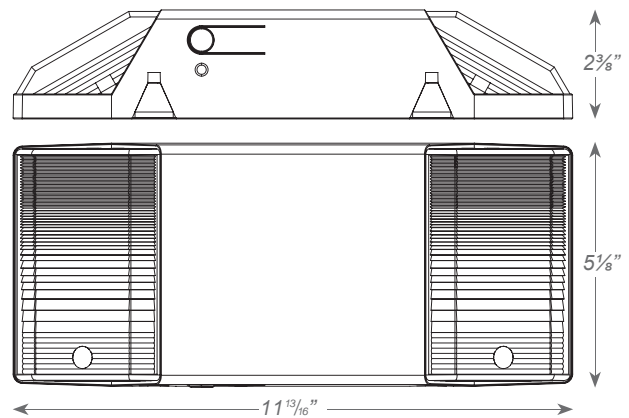

ORDERING INFORMATION

Sample Part Number: R-2

Special voltage options available.
Check with your Best Lighting
Representative.

MODEL	HOUSING COLOR	
R-2	(blank)	White
	B	Black