



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The RDISA-LED is a specification grade, Volumetric Recessed LED Luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened appearance to the modern office environment.

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal.




FEATURES & BENEFITS

- Volumetric recessed luminaire provides a low glare light source
- Matte white reflective surface for soft, uniform light distribution
- Multiple diffuser options available
- Min CRI 82
- Easy access plate for quick wiring
- Heat removal slots on the side of housing remove heat and prevent dust from entering the unit from the plenum
- 5 year warranty


DIMENSIONS

- 1x4**
12"Wx47"Lx3.26"H
- 2x4**
12"Wx47"Lx3.26"H
- 2x2**
24"Wx24"Lx3.26H

2x4

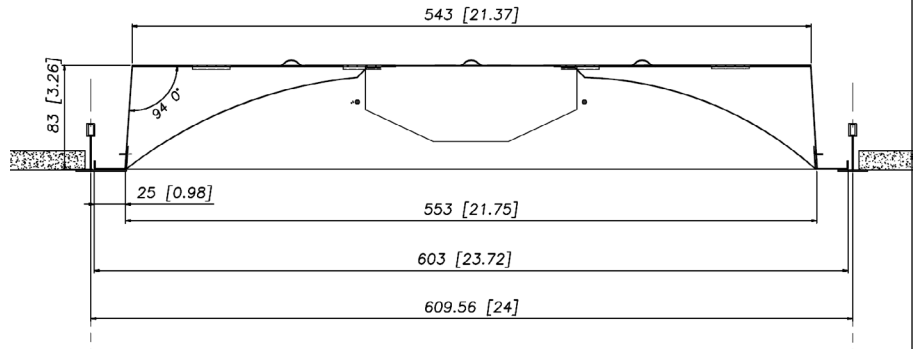

End View

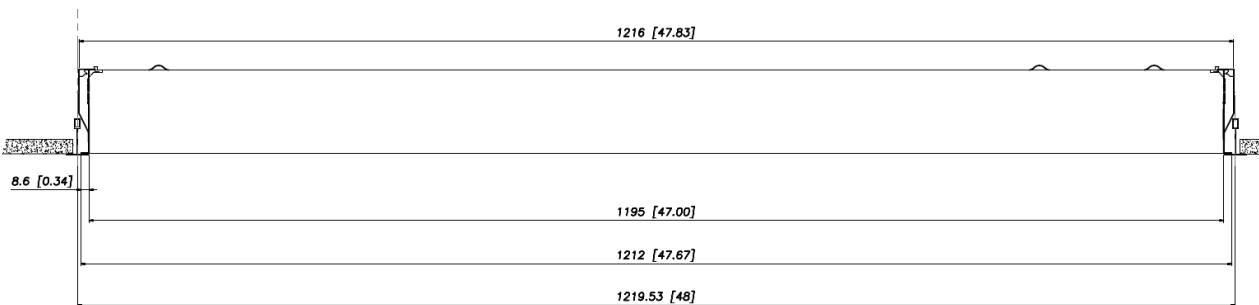

Side View

Dimensions and specifications subject to change without notice.





JOB NAME:


CAT#:

TYPE:

DIMENSIONS

- 1x4**
12"Wx47"Lx3.26"H
- 2x4**
12"Wx47"Lx3.26"H
- 2x2**
24"Wx24"Lx3.26H

2x2

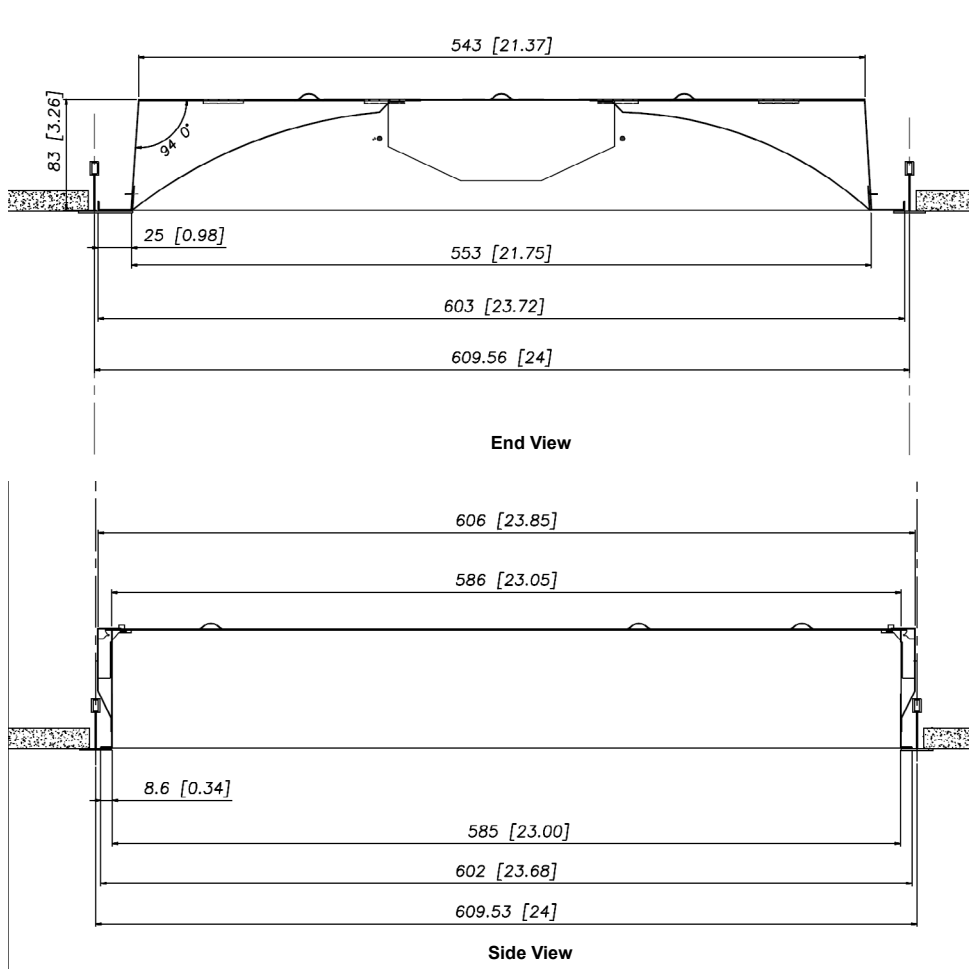

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RDISA 14 LED 28 FR DMV 30 EM SS WP

RDISA		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. LENS	6. LENS MATERIAL	7. COLOR TEMP				
RDISA	14 1X4 22 2X2 24 2X4	LED	1X4		FR Frosted Lens PF Perforated Basket	DMV 0-10V Dimming 120-277VAC Multivolt SDMV Step Dimming 120-277VAC 100%-40%	30 3000K 35 3500K 40 4000K 50 5000K			
			28 28 Watts 3200 Lumens							
			32 32 Watts 3620 Lumens							
			48 48 Watts 5450 Lumens							
			57 57 Watts 6080 Lumens							
			60 60 Watts 6430 Lumens							
			2X2							
			20 20 Watts 2440 Lumens			D120 120V Dimmable				
			24 24 Watts 3030 Lumens			D347V 347VAC 0-10V Dimmable				
			28 28 Watts 3500 Lumens			D277 Triac Dimming 277VAC				
			30 30 Watts 3630 Lumens							
			35 35 Watts 4200 Lumens							
			42 42 Watts 4800 Lumens							
			2X4							
			28 28 Watts 3200 Lumens							
			32 32 Watts 3620 Lumens							
			48 48 Watts 5450 Lumens							
			57 57 Watts 6080 Lumens							
			60 60 Watts 6430 Lumens							
			62 62 Watts 6900 Lumens							
			72 72 Watts 7000 Lumens							

8. EMERGENCY(O) ¹		9. SENSOR(O) ¹		10. WHIP(O) ¹	
EM	10 Watt 1300 Lumen Battery Backup	SS	Integrated Sensor	WP	6 ft. 3 wire mc whip
EM5	Emergency Battery Pack 5W~650 Lumens	PF	Perforated Basket		
EM4F	Emergency Battery Pack 4W~450 Lumens	RL	Ribbed Acrylic		

Notes:
¹(O) is optional

Dimensions and specifications subject to change without notice.

