

JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Low profile dual basket RDISD is ideal for shallow plenum spaces. Specification grade, direct/indirect dual diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened "sky light" appearance to the modern office environment.

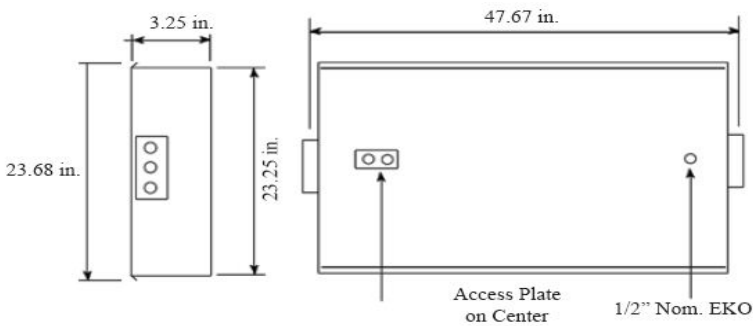
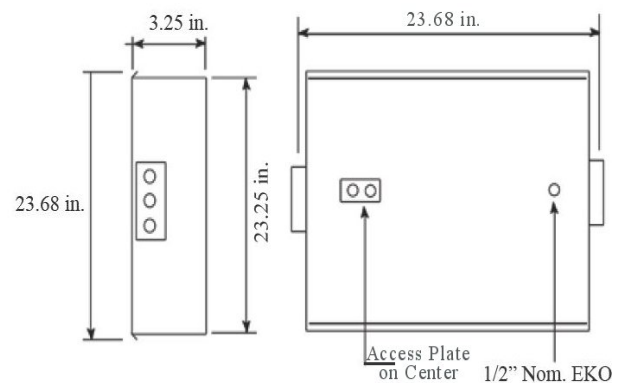
Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Diffusers snap into place with no tools required for removal.



FEATURES & BENEFITS

- Direct/indirect mimics "sky light" appearance
- Matte white reflective surfaces for soft, uniform light distribution
- For use in recessed inverted T-Bar or grid ceilings
- Every fixture is individually tested
- IC Rated
- 5 Year Warranty
- cETL_{us} listed for damp location up to 67 watts

DIMENSIONS

TOP VIEW 2X2

TOP VIEW 2X4


Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RDISD 22 LED 28 DMV FR 30 EM

RDISD		LED																	
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS/BASKET	7. COLOR TEMP													
RDISD LED low profile dual basket	14 1x4 Nominal	LED	1x4		DMV 120-277V Multivolt 0-10V Dimmable	FR Frosted	30 3000K												
	22 2x2 Nominal		28 28 Watts 3500 Lumens	SDMV Step dimming Multivolt			PR Perforated Basket w/ inlay	35 3500K											
	24 2x4 Nominal		32 32 Watts 4000 Lumens					D347 347VAC 0-10V Dimming	RL Ribbed Linear	40 4000K									
			48 48 Watts 6000 Lumens							50 5000K									
			57 57 Watts 7125 Lumens							2x2		TDMV Triac Dimming 120-277VAC							
			60 60 Watts 7500 Lumens							20 20 Watts 2500 Lumens	D120 Triac Dimming 120VAC								
			20 20 Watts 2500 Lumens							24 24 Watts 3000 Lumens			D277 Triac Dimming 277VAC						
			24 24 Watts 3000 Lumens							28 28 Watts 3500 Lumens									
			28 28 Watts 3500 Lumens							30 30 Watts 3750 Lumens									
			30 30 Watts 3750 Lumens							35 35 Watts 4375 Lumens									
			35 35 Watts 4375 Lumens							42 42 Watts 5250 Lumens				2x4					
			42 42 Watts 5250 Lumens							28 28 Watts 3500 Lumens									
	28 28 Watts 3500 Lumens	32 32 Watts 4000 Lumens																	
	32 32 Watts 4000 Lumens	38 38 Watts 4750 Lumens																	
	38 38 Watts 4750 Lumens	48 48 Watts 6000 Lumens																	
	48 48 Watts 6000 Lumens	57 57 Watts 7125 Lumens																	
	57 57 Watts 7125 Lumens	60 60 Watts 7500 Lumens																	
	60 60 Watts 7500 Lumens	62 62 Watts 7750 Lumens																	
	62 62 Watts 7750 Lumens	72 72 Watts 9000 Lumens																	
	72 72 Watts 9000 Lumens																		

8. EMERGENCY(O) ¹		9. CORD(O) ¹	
EM	Emergency Battery Pack 10W ~ 1700 lumens	WP	6' 3 Wire Flexible Conduit
EM5	Emergency Battery Pack 5W ~ 850 Lumens	WP5	6' 5 Wire Flexible Conduit (For EM)
		WPFID	6' 5 Wire Flexible Conduit (For DMFVID)

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

