



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The RDISE LED is a specification grade, Volumetric Recessed LED Luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened appearance to the modern office environment.

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal.




FEATURES & BENEFITS

- Volumetric recessed luminaire provides a low glare light source
- Matte white reflective surface for soft, uniform light distribution
- 0-10V dimming driver standard
- Easy access plate for quick wiring
- IC rated
- cETL_{us} Listed for damp locations up to 67 watts
- Min CRI 82

DIMENSIONS

1x4 VIEW

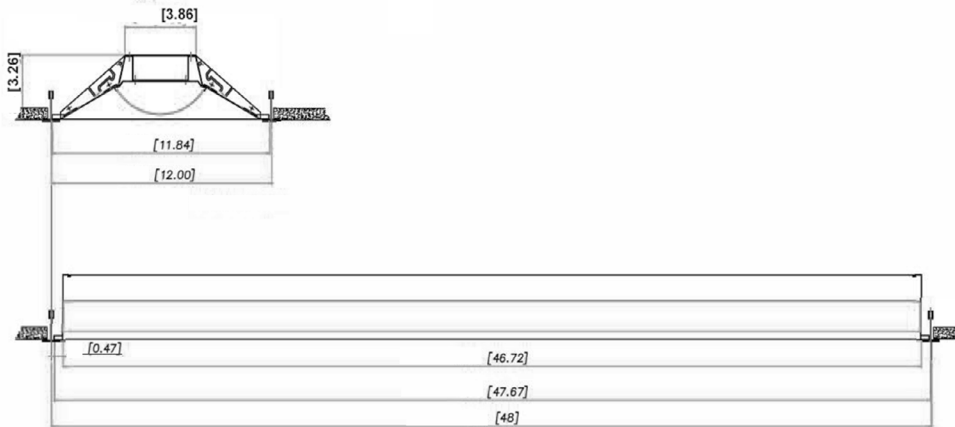

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:


TYPE:

DIMENSIONS

2x2 VIEW

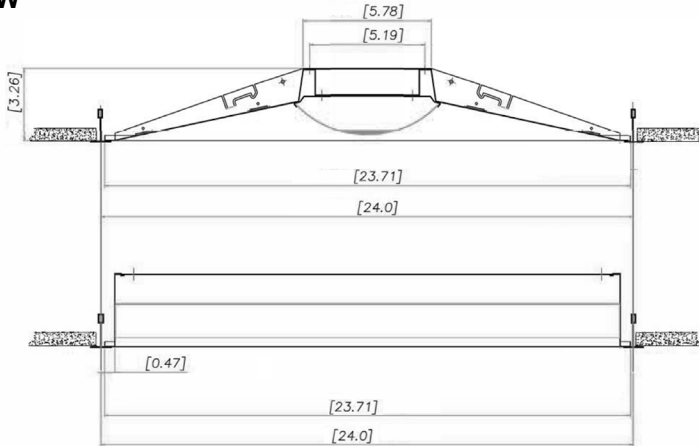

2x4 VIEW

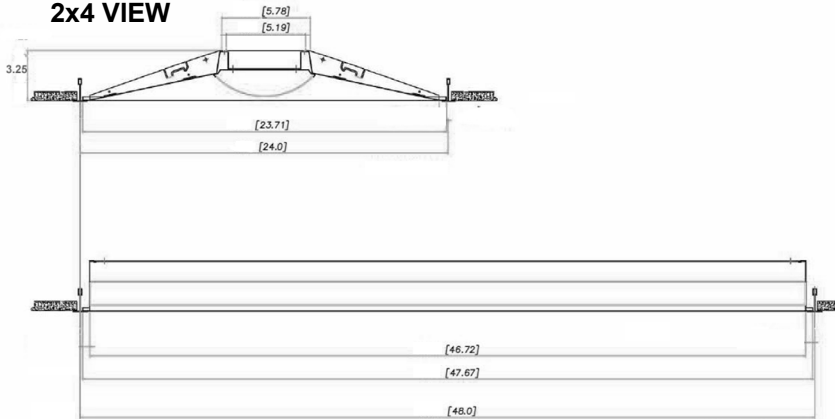

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RDISE 14 LED 15 DMV FR 30 EM SNS200

RDISE		LED		5. DRIVER		6. LENS		7. COLOR TEMP	
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS ¹						
RDISE	14 1x4	LED	1x4 Standard		DMV	120-277V Multivolt 0-10V Dimmable		FR	Frosted Lens
	22 2x2		15	15 Watts 1940 Lumens	SDMV	Step dimming Multivolt		30	3000K
	24 2x4		22	22 Watts 3145 Lumens	D347V	347VAC 0-10V Dimming		35	3500K
			30	30 Watts 4015 Lumens	D120	Triac Dimming 120VAC		40	4000K
			35	40 Watts 5140 Lumens	D277	Triac Dimming 277VAC		50	5000K
			40	40 Watts 5140 Lumens					
			48	48 Watts 6025 Lumens					
			57	57 Watts 7020 Lumens					
			2X2 Standard						
			18	18 Watts 2115 Lumens					
			20	20 Watts 2535 Lumens					
			24	24 Watts 3015 Lumens					
			30	30 Watts 3605 Lumens					
			2X4 Standard						
			15	15 Watts 1955 Lumens					
			22	22 Watts 3145 Lumens					
			30	30 Watts 4095 Lumens					
			32	32 Watts 4305 Lumens					
			35	35 Watts 4535 Lumens					
			40	40 Watts 5245 Lumens					
	48	48 Watts 6155 Lumens							
	57	57 Watts 7210 Lumens							

DLC Listed Models	
RDISE14-LED22FRDMVxx	xx = Color Temp 30,35,40,50
RDISE14-LED30FRDMVxx	xx = Color Temp 30,35,40,50
RDISE14-LED35FRDMVxx	xx = Color Temp 30,35,40,50
RDISE14-LED40FRDMVxx	xx = Color Temp 30,35,40,50
RDISE14-LED48FRDMVxx	xx - Color Temp 30,35,40,50
RDISE14-LED57FRDMVxx	xx = Color Temp 30,35,40,50
RDISE22-LED18FRDMVxx	xx = Color Temp 30,35,40,50
RDISE22-LED20FRDMVxx	xx = Color Temp 30,35,40,50
RDISE22-LED24FRDMVxx	xx = Color Temp 30,35,40,50
RDISE22-LED30FRDMVxx	xx = Color Temp 30,35,40,50
RDISE24-LED22FRDMVxx	xx = Color Temp 30,35,40,50
RDISE24-LED30FRDMVxx	xx = Color Temp 30,35,40,50
RDISE24-LED32FRDMVxx	xx = Color Temp 30,35,40,50
RDISE24-LED35FRDMVxx	xx = Color Temp 30,35,40,50
RDISE24-LED40FRDMVxx	xx = Color Temp 30,35,40,50
RDISE24-LED48FRDMVxx	xx = Color Temp 30,35,40,50
RDISE24-LED57FRDMVxx	xx = Color Temp 30,35,40,50



8. EMERGENCY (O) ²	
EM	Emergency Battery Pack 10W ~ 1700 lumens
EM5	Emergency Battery Pack 5W ~ 850 Lumens

9. SENSOR (O) ²	
SNS200	Occupancy Sensor w/ Daylight Harvesting

Notes:
¹Consult for other wattages
²(O) is optional

Dimensions and specifications subject to change without notice.

