


# REL21-1

120/277V AC

Catalog #:		Type
Project:		Date
Prepared by:		

## Compact High Output Emergency

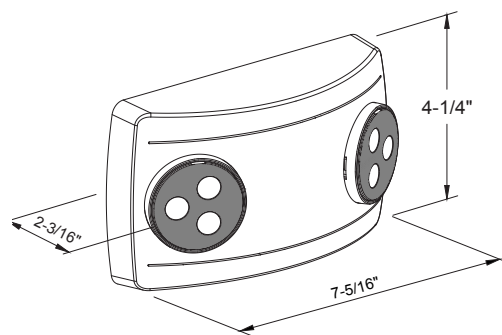

### DESCRIPTION

This compact low profile, high output, self-contained emergency unit works well in long hallway or large space applications where wider unit spacing is appropriate. The adjustable heads allow you to put the light where you want.

### DESIGN FEATURES

#### Construction

- Injection molded thermoplastic ABS housing with 5VA flame retardant.
- Adjustable clear lens heads

#### Electrical

- 120/277V AC dual voltage - 60 HZ
- Standard Operating Temperature: 10°C (50°F) to 40°C (104°F)
- 2 Adjustable 1.5W LED Heads | 300 lms total | 5700K CCT
- 3.6V, 800 mAh, rechargeable Ni-Cad HT battery
- 48 hour recharge after 90 minute discharge
- Manual test switch and LED indicator on bottom of unit
- 90 minutes of illumination in case of power failure

#### Installation

- Suitable for ceiling and wall mount over standard recessed J-Box configuration
- Top and side knockouts for conduit applications

#### Wet Location Option

- Includes REL-200 Wet Location Cover



#### Certifications

- UL Listed for damp location to UL 924 standards
- Meets and exceeds all appropriate NFPA life safety codes
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

### ORDERING GUIDE

Example: REL21-1-W

Model #	Description
REL21-1	Wide Lens / White Housing
REL21-1-W	Wide Lens / White Housing / Wet Location
REL21-1BK	Wide Lens / Black Housing
REL21-1BK-W	Wide Lens / Black Housing / Wet Location

For Cold Weather (-C) and Narrow Lens (-N) Options, please refer to REL21 Specification Sheet

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

7/21/22



LED Light Source

Other Components




RP LIGHTING • FANS

# REL21-1

120/277V

## Spacing Charts

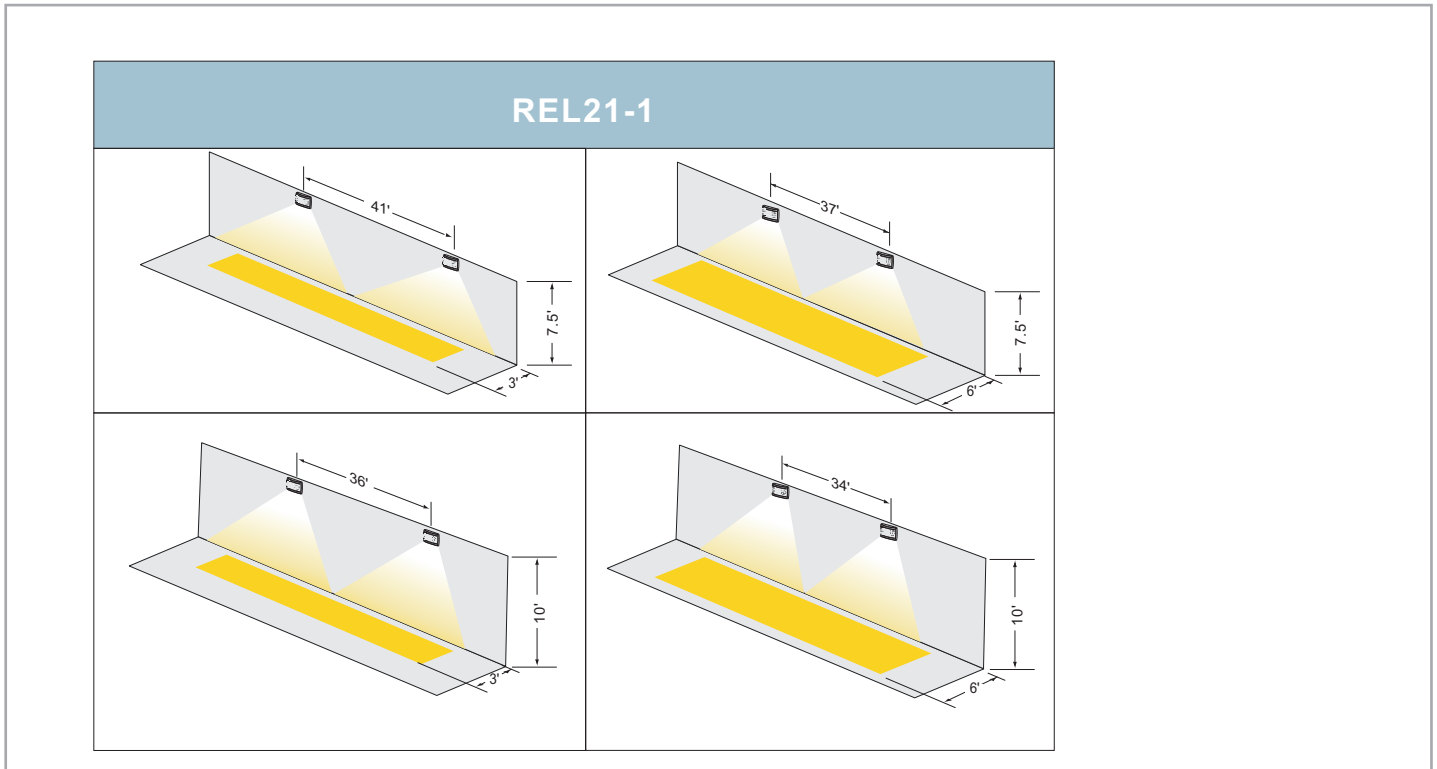

REL21-1 - Compact High Output Emergency