



# RH16

## INCANDESCENT MR16 INDOOR THERMOPLASTIC REMOTE HEADS

ACCESSORIES

### ILLUMINATION

- High performance MR16 halogen lamps with smooth metallized reflector and glass lens for optimal light distribution.
- Adjustable 6V and 12V lamp heads provide optimal center-to-center spacing

### ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

### MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

### WARRANTY / LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### DIMENSIONS

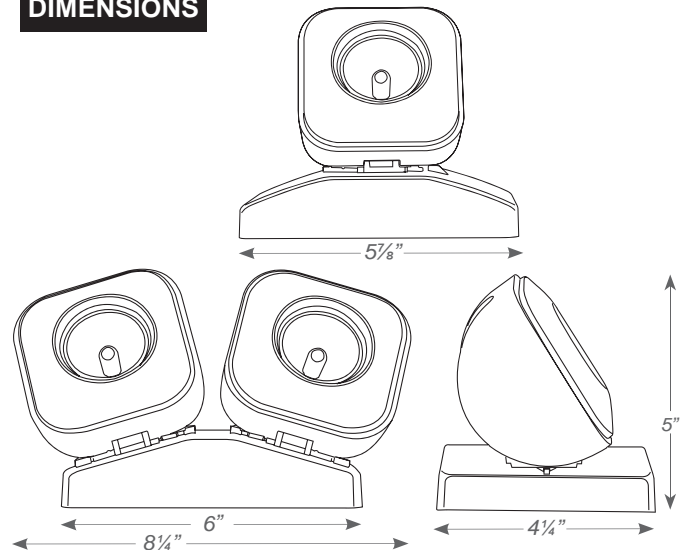

### FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

MODEL TYPE	6V	12V	MODEL TYPE	6V	12V
NYDXR-50		X	TFX-2	X	
RMR-16-65	X		NYDXR-27	X	
RMR-16-125		X	EZXTE-RC	X	
R-5HO	X		CXTE-RC	X	
R-16-HO	X		DXR-125/1210		X
DXR-65/610	X		CALEDXTE	X	
LEDCADXR	X		CADXR-65/610	X	
LEDSDXR	X		CADXR-125/1210		X
CWLEZXTE-RC	X		LEDCADXR	X	
CAR-65	X				
CAR-125		X			

### ORDERING INFORMATION

Sample Part Number: RH16-1-6V12W

MODEL	No. of HEADS	COLOR	VOLTAGE	WATTAGE <sup>1</sup>
RH16	1 Single Head	(blank) White	6V	5.0W <sup>2</sup> 5.0 Watts
	2 Double Head	B Black	12V	7.0W <sup>2</sup> 7.0 Watts
				10.0W <sup>2</sup> 10.0 Watts
				12.0W 12.0 Watts

<sup>1</sup> Wattage rating stated per head.

<sup>2</sup> Available in 6V units only.

RH16