



Project	
Notes	
Type	Date
Cat. No.	

RWS™ Series

LED Ringed Wall Sconce

DESCRIPTION

The RWS Series is a contemporary wall sconce fixture updated with the latest in LED technology. The RWS provides accent illumination that visually expands the space and creates a relaxing atmosphere. The long LED life coupled with exceptional color rendering make this fixture attractive for new or retrofit projects. Ideal for use in hallways, stairways, dining areas, foyers and meeting rooms for residential and commercial applications.



RWS Series
9W(900Lumens)

Rated Life 50,000 hours
Limited Warranty 3 years
Efficacy Up to 100 LPW

Quick Ship
RWS-9-120-930-NS



Specification Features

Construction

Contemporary styled fixture. Two twin steel rings surrounded a frosted glass diffuser designed to eliminate glare and optimize lumen output.

Certification

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

Warranty

3-year Limited Warranty. See warranty documentation for more information.

Electrical

Equipped standard with 120V 15-100% triac dimming driver.

Installation

Designed for wall mounting on 4" electrical J-Box.

Ordering Information

Example: RWS-9-120-930-NS

RWS	9	120	9	40	NS
Series RWS LED Ringed Wall Sconce	Rated Wattage 9-9W,(900Lumens) ²	Driver Type 120- 120V ²	CRI 9 90+ CRI	Color Temp 30-3000 K ² 40-4000 K ^{1 2}	Finish NS- Nickel Satin ² ORB-Oil Rubbed Bronze ^{1 2}

Specifications and Dimensions subject to change without notice.

Performance Summary

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 100 LPW (typ.)
CRI	90+, R9 > 0
Available CCT ¹	3000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	50,000 hours
L70 ³	> 72,000 hours or > 45,000
Power Factor	> 0.9
THD	< 20%
Dimming	N/A
Operating Temp.	-18°C to 40°C

Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Frosted Glass		RWS-9-120-930-NS	9	900	100

NOTES:


- ¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- ² Energy star listed
- ³ Quick ship: 3000K. Other CCTs may require a lead time or be special order
- ⁴ Typical color consistency. May vary or be changed.
- ⁵ L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- ⁶ Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice.

Product Dimensions

RWS-9

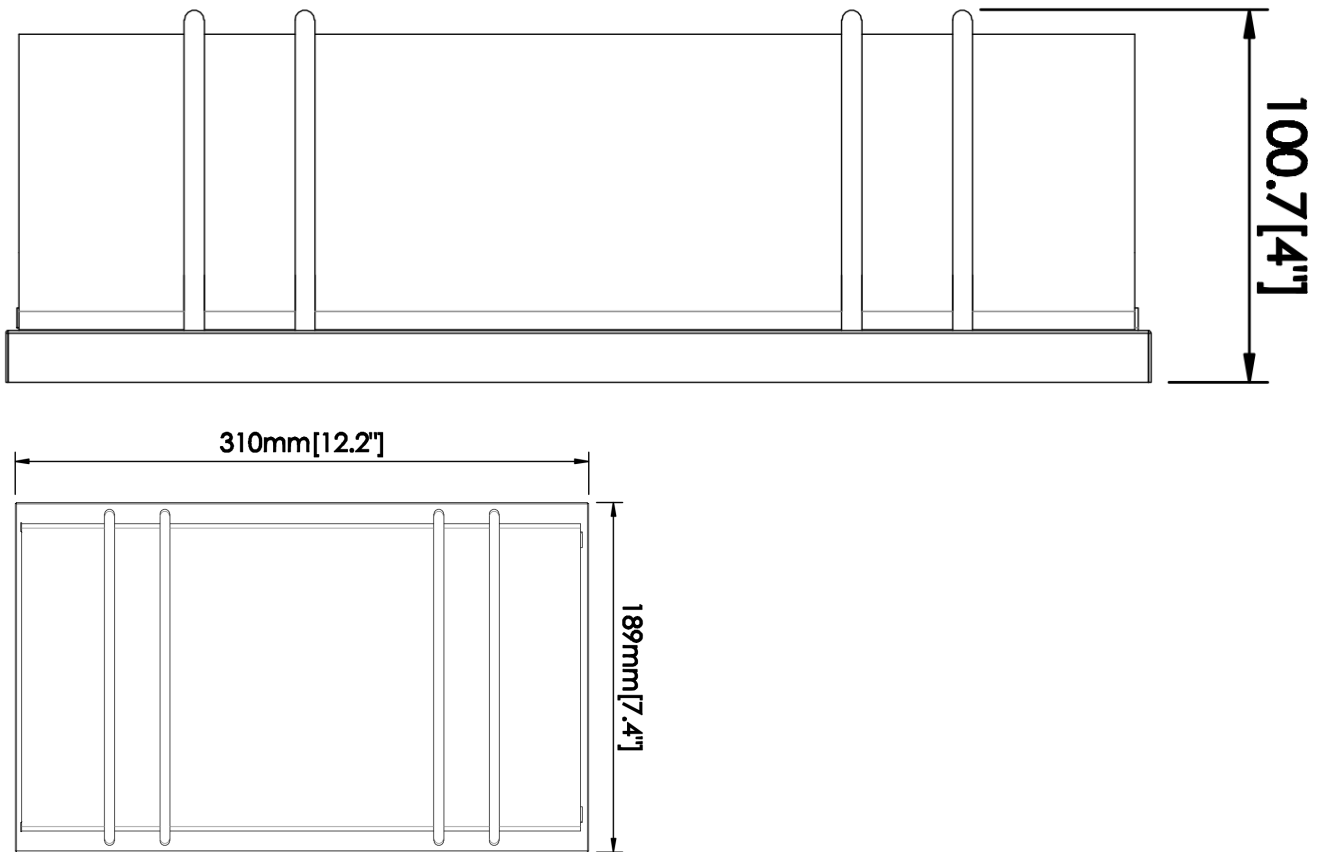

GlobaLux
LIGHTING