



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Specification grade, recessed perimeter elliptical wall wash to highlight wall and shelf mounted goods in commercial and retail environments. Provides uniform VERTICAL surface lighting.


Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel. Access plate with wiring knockouts are provided on one side of housing. Ballast is accessed from side, through adjacent ceiling tile. Premium, full specular reflectors at sides and ends create a professional finish and control the wall wash lighting distribution.



FEATURES & BENEFITS

- Recessed inverted T-bar ceilings. Grid mount.
- Perimeter highlight for wall and shelf mounted goods
- "Silver" full bright reflectors maximize efficiency, light output, and control wall wash distribution
- IC Rated
- Access plate to simplify installation
- Every fixture is individually tested
- cETL_{us} listed for damp location

DIMENSIONS

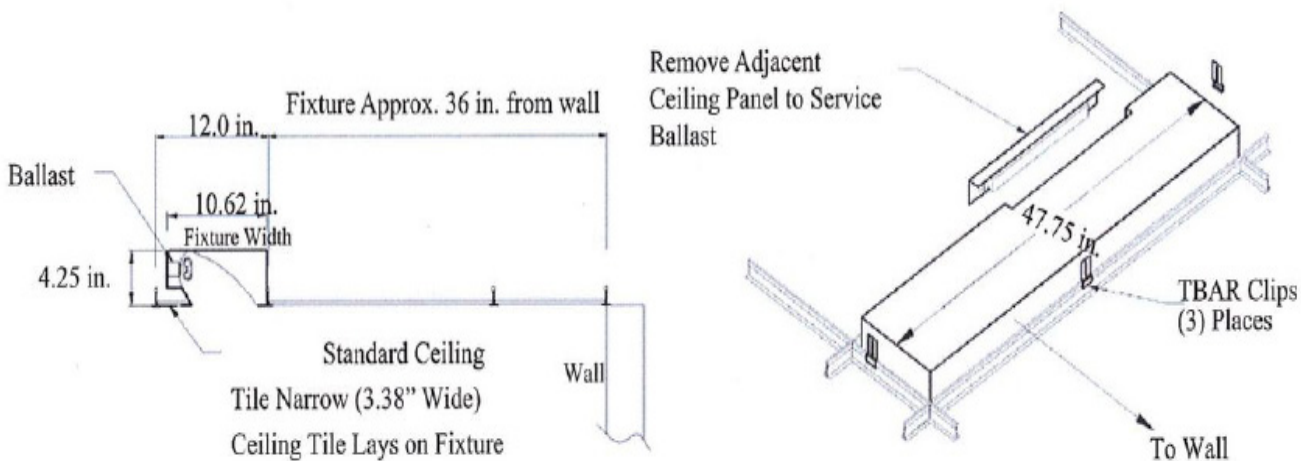

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RWW 24 LED 24 DMV 30 WP

RWW		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. COLOR TEMP		7. WHIP
RWW	24 24" 48 48"	LED	<u>24 in.</u> 24 24 Watts 2400 Lumens 35 35 Watts 3400 Lumens		DMV 0-10V Dimming 120-277VAC Multivolt		30 3000K 35 3500K 40 4000K 50 5000K	WP 6 ft. 3 wire 18 gauge whip WP10 6 ft. 4 wire 18 gauge whip	
			<u>48 in.</u> 24 24 Watts 2400 Lumens 48 48 Watts 4800 Lumens 57 57 Watts 5700 Lumens 72 72 Watts 7200 Lumens		SDMV Step Dimming 120-277VAC 100%-40%				
					D120 120V Dimmable DHV 347VAC 0-10V dimmable D347V 347VAC 0-10V Dimmable D277 Triac Dimming 277VAC				

Dimensions and specifications subject to change without notice.

